

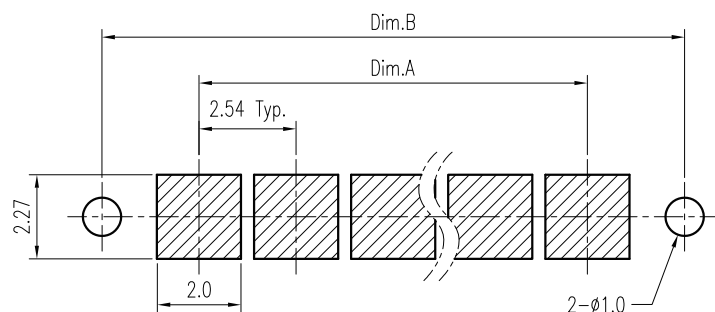
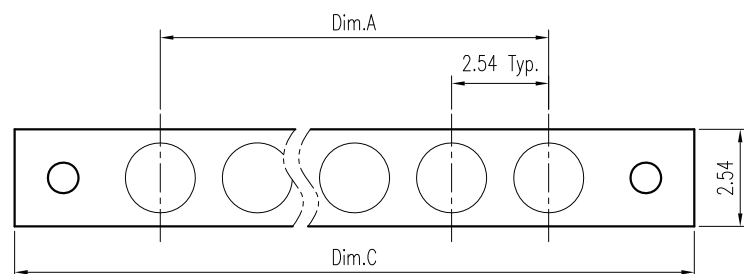



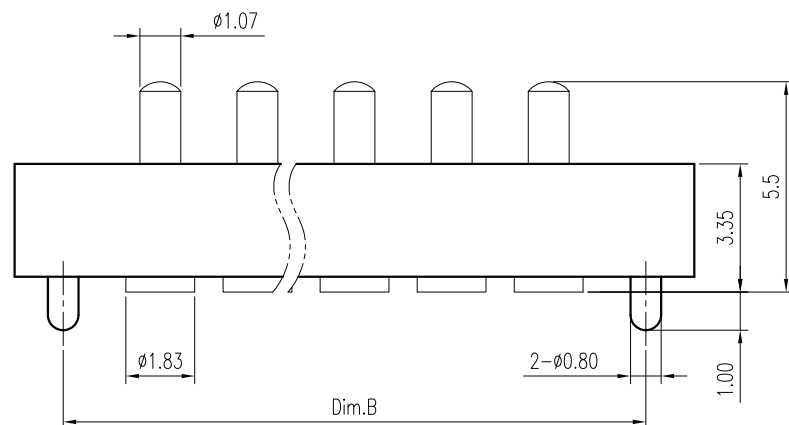

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

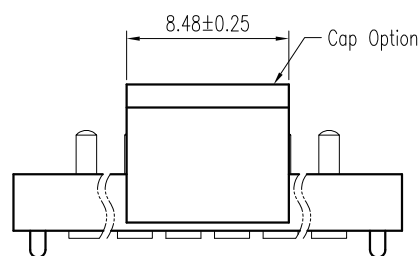

With Cap
Scale 2.5:1

Notes:

- Material :
Housing : Thermoplastic UL 94V-0
Terminal : Copper Alloy
- Finish :
Terminal : 20u" Gold on Contact Area, 10u" Gold on Solder Tails, Both over 100u" Ni Under-plated Overall
- Spring Pin Force : $0.6N \pm 0.15N$ at 0.7mm

Dimension Information:

Part No.	Dim.	Pins	Dim.A	Dim.B	Dim.C
PGP26-V55PC-1X02	2	2.54	7.62	10.16	
PGP26-V55PC-1X03	3	5.08	10.16	12.70	
PGP26-V55PC-1X04	4	7.62	12.70	15.24	
PGP26-V55PC-1X05	5	10.16	15.24	17.78	
PGP26-V55PC-1X06	6	12.70	17.78	20.32	
PGP26-V55PC-1X07	7	15.24	20.32	22.86	
PGP26-V55PC-1X08	8	17.78	22.86	25.40	
PGP26-V55PC-1X09	9	20.32	25.40	27.94	
PGP26-V55PC-1X10	10	22.86	27.94	30.48	
PGP26-V55PC-1X11	11	25.40	30.48	33.02	
PGP26-V55PC-1X12	12	27.94	33.02	35.56	
PGP26-V55PC-1X13	13	30.48	35.56	38.10	
PGP26-V55PC-1X14	14	33.02	38.10	40.64	
PGP26-V55PC-1X15	15	35.56	40.64	43.18	
PGP26-V55PC-1X16	16	38.10	43.18	45.72	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PGP26-V55PC-1Xxx-LF
SERIES | | | LEADFREE
1X02:02WAY
1X16:16WAY
CAP
POST
HIGH 5.5mm
180°SMT

DESCRIPTION: 2.5mm Pitch Pin Header Single Type