


- Notes:
1. Material:
Housing: Thermoplastic UL 94V-0, Black
Terminal: Piston: Brass
Barrel: Brass
Spring: Stainless Steel
Cap: Thermoplastic, Black
 2. Finish:
Terminal: Selected Gold on Contact Area,
Gold Plated on Solder Tails, Both over
Nickel Under-plated Overall
 3. Mechanical Characteristics:
Spring Force: $0.85N \pm 0.2N$ at Working Height
Life Cycle: 10000 Cycles
 4. Electrical Characteristics:
Current Rating: 2A
Voltage Rating: 30V
Contact Resistance: 50m ohm Max.
at Working Height(Static State)
 5. To avoid arcing issue, The adaptor start to power
 6. To ensure the best usage, please operate it based supply after connector mated fully
 7. Based on the Engineering Drawing, shall not exceed on the working height
the maximum allowed compress

Dimension Information:

Amount of Pins	Dim.A	Dim.B	Dim.C
2	2.54	7.62	10.16
3	5.08	10.16	12.70
4	7.62	12.70	15.24
5	10.16	15.24	17.78
6	12.70	17.78	20.32
7	15.24	20.32	22.86
8	17.78	22.86	25.40
9	20.32	25.40	27.94
10	22.86	27.94	30.48
11	25.40	30.48	33.02
12	27.94	33.02	35.56
13	30.48	35.56	38.10
14	33.02	38.10	40.64
15	35.56	40.64	43.18
16	38.10	43.18	45.72

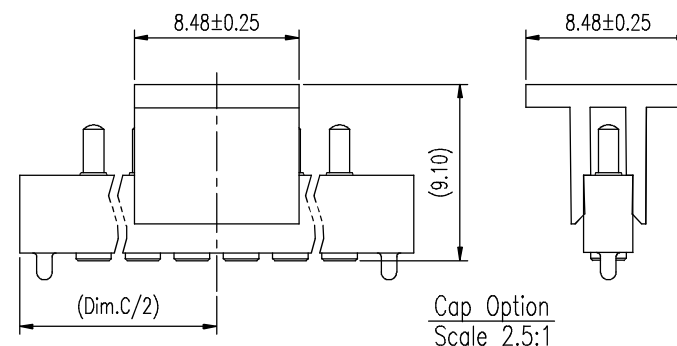

Cap Option
Scale 2.5:1

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE _____

SIZE A4

SCALE 1 : 1

TOLERANCES ARE

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

ON

照片框

ORDER INFORMATION

PGP26-V70P44C-1Xxx-LF

SERIES

180°SMT

LEADFREE
02~16 WAY

		CAP
	1	10mm LUCU

4.40mm HIGH
POST

TOTAL HIGH 7.00mm

DESCRIPTION: 2.54mm Pitch Pogo Pin Conn.