
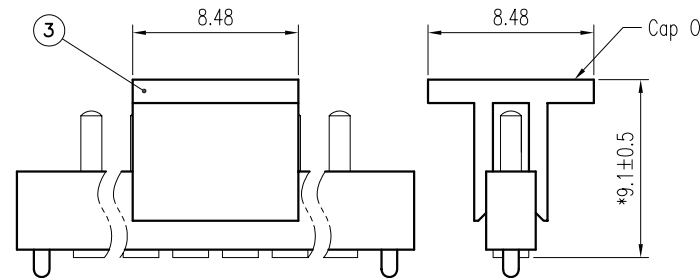
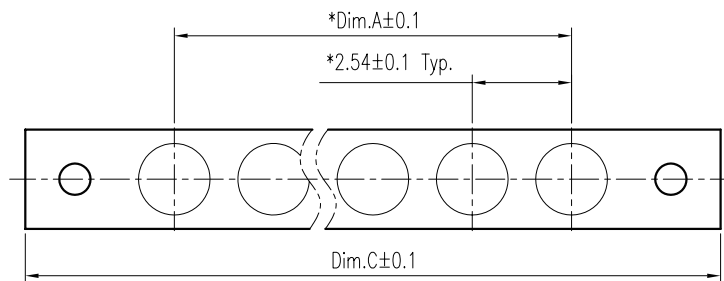
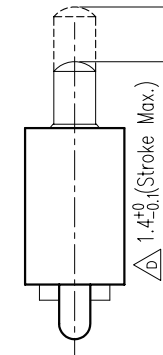
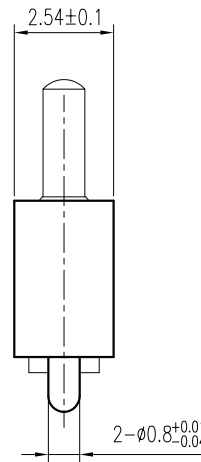


- Notes: 1. 材質:  
 膠芯: LCP + 30% G.F., UL 94V-0  $\triangle$   
 端子: 銅合金  
 Cap: LCP全次料  
 2. 電鍍:  
 端子: 對接區: 20u" Min. 金  
 焊接區: 10u" Min. 金  
 鍍底: 100u" Min.

# Dimension Information:

| Part No.         | Dim.<br>Amount<br>of Pins | Dim.A | Dim.B | Dim.C |
|------------------|---------------------------|-------|-------|-------|
| PGP26-V75PC-1X02 | 2                         | 2.54  | 7.62  | 10.16 |
| PGP26-V75PC-1X03 | 3                         | 5.08  | 10.16 | 12.70 |
| PGP26-V75PC-1X04 | 4                         | 7.62  | 12.70 | 15.24 |
| PGP26-V75PC-1X05 | 5                         | 10.16 | 15.24 | 17.78 |
| PGP26-V75PC-1X06 | 6                         | 12.70 | 17.78 | 20.32 |
| PGP26-V75PC-1X07 | 7                         | 15.24 | 20.32 | 22.86 |
| PGP26-V75PC-1X08 | 8                         | 17.78 | 22.86 | 25.40 |
| PGP26-V75PC-1X09 | 9                         | 20.32 | 25.40 | 27.94 |
| PGP26-V75PC-1X10 | 10                        | 22.86 | 27.94 | 30.48 |
| PGP26-V75PC-1X11 | 11                        | 25.40 | 30.48 | 33.02 |
| PGP26-V75PC-1X12 | 12                        | 27.94 | 33.02 | 35.56 |
| PGP26-V75PC-1X13 | 13                        | 30.48 | 35.56 | 38.10 |
| PGP26-V75PC-1X14 | 14                        | 33.02 | 38.10 | 40.64 |
| PGP26-V75PC-1X15 | 15                        | 35.56 | 40.64 | 43.18 |
| PGP26-V75PC-1X16 | 16                        | 38.10 | 43.18 | 45.72 |

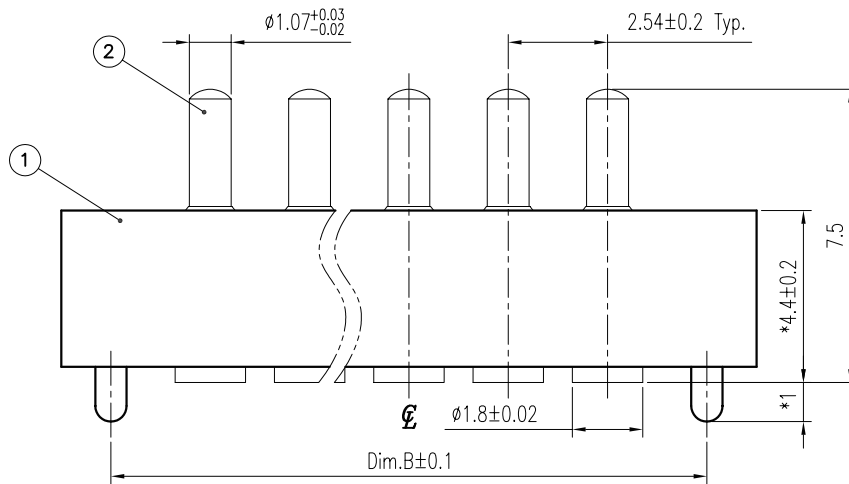

With Cap  
 Scale 10:1

## RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

照片框

## ORDER INFORMATION

PGP26-V75PC-1Xxx-LF

SERIES

180°SMT

CAP

POST

HIGH 7.5mm

LEADFREE

1X02:02 WAY

1X16:16 WAY

DESCRIPTION: 2.54mm Pitch Spring Pin Conn.