


PIN HEIGHT	DIM.	DIM E
3.5mm~5.5mm		2.95
6.0mm~7.5mm		4.00

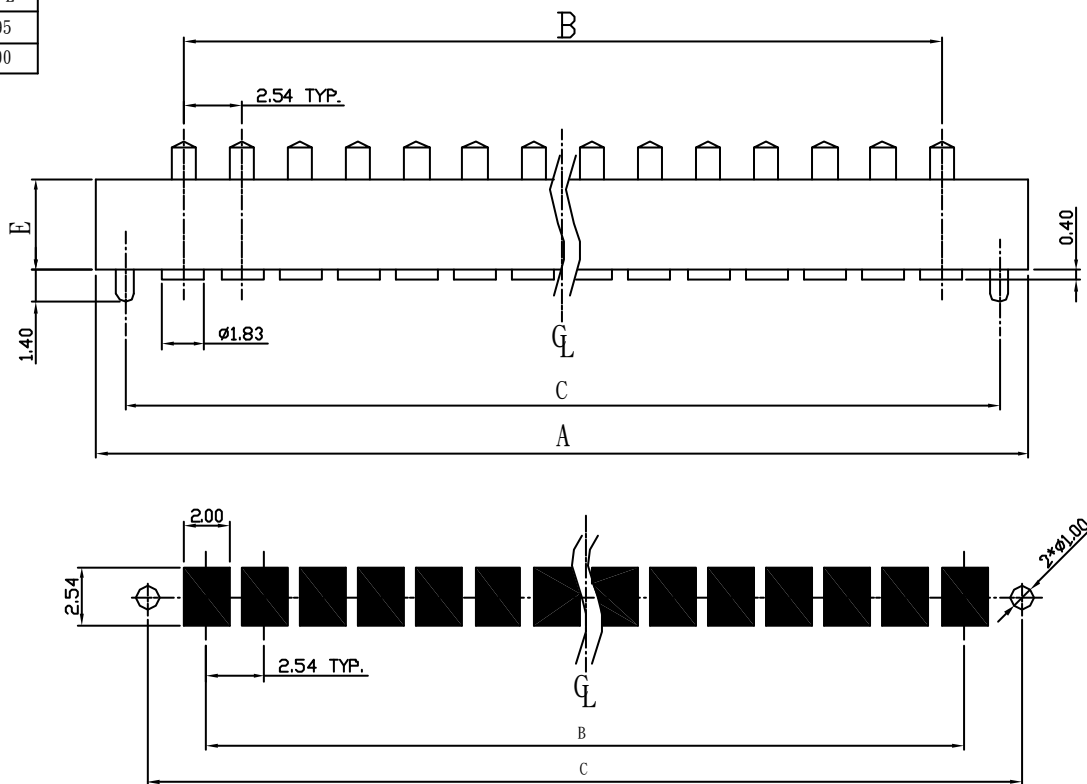

NOTES :

- Material :
Housing : Thermoplastic , UL 94V-0
Terminal : Copper Alloy
- Finish :
Terminal : 0.5um Au / 2.5um Ni

RECOMMENDED P.C.B. LAYOUT
LAYOUT TOLERANCE = ± 0.05 mm

PIN No.	DIM	DIM A	DIM B	DIM C
02		10.16	2.54	7.62
03		12.70	5.08	10.16
04		15.24	7.62	12.70
05		17.78	10.16	15.24
06		20.32	12.70	17.78
07		22.86	15.24	20.32
08		25.40	17.78	22.86
09		27.94	20.32	25.40
10		30.48	22.86	27.94
11		33.02	25.40	30.48
12		35.56	27.94	33.02
13		38.10	30.48	35.56
14		40.64	33.02	38.10
15		43.18	35.56	40.64
16		45.72	38.10	43.18

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

PGP26-VxxxP-1Xxx-LF

SERIES
180°SMT
DIM L: 035:3.5mm, 042:4.25mm, 045:4.5mm, 050:5.0mm, 055:5.5mm
POST: 060:6.0mm, 065:6.5mm, 070:7.0mm, 075:7.5mm
LEADFREE: 1X02:02WAY, 1X16:16WAY

DESCRIPTION: 2.54mm PITCH PIN HEADER (SPRING PIN SINGLE TYPE)