
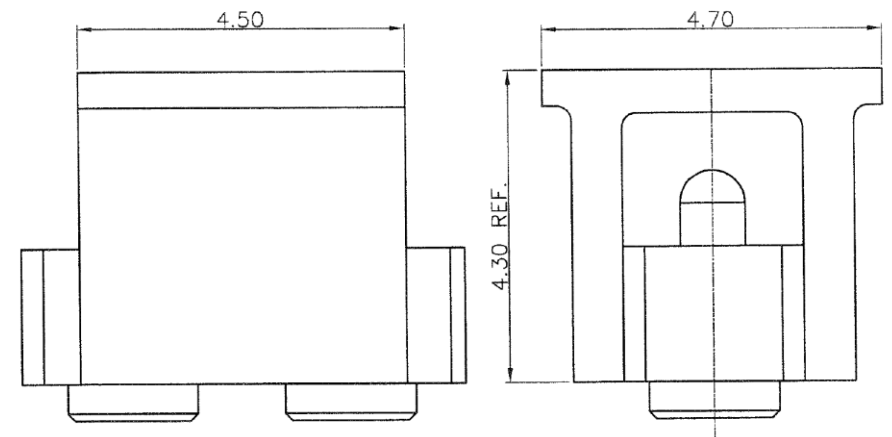


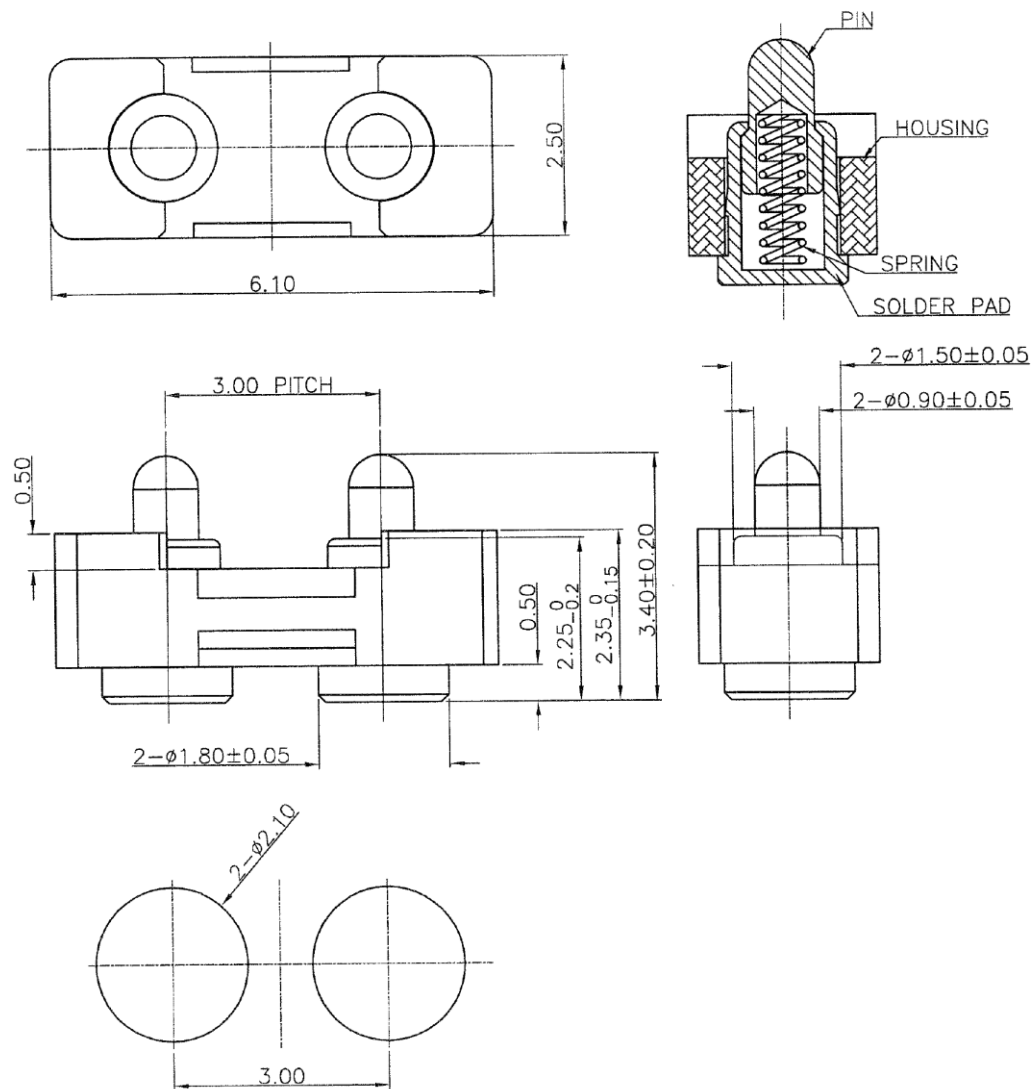

NOTES:

1 MATERIAL:

- 1-1 PIN & SOLDER PAD : COPPER ALLOY
- 1-2 SPRING : SWP-B,PIANO WIRE OR EQUIVALENT
- 1-3 HOUSING : THERMOPLASTIC,UL94-0,BLACK.

2 FINISH:

- 2-1 PIN: GOLD PLANTING 5u*MIN. OVER 80~120u*NICKEL PLATING
- 2-2 TUBE: GOLD PLANTING 4u*MIN. OVER 80~120u*NICKEL PLATING
- 2-3 SPRING:GOLD PLANTING 4u*MIN. OVER 50u*NICKEL PLATING.
- 2-4 ROHS COMPLIANCE PRODUCT

3 MECHANICAL SPECIFICATION:

- 3-1 SPRING FORCE: 0.80N MIN @ 1.00 mm DEFLECTION
- 3-2 FULL SPRING: 1.05mm
- 3-3 DURABILITY : 2,000 cycles

4 ELECTRICAL SPECIFICATION :

- 4-1 RATING VOLTAGE : 12V RMS
- 4-2 RATING CURRENT : 1.0A MAX.
- 4-3 CONTACT RESISTANCE : 50 mOhms MAX @ 1.00 mm

RECOMMEND P.C.B. LAYOUT
(TOLERANCE±0.05mm)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ± 0.5°

PPOJECTION

照片框

ORDER INFORMATION

PGP30-V34XC-1X02-LF

SERIES

180°SMT

CAP

NON POST

TOTAL HIGH 3.40mm

02 WAY

LEADFREE

DESCRIPTION: