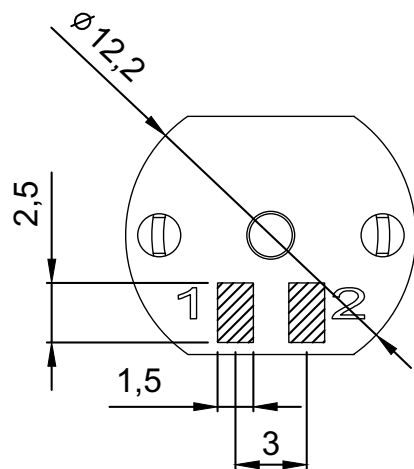
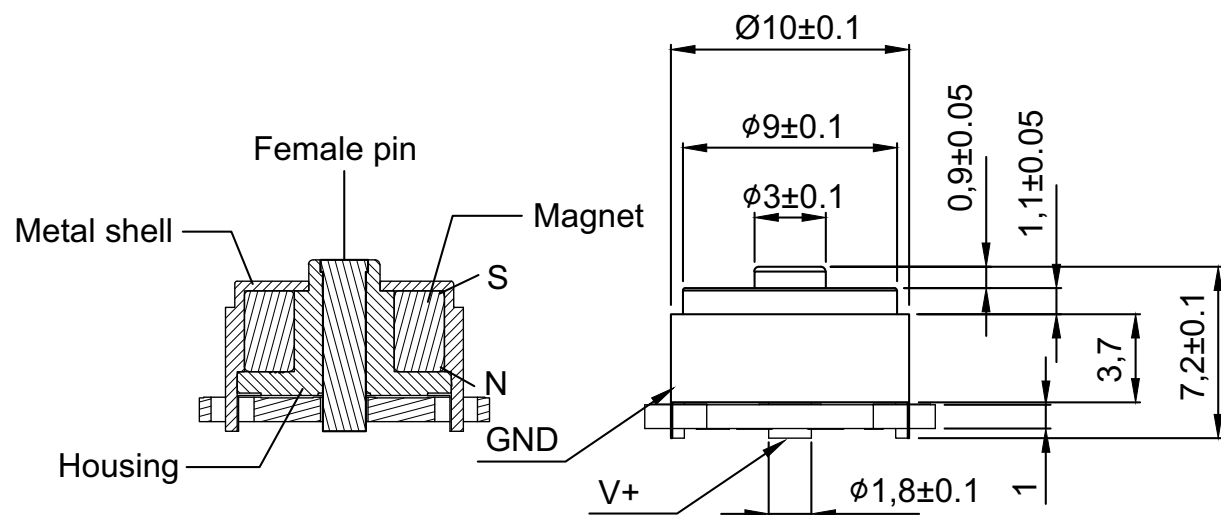


1.Electrical / 电气性能

1.1 Current Rate / 电流 : 1A

1.2 Contact Resistance / 接触电阻 : 50 mΩ

2.Environmental / 环境

2.1 Operating temperature range / 工作温度 : -40℃ ~ 80℃

3.Material / 材料


3.1 Pin / 母针 : Brass C3604, 5u" gold Plating

3.2 Housing / 塑胶 : PA66 + 30% GF

3.3 Magnet / 磁铁 : NdFeB , N52

3.4 Metal shell / 金属壳 : Brass , Ni

3.4 PCB : FR-4,Green/绿色

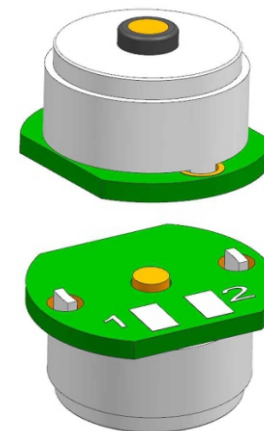

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PGS-DBMS-01-LF

SERIES

LEADFREE

01 WAY

MAGNETIC SUCTION

DIP+PCB

DESCRIPTION: 1Pin magnetic female connector