




Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	
2	Solder pin	4	Leaded Brass	Gold plating over Copper-Zinc plating
3	Magnet	2	NdFeB	Nickel plating
4				
5				

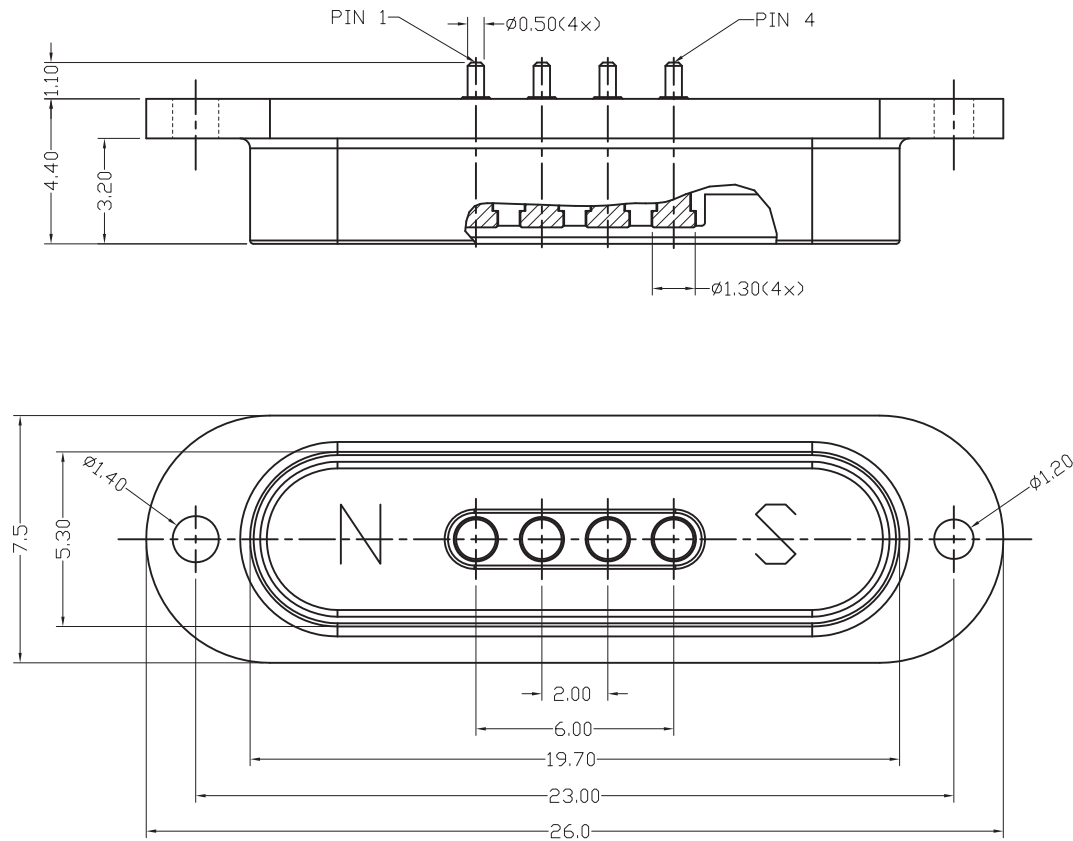

PIN ASSIGNMENTS		
Contact Number	Signal Name	Color
PIN 1	VCC	Red
PIN 2	D+	Green
PIN 3	D-	White
PIN 4	GND	Black

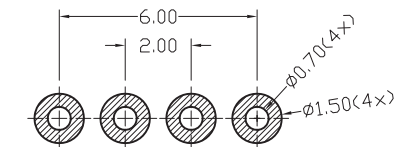

Recommended PCB Layout

NOTES:

1. SPECIFICATION:

1.1 ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2.0A

LOW LEVEL CONTACT RESISTANCE: 30m Ω Max.

PIN ASSIGNMENTS SEE TABLE

1.2 ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE : -40°C TO +85°C.

2. PACKAGING: IN BULK.

3. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.

4. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PGS20-D044MS1-1X04-LF

SERIES

LEADFREE

04WAY

MAGNETIC SUCTION

HIGH 4.40mm

DIP 180°

DESCRIPTION: POGO PIN CONNECTOR