

1.Electrical / 电气性能

1.1 Current Rate / 电流 : 1 A

1.2 Contact Resistance / 接触电阻 : 50 mΩ




2.Environmental / 环境

2.1 Operating temperature range / 工作温度 : -40℃ ~ 80℃



3.Material / 材料

3.1 Pin / 针 : Brass, 3u" gold plating

3.2 Housing / 塑胶 : PBT, white

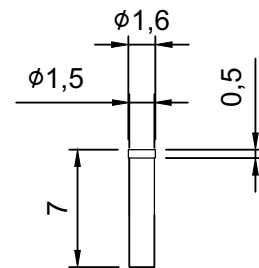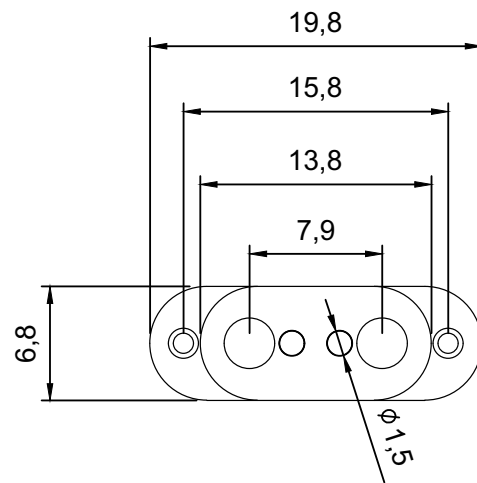

Female pin

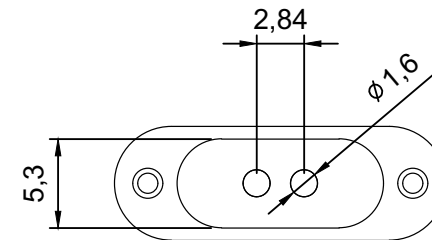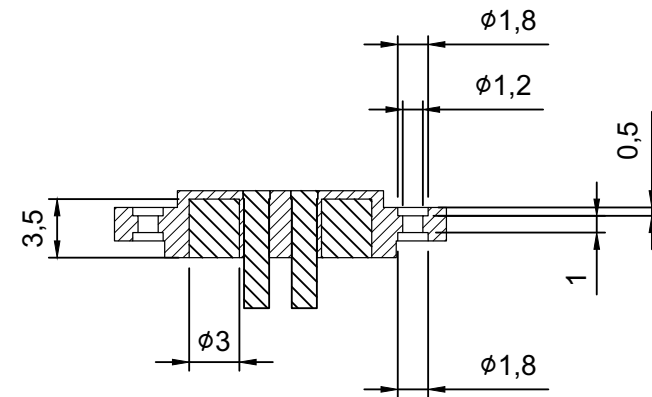

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±

照片框

ORDER INFORMATION

PGS28-D040MS1-1X02-LF

SERIES

LEADFREE

02 WAY

MAGNETIC SUCTION

HIGH 4.0mm

DIP 180°

DESCRIPTION: 2PIN磁吸母座