
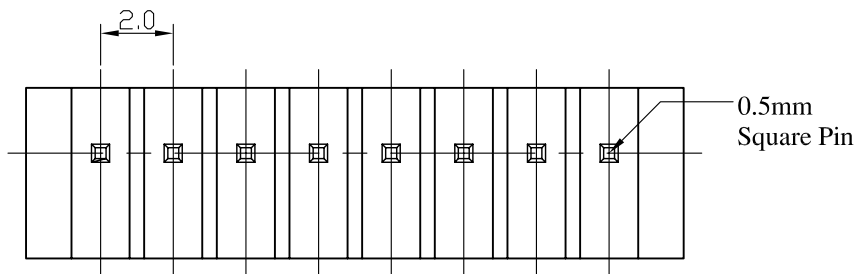
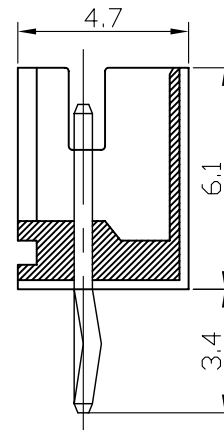


RECOMMENDED P.C. BOARD HOLE DIMM.

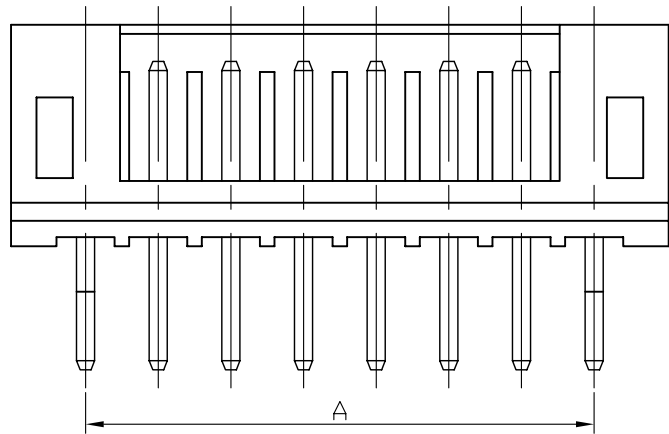

### Specifications

#### Electrical

- Voltage Rating: 100V(AC)
- Current Rating: 2A
- Contact Resistance: 20mΩ max.
- Dielectric Withstandeing Voltage: 800V AC/1min.
- Insulation Resistance: 1000MΩ min.

#### Material

- Circuits: 2~20
- Insulator: Nylon 66 UL 94V-0 + Fiberglass
- Color: White or Natural
- Contact: Brass 0.50mm(0.20") Square Wire Pins
- Plating: Tin or Gold Plated
- Temperature Range: -25° C~+85° C
- Applicable PC Board Thickness: 0.8 to 1.6mm

Poles	Dimension mm (in.)		Part No.
	A	B	
2	2.0(0.079)	6.1(0.240)	PH-DNL-02
3	4.0(0.157)	8.1(0.318)	PH-DNL-03
4	6.0(0.236)	10.1(0.397)	PH-DNL-04
5	8.0(0.315)	12.1(0.476)	PH-DNL-05
6	10.0(0.394)	14.1(0.555)	PH-DNL-06
7	12.0(0.472)	16.1(0.634)	PH-DNL-07
8	14.0(0.551)	18.1(0.713)	PH-DNL-08
9	16.0(0.630)	20.1(0.791)	PH-DNL-09
10	18.0(0.709)	22.1(0.870)	PH-DNL-10
11	20.0(0.787)	24.1(0.949)	PH-DNL-11
12	22.0(0.886)	26.1(1.028)	PH-DNL-12
13	24.0(0.945)	28.1(1.106)	PH-DNL-13
14	26.0(1.024)	30.1(1.185)	PH-DNL-14
15	28.0(1.102)	32.1(1.263)	PH-DNL-15
16	30.0(1.181)	34.1(1.343)	PH-DNL-16
17	32.0(1.259)	36.1(1.421)	PH-DNL-17
18	34.0(1.338)	38.1(1.500)	PH-DNL-18
19	36.0(1.417)	40.1(1.579)	PH-DNL-19
20	38.0(1.496)	42.1(1.657)	PH-DNL-20

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PPROJECTION

- X, ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

照片框

#### ORDER INFORMATION



煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.0mm Wire-to-Board Header DIP 180° Type