


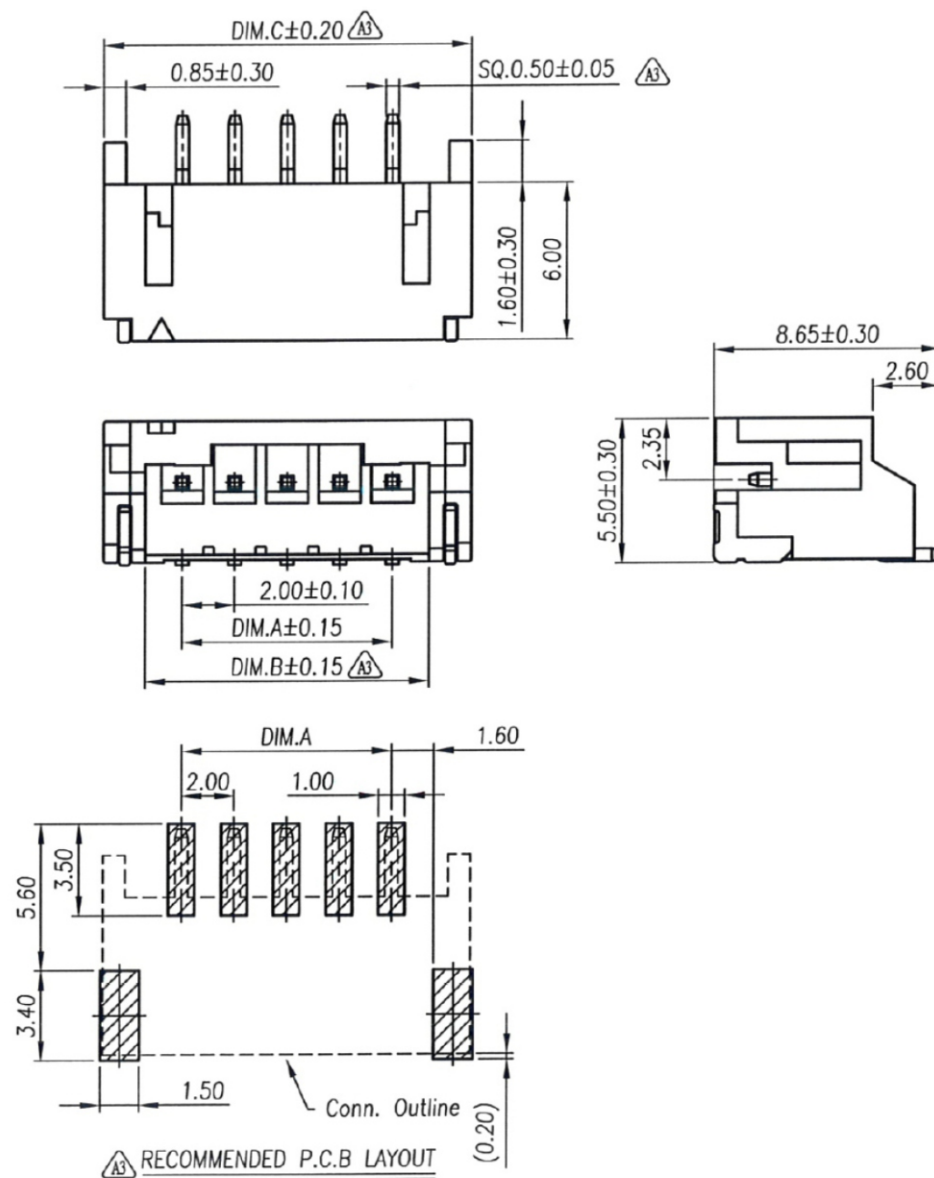

Specification

- 1.Current Rating:2A
- 2.Voltage Rating:100V AC/DC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:1000MΩ Min.
- 5.Dielectric Withstanding Voltage:AC800V/Minute
- 6.Operating Temperature:-25℃~85℃

Material:

- 1.Housing:High Temperature Thermoplastic UL94V-0
- 2.Tab:Copper Alloy
- 3.Contact Pin:Copper Alloy SQ. Pin 0.50mm

Finish:

- 1.Housing: HTN UL94V-0 Natural None H.F.
- 2.Contact PIN: Gold Flash Over Nickel

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	2.00	4.80	8.00	10	18.00	20.80	24.00
03	4.00	6.80	10.00	11	20.00	22.80	26.00
04	6.00	8.80	12.00	12	22.00	24.80	28.00
05	8.00	10.80	14.00	13	24.00	26.80	30.00
06	10.00	12.80	16.00	14	26.00	28.80	32.00
07	12.00	14.80	18.00	15	28.00	30.80	34.00
08	14.00	16.80	20.00	16	30.00	32.80	36.00
09	16.00	18.80	22.00				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±



PPOJECTION

照片框

ORDER INFORMATION



PH-WGR-xx-LF
SERIES T T T LEADFREE
02~16 WAY
REEL
GOLD
90°SMT

DESCRIPTION:

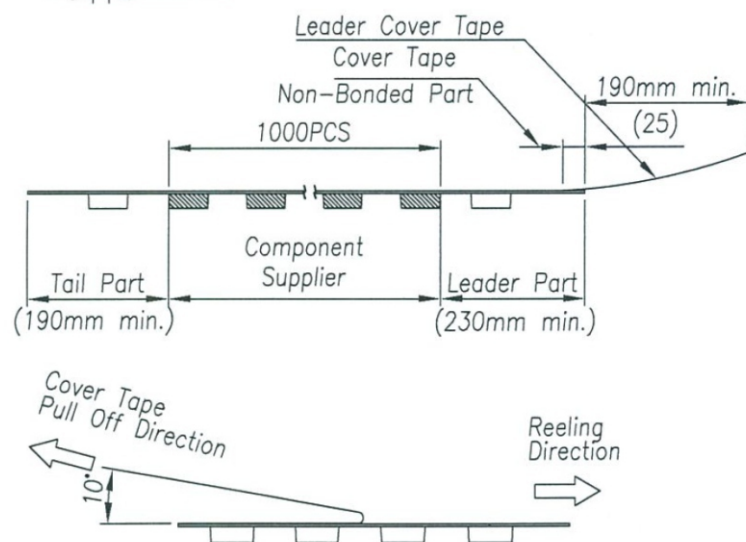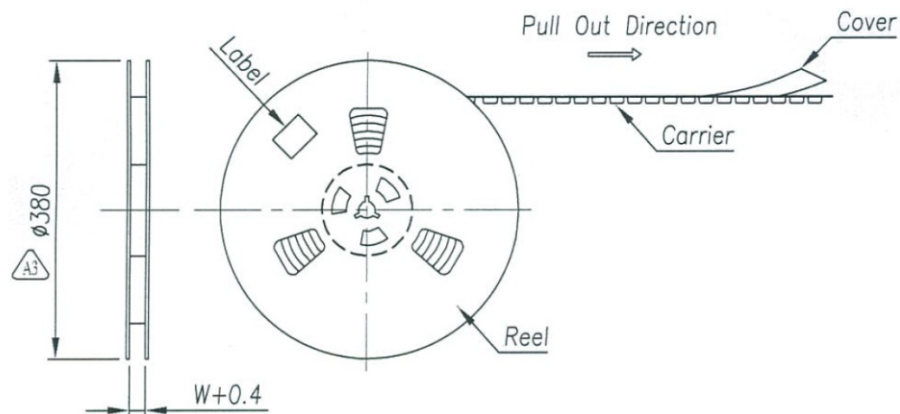

PIN NO.	W±0.30	PCS / REEL
02 ~ 04	24	1000
05 ~ 07	32	
08 ~ 14	44	
15 ~ 16	56	

Notes:
1. Material : PS

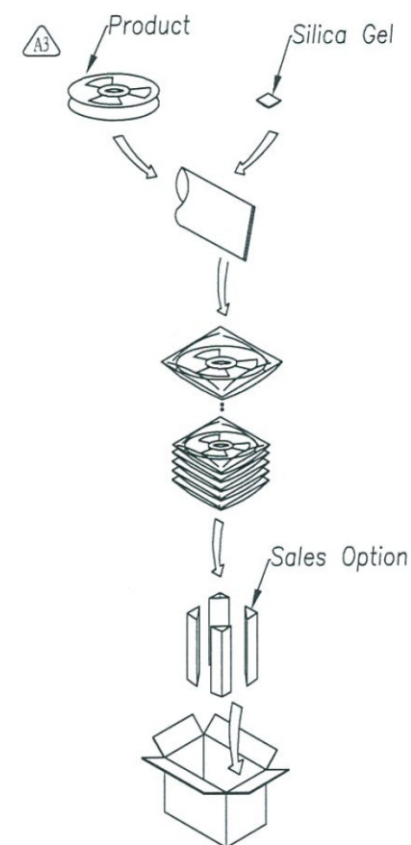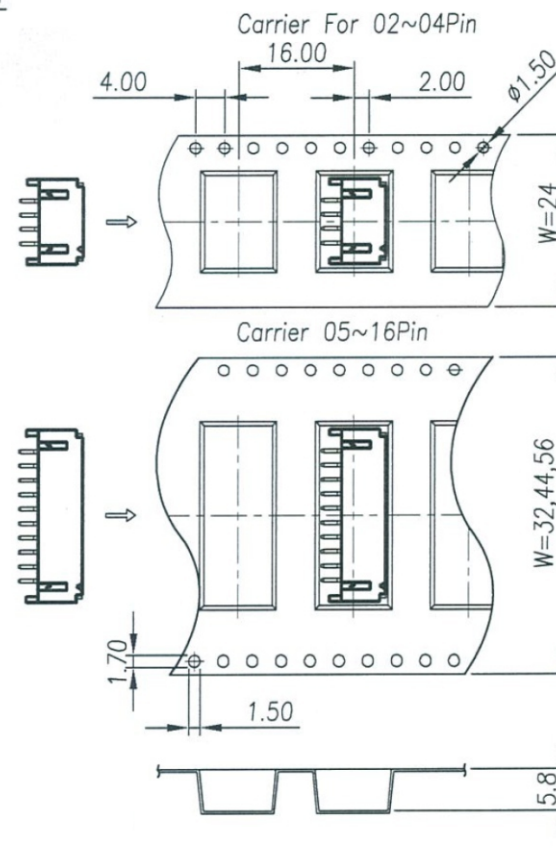

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PH-WGR-xx-LF
SERIES REEL LEADFREE
02~16 WAY
GOLD
90°SMT

DESCRIPTION: