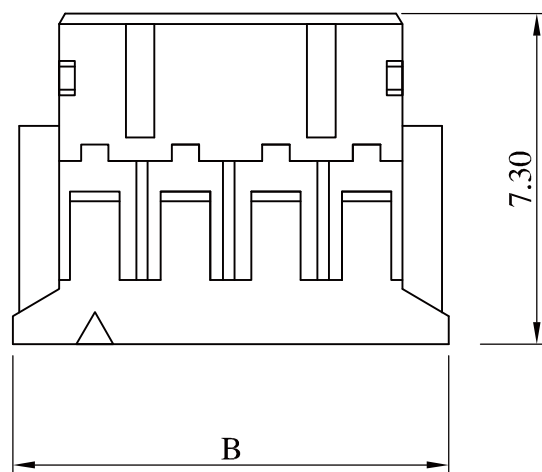
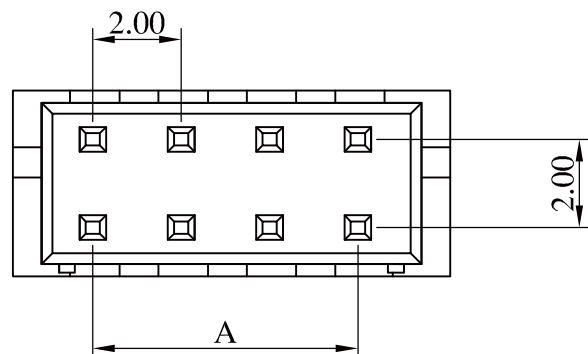


SPECIFICATIONS

Current rating : 2A AC,DC

Voltage rating : 250V AC,DC

Temperature range : -25°C to +85 °C

Conctact resistance : 20mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-0

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.	Note.
	A	B		
2x2	2.00	5.90	PHD-H-04	
2x3	4.00	7.90	PHD-H-06	
2x4	6.00	9.90	PHD-H-08	
2x5	8.00	11.90	PHD-H-10	
2x6	10.00	13.90	PHD-H-12	
2x7	12.00	15.90	PHD-H-14	
2x8	14.00	17.90	PHD-H-16	
2x9	16.00	19.90	PHD-H-18	
2x10	18.00	21.90	PHD-H-20	
2x11	20.00	23.90	PHD-H-22	
2x12	22.00	25.90	PHD-H-24	
2x13	24.00	27.90	PHD-H-26	
2x14	26.00	29.90	PHD-H-28	
2x15	28.00	31.90	PHD-H-30	
2x16	30.00	33.90	PHD-H-32	
2x17	32.00	35.90	PHD-H-34	
2x20	38.00	41.90	PHD-H-40	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

PHD-H-xx-LF
SERIES | LEADFREE
04~40WAY
HOUSING

DESCRIPTION: