

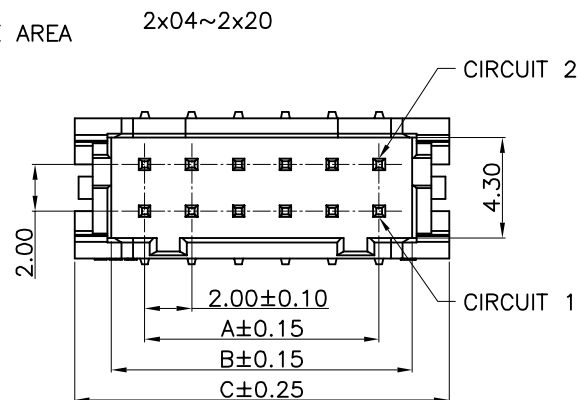
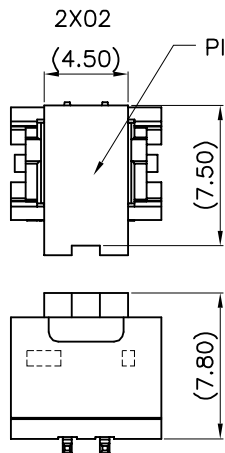

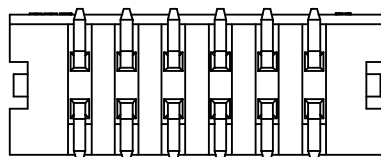



TOLERANCE: ± 0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

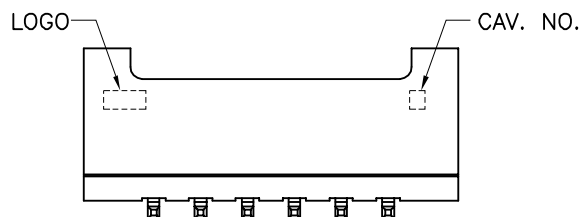

Mating Condition (REF.)

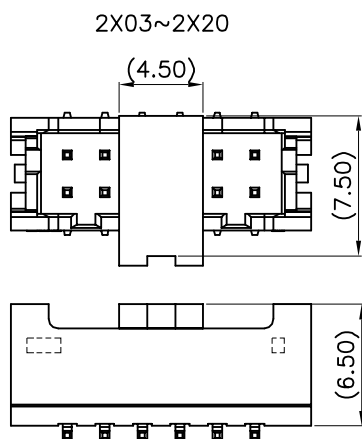

NOTES:
1. MATERIAL:
INSULATION(HALOGEN FREE): NYLON 4T, UL94V-0
COVER(HALOGEN FREE): NYLON 4T, UL94V-0
CONTACT: COPPER ALLOY, 0.50mm SQUARE PIN

PIN	DIM.(mm)			PIN	DIM.(mm)		
	A	B	C		A	B	C
2x02	--	4.84	8.00	2x12	22.00	24.84	28.00
2x03	4.00	6.84	10.00	2x13	24.00	26.84	30.00
2x04	6.00	8.84	12.00	2x14	26.00	28.84	32.00
2x05	8.00	10.84	14.00	2x15	28.00	30.84	34.00
2x06	10.00	12.84	16.00	2x16	30.00	32.84	36.00
2x07	12.00	14.84	18.00	2x17	32.00	34.84	38.00
2x08	14.00	16.84	20.00	2x18	34.00	36.84	40.00
2x09	16.00	18.84	22.00	2x19	36.00	38.84	42.00
2x10	18.00	20.84	24.00	2x20	38.00	40.84	44.00
2x11	20.00	22.84	26.00				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

PHDL-VXC-xx-LF

SERIES
LEADFREE
04~40WAY
CAP
NON POST
180°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 2.00mm, VERTICAL, SMT TYPE, ASSEMBLY