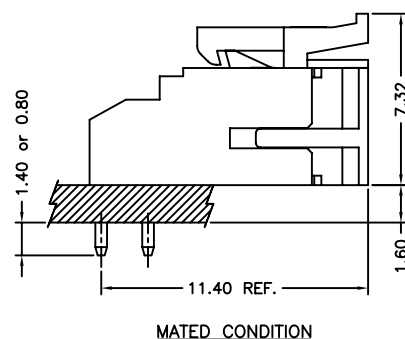
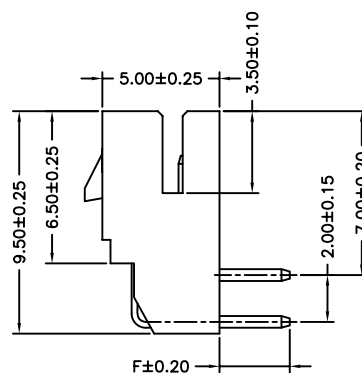
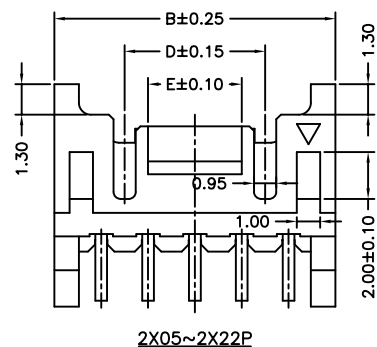
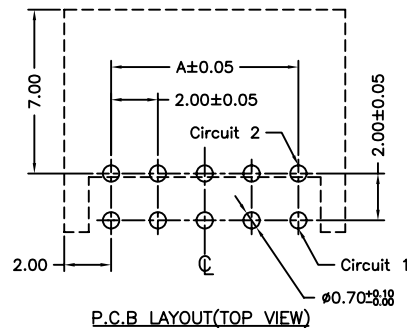
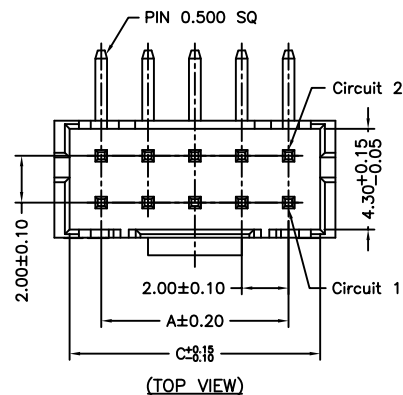


2X02~2X04P

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Circuit No.	Dimensions				
	A	B	C	D	E
2X02P	2.00	6.00	4.70	----	1.50
2X03P	4.00	8.00	6.70	----	3.00
2X04P	6.00	10.00	8.70	----	4.00
2X05P	8.00	12.00	10.70	6.00	4.00
2X06P	10.00	14.00	12.70	8.00	4.00
2X07P	12.00	16.00	14.70	10.00	5.00
2X08P	14.00	18.00	16.70	12.00	5.00
2X09P	16.00	20.00	18.70	14.00	5.00
2X10P	18.00	22.00	20.70	16.00	5.00
2X11P	20.00	24.00	22.70	18.00	5.00
2X12P	22.00	26.00	24.70	20.00	5.00
2X13P	24.00	28.00	26.70	22.00	5.00
2X14P	26.00	30.00	28.70	24.00	5.00
2X15P	28.00	32.00	30.70	26.00	5.00
2X16P	30.00	34.00	32.70	28.00	5.00
2X17P	32.00	36.00	34.70	30.00	5.00
2X18P	34.00	38.00	36.70	32.00	5.00
2X19P	36.00	40.00	38.70	34.00	5.00
2X20P	38.00	42.00	40.70	36.00	5.00
2X21P	40.00	44.00	42.70	38.00	5.00
2X22P	42.00	46.00	44.70	40.00	5.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ±

照片框

ORDER INFORMATION

PHDL1-R-xx-LF

SERIES | LEADFREE
 04~44WAY
 DIP 90°

DESCRIPTION: 2.00mm PITCH 90° WAFER