


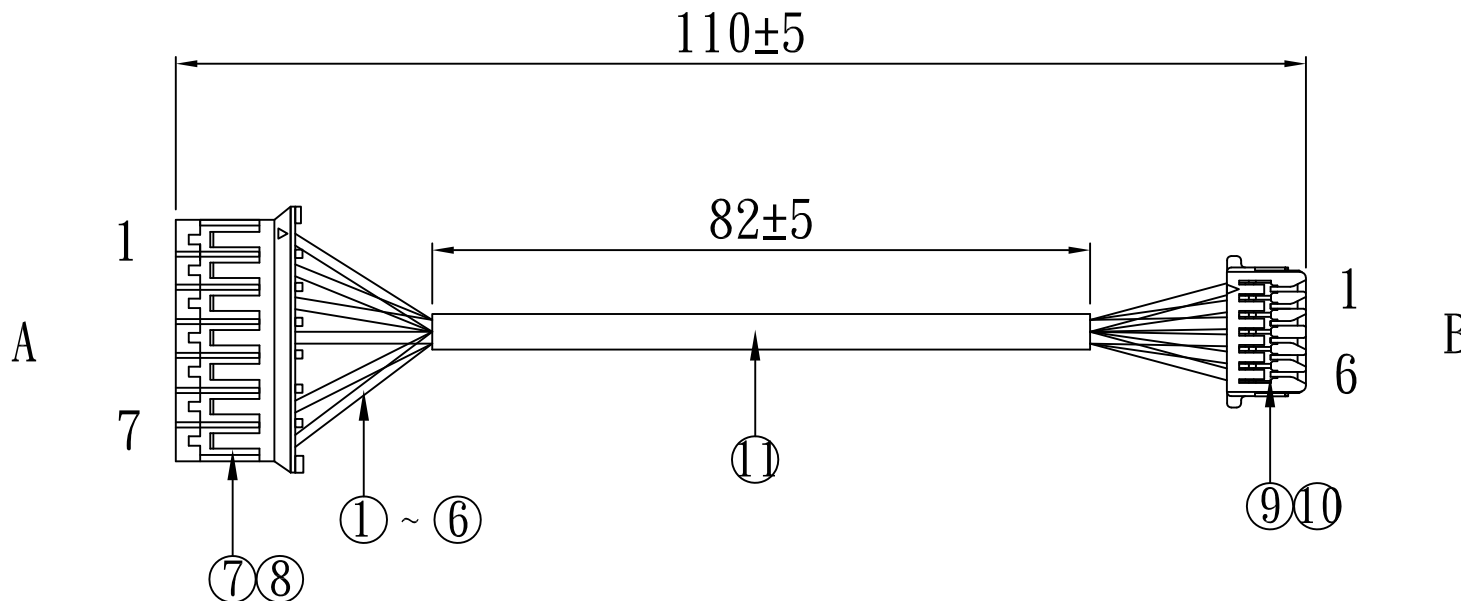

WIRING CHART

A	COLOR	B
1	BLACK	6
2	BROWN	5
3	RED	4
4	ORANGE	3
6	YELLOW	2
7	GREEN	1

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: $5\text{m}\Omega$
3. INSULATION RESISTANCE: $5\text{M}\Omega$ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL1571 #30 OD:0.55 BLACK	1PCS	E108485
2	WIRE:	UL1571 #30 OD:0.55 BROWN	1PCS	E108485
3	WIRE:	UL1571 #30 OD:0.55 RED	1PCS	E108485
4	WIRE:	UL1571 #30 OD:0.55 ORANGE	1PCS	E108485
5	WIRE:	UL1571 #30 OD:0.55 YELLOW	1PCS	E108485
6	WIRE:	UL1571 #30 OD:0.55 GREEN	1PCS	E108485
7	HOUSING:	PH-H-07	1PCS	E149293
8	TERMINAL:	PH-T-24	6PCS	
9	HOUSING:	SHL-H-06	1PCS	E179987
10	TERMINAL:	SHL-T-28	6PCS	
11	SHRINK TUBE:	3ϕ *82mm BLACK F34	1PCS	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

PHSHL-070630TB2-F11C-LF

SERIES

TUBE

30 AWG
07 TO 06 WAY

LEADFREE

110mm

FEMALE TO FEMALE

DESCRIPTION: CABLE ASS'Y