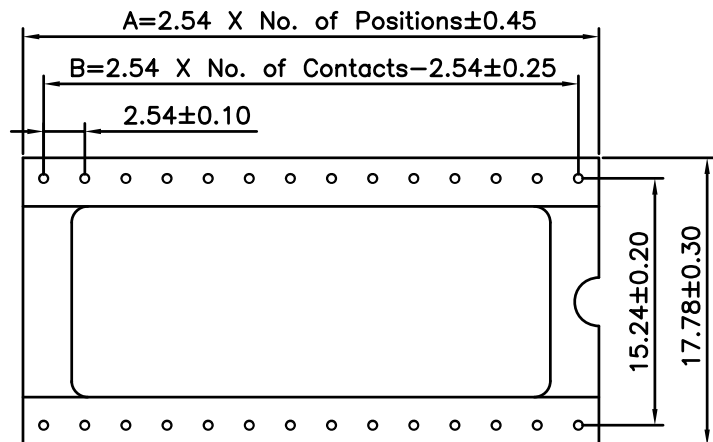


P.C.B LAYOUT

No.of positios	DIM"A"	DIM"B"
20	25.40	22.86
24	30.48	30.48
28	35.56	33.02
32	40.46	48.26

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated:2μm/80μ"Ni,Full gold

Insulator(black): Glass filled thermoplastic polyester
UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤4mΩ/contact

Insulation resistance: ≥1000MΩ at V=500V

Dielectric Withstanding Voltage: 1000V AC Min

Operaing voltage: 60VAC/DC

Mechanical:

Operaing temperatures: Gold Plated:-55° C to+125° C

Tin plated:-40° C to+105° C

Soldering temperature: +260° C,10s max.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.20
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ± 5°



ORDER INFORMATION

PIC-D06x09-xx-LF
SERIES | LEADFREE
20-32WAY
TOTAL LONG 9.30mm
DIP 180° G:GOLD PLATED
T:TIN PLATED
15.24mm

DESCRIPTION: 2.54mmPitch IC Adapters DIP XX Pins DIP Spacing 15.24mm Pin Length 9.3mm