


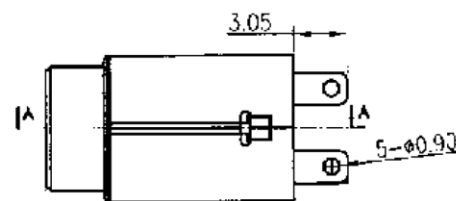
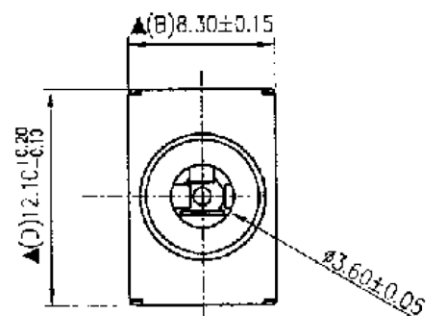



視圖 A(2:1)

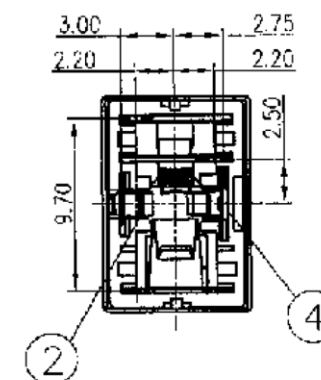

SECTION A-A

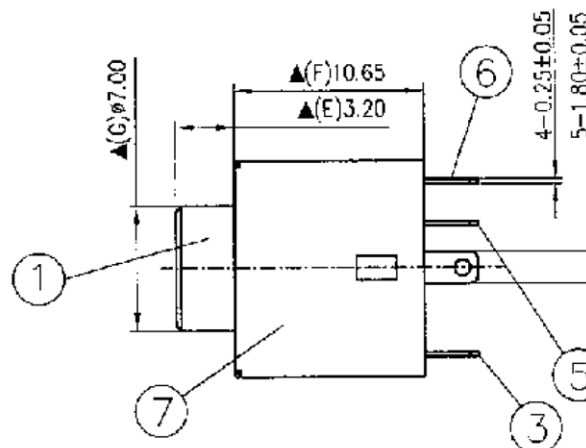

Pin Hole Layout
(Jack Bottom View)

SPECIFICATIONS:

Contact Resistance : $30m\Omega$ max
 Insulation Resistance : $100M\Omega$ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

7.	Metal Shell	0.20T steel nickel plated	1	
6.	CN(OPEN)# Terminal	0.25T Phosphor Copper	1	Silver Plated
5.	CO# Terminal	0.25T Phosphor Copper	1	Silver Plated
4.	Tip Spring	0.30T Phosphor Copper	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Copper	1	Silver Plated
2.	Earth Terminal	0.25T Phosphor Copper	1	Silver Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

PJ-D106-05C-LF
 SERIES | LEADFREE
 5P3C
 HIGH 10.65mm
 DIP 180°

DESCRIPTION: