

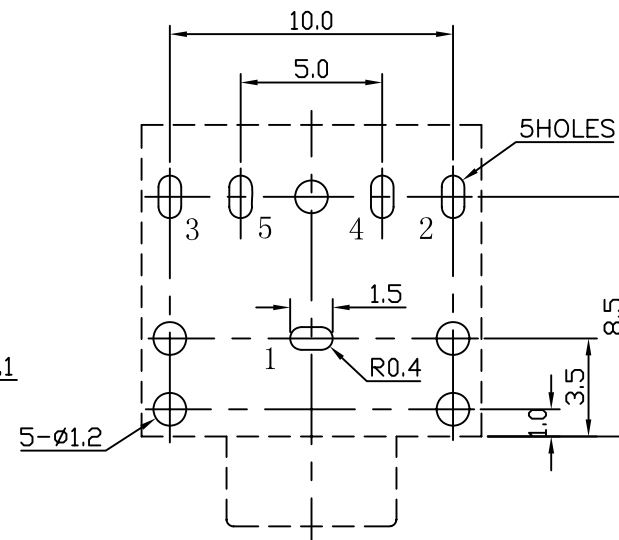
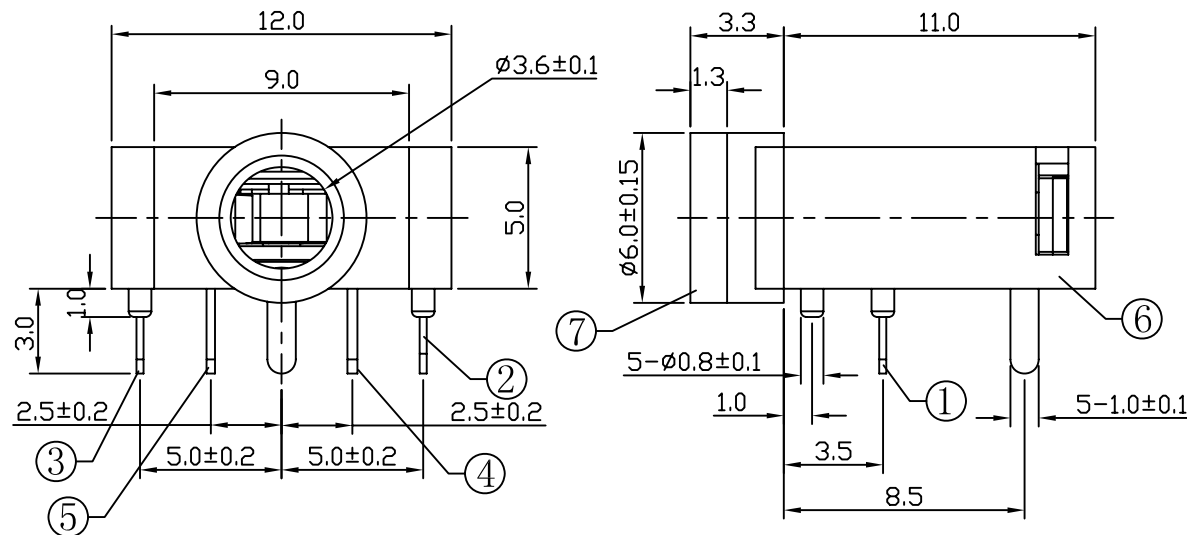




T:1.6 Dimensions of PC board holes

Tolerance :  $\pm 0.05$  (Printed-top view)

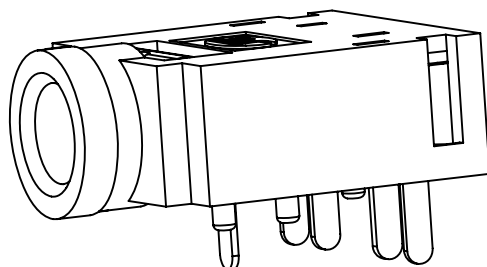

|     |              |     |                   |        |        |
|-----|--------------|-----|-------------------|--------|--------|
| 7   | AXIS SUPPORT | 1   | H59(COPPER ALLOY) | Ni     | PLATED |
| 6   | HOUSING      | 1   | PA66              |        | BLACK  |
| 5   | 5# TERMINAL  | 1   | C2680 t=0.30      | Ag     | PLATED |
| 4   | 4# TERMINAL  | 1   | C2680 t=0.35      | Ag     | PLATED |
| 3   | 3# TERMINAL  | 1   | C5191 t=0.25      | Ag     | PLATED |
| 2   | 2# TERMINAL  | 1   | C5191 t=0.30      | Ag     | PLATED |
| 1   | 1# TERMINAL  | 1   | C5191 t=0.25      | Ag     | PLATED |
| LTR | PART NAME    | QTY | MATERIAL          | REMARK |        |

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:  $\pm 0.3$

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X,  $\pm$   
.X  $\pm$  0.30  
.XX  $\pm$  0.20  
.XXX  $\pm$  0.10  
ANG  $\pm$  1°

PPOJECTION

照片框

ORDER INFORMATION

PJ-R125-05C-LF

SERIES LEADFREE  
5 PIN  
POST 1.0+2.5+5.0mm  
DIP 90°

DESCRIPTION: