

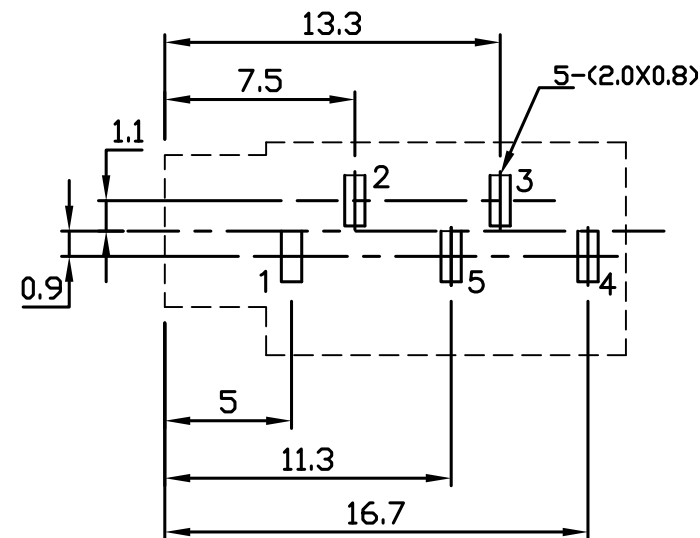


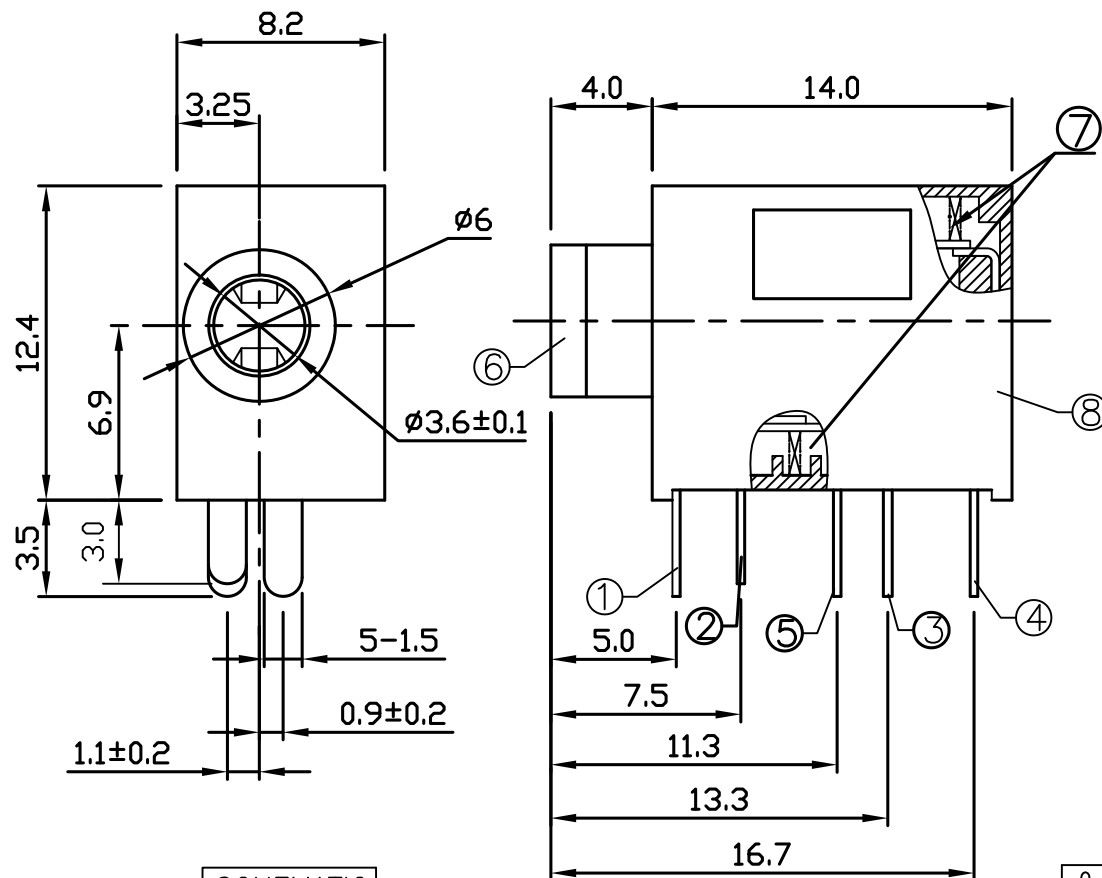

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)



UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

9	COVER	1	PBT 4815	UL-940
8	HOUSING	1	PBT 4815	UL-940
7	SPRING	1	SWC WIRE	
6	AXIS SUPPORT	1	H59	Cu/Sn PLATED
5	TERMINAL	1	C5191 t=0.30	Ag PLATED
4	TERMINAL	1	C2680 t=0.30	Ag PLATED
3	TERMINAL	1	C2680 t=0.30	Ag PLATED
2	TERMINAL	1	C2680 t=0.30	Ag PLATED
1	TERMINAL	1	C2680 t=0.30	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-R12M-05C-LF
SERIES T T T LEADFREE
5P3C
METAL
HIGH 12.4mm
DIP 90°

DESCRIPTION: MINIATURE JACK