
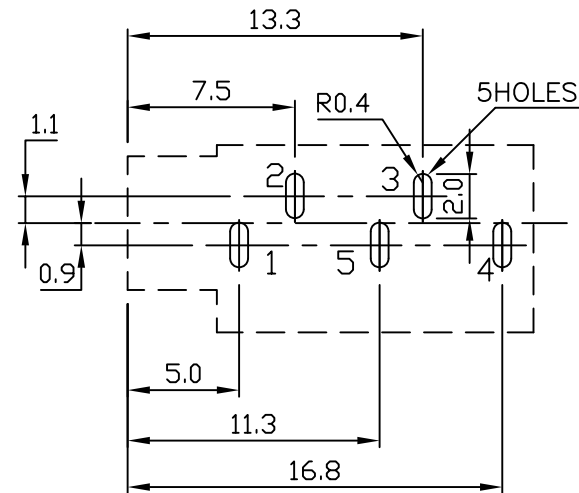


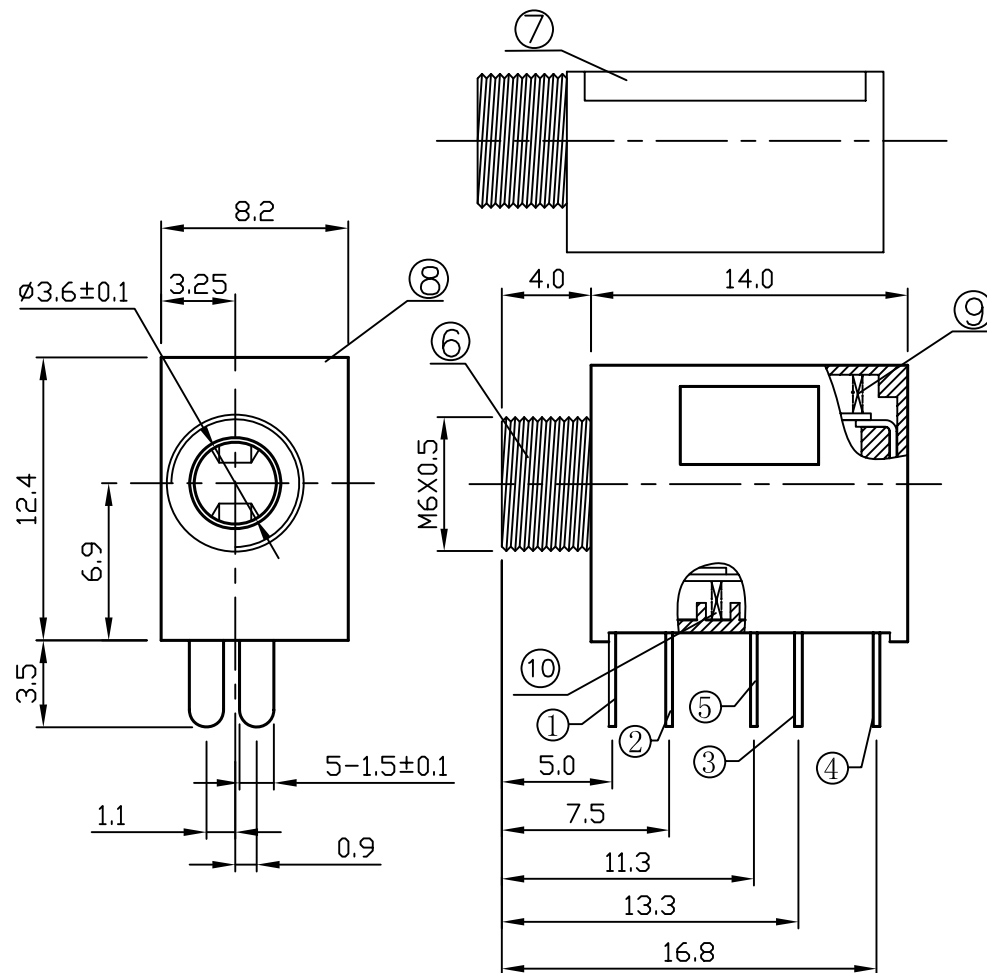

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

10	SPRING	1	SWC WIRE	
9	SPRING	1	SWC WIRE	
8	HOUSING	1	PBT 4815	UL-94V0(BLACK)
7	COVER	1	PBT 4815	UL-94V0(BLACK)
6	AXIS SUPPORT	1	H59(COPPER ALLOY)	MB:Cu Ni PLATED
5	CURVE PIECE	1	C2680 t=0.30	MB:Ni Ag PLATED
4	CURVE PIECE	1	C2680 t=0.30	MB:Ni Ag PLATED
3	SPRING PIECE	1	C5191 t=0.30	MB:Ni Ag PLATED
2	SPRING PIECE	1	C5191 t=0.30	MB:Ni Ag PLATED
1	FLAT PIECE	1	C2680 t=0.30	MB:Ni Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

SCHEMATIC				
PJ-R12T-05C	PJ-R12T-04R	PJ-R12T-04L	PJ-R12T-03	PJ-R12T-03B

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-R12T-xxx-LF
SERIES LEADFREE
SCHEMATIC
THREAD
FOOT 1.0+2.5mm
DIP 90°

DESCRIPTION: MINIATURE JACK