

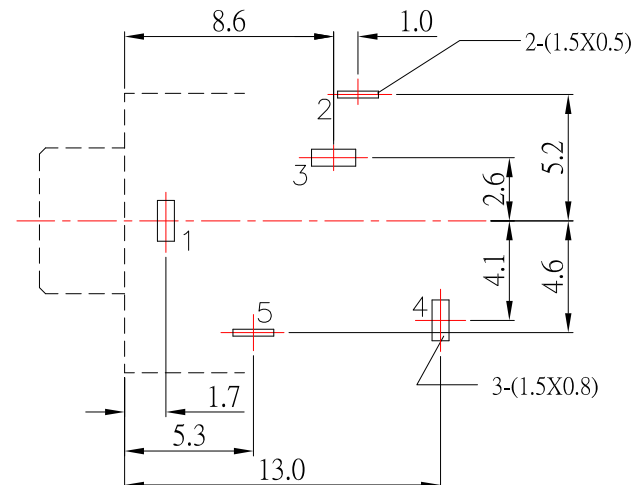
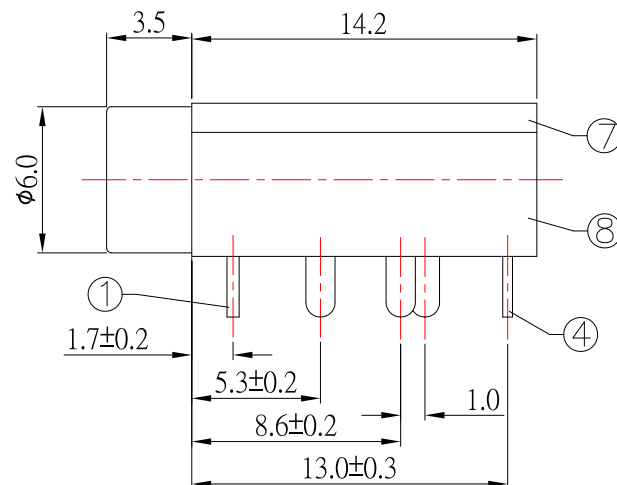


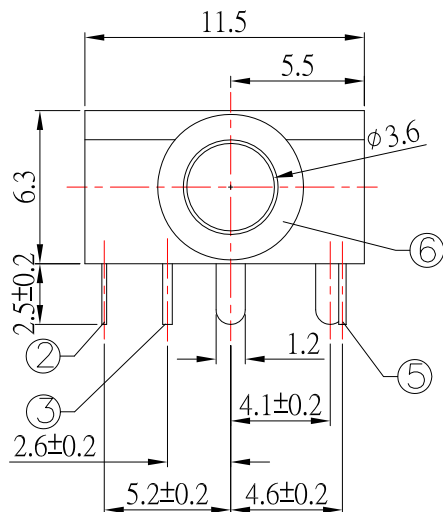


P.C.B LAYOUT
TOP VIEW

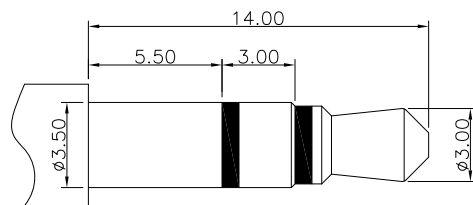

ø3.50mm 3 POLE PLUG

⑧	HOUSING	1	PBT	
⑦	COVER	1	PC	
⑥	AXIS SUPPORT	1	BRASS	Ni-Plating
⑤	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
④	4# CONTACT FOOT	1	BRASS	Sn-Plating
③	3# CONTACT FOOT	1	BRASS	Sn-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
①	1# CONTACT FOOT	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

PJ-R13M-05C-LF
SERIES LEADFREE
5P3C
METAL
FOOT 1.7+3.6mm
DIP 90°

DESCRIPTION: JACK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°