

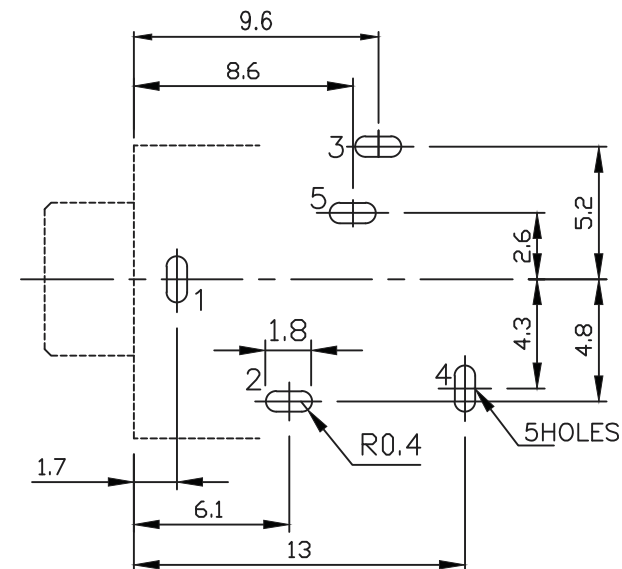
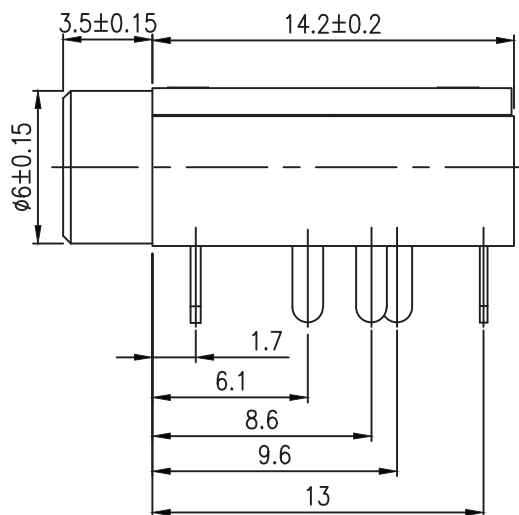


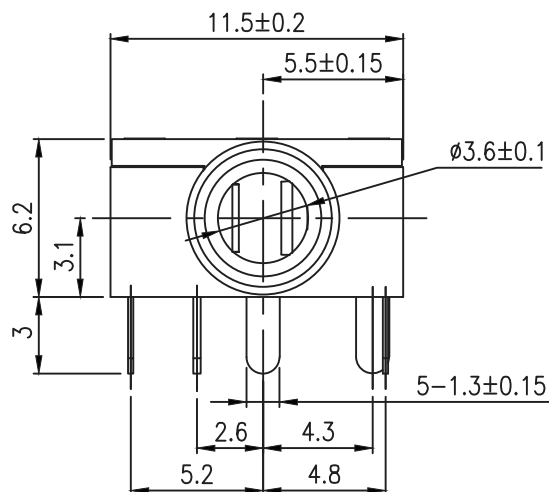

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

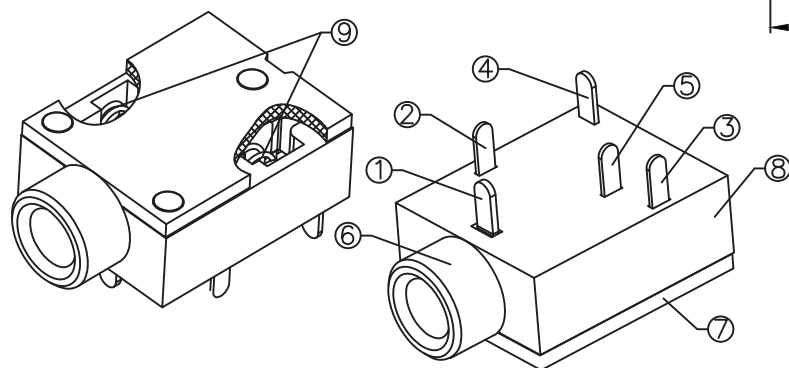

9	SPRING	2	SWC	Ni PLATED
8	HOUSING	1	PBT 4815	UL-94V0
7	COVER	1	PC	
6	AXIS SUPPORT	1	H59(COPPER ALLOY)	Ni PLATED
5	SHUNT TERMINAL	1	C2680 t=0.35	Sn PLATED
4	SHUNT TERMINAL	1	C2680 t=0.35	Sn PLATED
3	RING SPRING	1	C5191 t=0.25	Sn PLATED
2	TIP SPRING	1	C5191 t=0.25	Sn PLATED
1	EARTH TERMINAL	1	C2680 t=0.45	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

SCHEMATIC				
PJ-R14M-05C	PJ-R14M-04CR	PJ-R14M-04CL	PJ-R14M-03	PJ-R14M-03B

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-R14M-xx-LF
SERIES T T T LEADFREE
SCHEMATIC
METAL
FOOT 1.7+4.4mm
DIP 90°

DESCRIPTION: MINIATURE JACK