


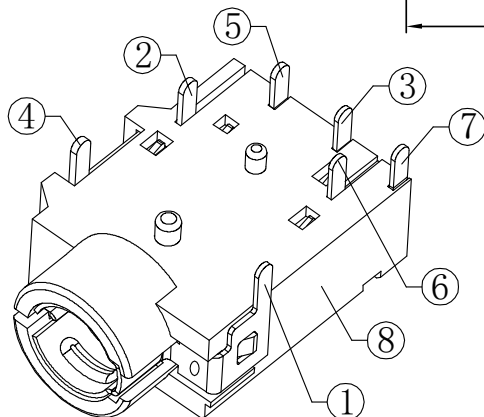
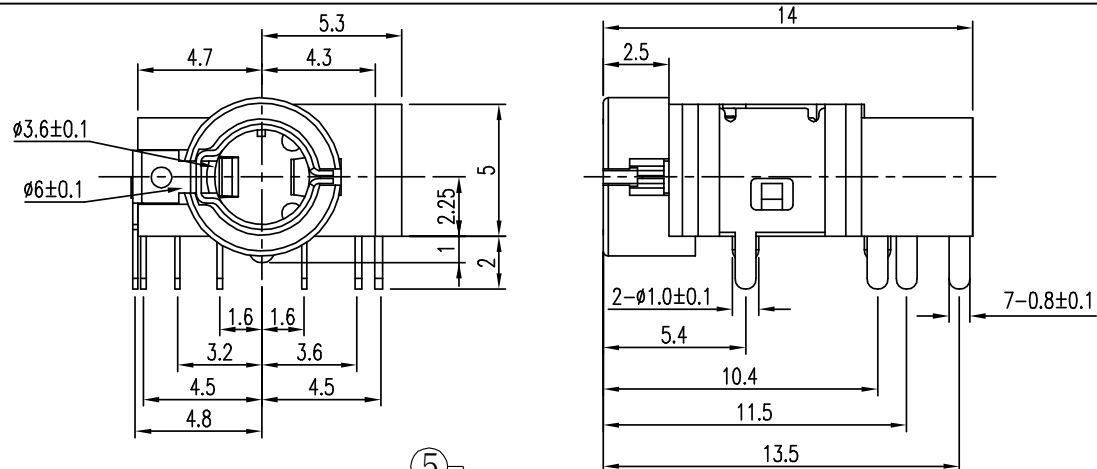


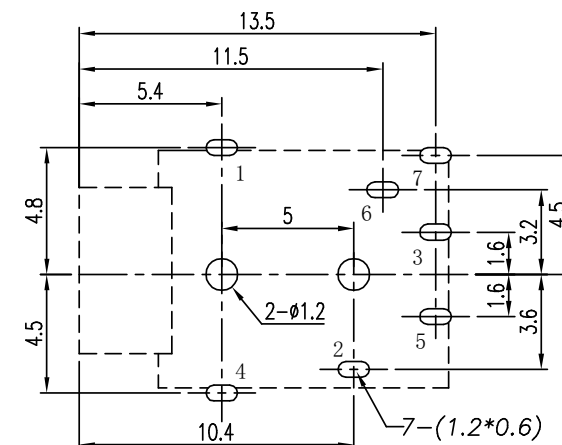

REFERENCE SCHEMATIC

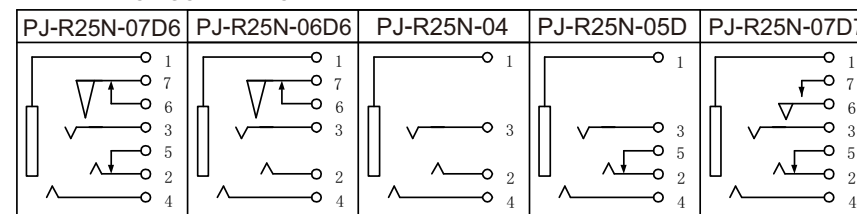

T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

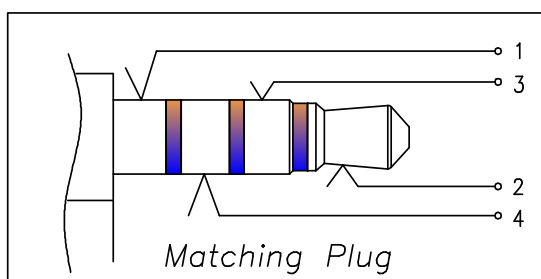

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

8	HOUSING	1	PA66		BLACK
7	TRANSFER TERMINAL	1	C5191	t=0.20	Ag PLATED
6	BREAK TERMINAL	1	C2680	t=0.20	Ag PLATED
5	SHUNT TERMINAL	1	C2680	t=0.25	Ag PLATED
4	RING SPRING	1	C5191	t=0.30	Ag PLATED
3	RING SPRING	1	C5191	t=0.20	Ag PLATED
2	TIP SPRING	1	C5191	t=0.25	Ag PLATED
1	EARTH SPRING	1	C5191	t=0.20	Au PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PJ-R25N-xxx-LF
SERIES LEADFREE
REFERENCE SCHEMATIC
INNER SIDE METAL BUSHING
FOOTPRINT 2.5mm
DIP 90°

DESCRIPTION: MINIATURE JACK