


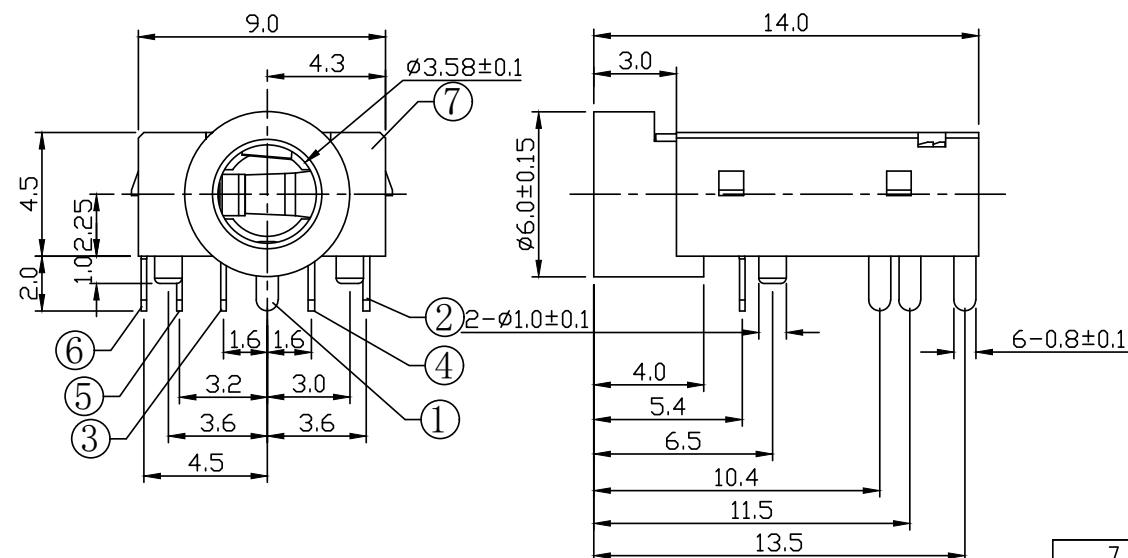

Technical drawing of a rectangular plate with dimensions and hole specifications. The overall dimensions are 13.5 (width) and 4.5 (height). The plate features six holes, labeled 1 through 6, with a total of 6 HOLES. The holes are arranged in a 2x3 grid. The dimensions for the holes and their positions are as follows:

- Hole 1: Diameter $\phi 1.1$, located at a horizontal distance of 6.5 from the left edge and a vertical distance of 3.0 from the bottom edge.
- Hole 2: Diameter $\phi 1.1$, located at a horizontal distance of 10.4 from the left edge and a vertical distance of 3.6 from the bottom edge.
- Hole 3: Diameter $\phi 1.1$, located at a horizontal distance of 11.5 from the left edge and a vertical distance of 3.2 from the bottom edge.
- Hole 4: Diameter $\phi 1.1$, located at a horizontal distance of 11.5 from the left edge and a vertical distance of 3.6 from the bottom edge.
- Hole 5: Diameter $\phi 1.1$, located at a horizontal distance of 11.5 from the left edge and a vertical distance of 3.2 from the bottom edge.
- Hole 6: Diameter $\phi 1.1$, located at a horizontal distance of 11.5 from the left edge and a vertical distance of 3.6 from the bottom edge.

The plate has a thickness of 1.2 and a fillet radius of R0.4. The dimensions are given in millimeters (mm).

SCHEMATIC	
PJ-R30SXcc-06C6	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

照片框

PJ-R30SXcc-06C6-LF

SERIES DIP 90° POST 3.5mm NO SPRING BLANK:BLACK
GR:GREEN
PK:PINK
BL:BLUE
OR:ORANGE 6P3C6 LEADFREE

DESCRIPTION: MINIATURE JACK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE _____

SIZE A4

PROJECTION 

TOLERANCES ARE

 $X_{\pm}$ $\cdot X_{\pm}$
$$\frac{XX \pm}{YY}$$

ANG +

AND =

ON