
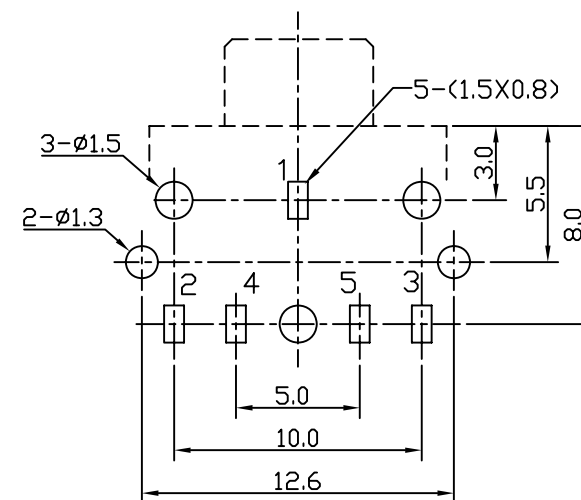
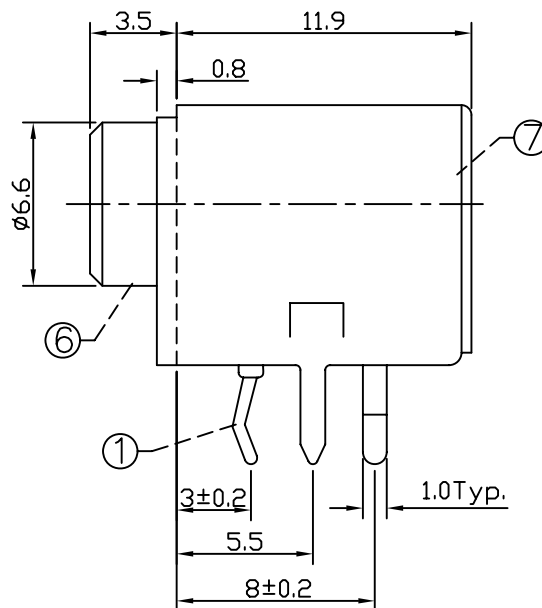


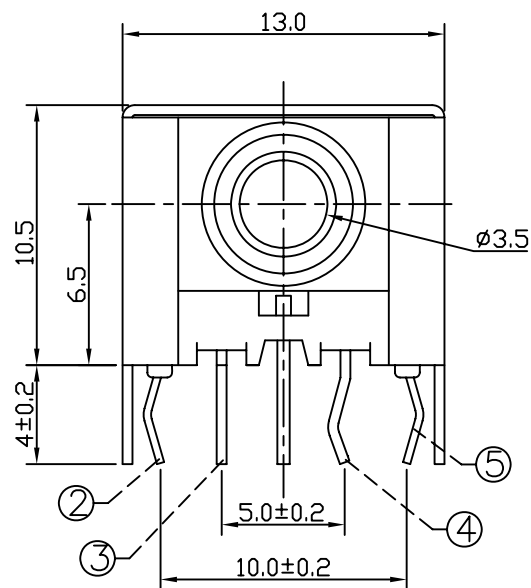

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

SCHEMATIC

PJ-R34M-05C	PJ-R34M-04CR	PJ-R34M-04CL	PJ-R34M-03	PJ-R34M-03B

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

7	COAT	1	SPCC	MB:Cu Ni PLATED
6	HOUSING	1	PBT 4815	UL-94V0(BLACK)
5	5# CONTACT FOOT	1	C5191	MB:Cu Sn PLATED
4	4# CONTACT FOOT	1	C2680	MB:Cu Sn PLATED
3	3# CONTACT FOOT	1	C2680	MB:Cu Sn PLATED
2	2# CONTACT FOOT	1	C5191	MB:Cu Sn PLATED
1	1# CONTACT FOOT	1	C2680	MB:Cu Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PJ-R34M-xxx-LF
SERIES | LEADFREE
METAL | SCHEMATIC
3.0+5.0mm
DIP 90°

DESCRIPTION: MINIATURE JACK