



T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

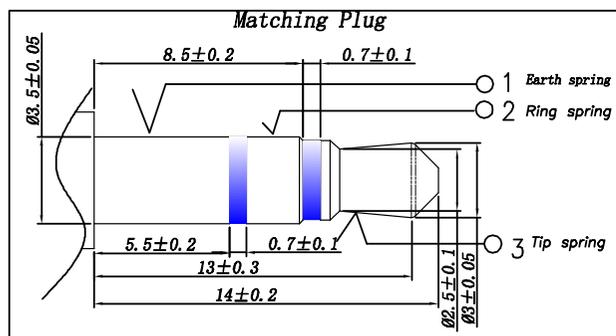

10	SWITCH SPRING	1	SWC	
9	CONTACT CRIP	1	Alloy	t=0.045
8	SWITCH KNOB	1	PA66	UL-94V0(BLACK)
7	SWITCH HOUSING	1	PBT	UL-94V0(BLACK)
6	SWITCH COVER	1	PA66	UL-94V0(BLACK)
5	HOUSING	1	PA66	UL-94V0(BLACK)
4	6# CONTACT FOOT	3	C2680	t=0.35 Ag PLATED
3	3# CONTACT FOOT	1	C5191	t=0.25 Sn PLATED
2	2# CONTACT FOOT	1	Stainless Steel	t=0.25 Ag PLATED
1	1# CONTACT FOOT	1	C5191	t=0.50 Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±


SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

PJ-R34SW31-03-LF

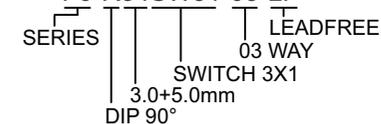

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MINIATURE JACK