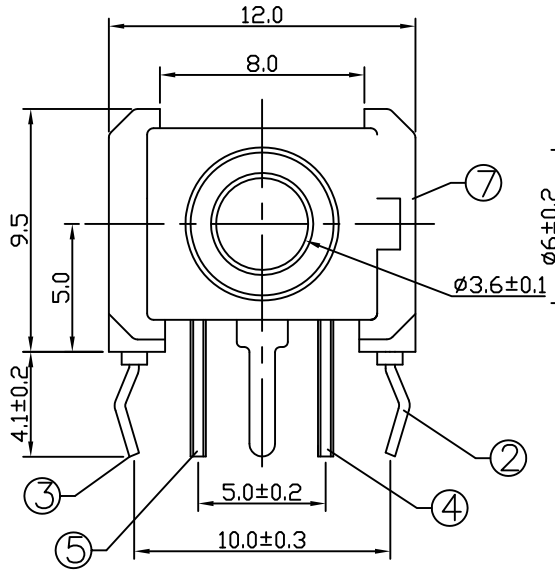

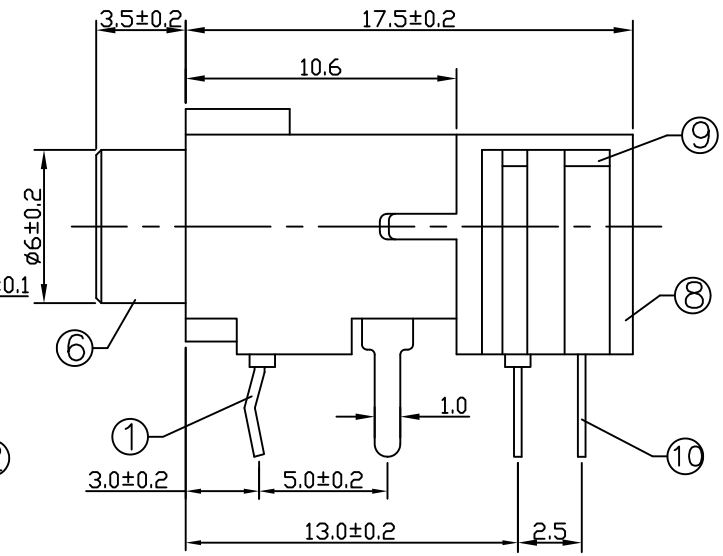

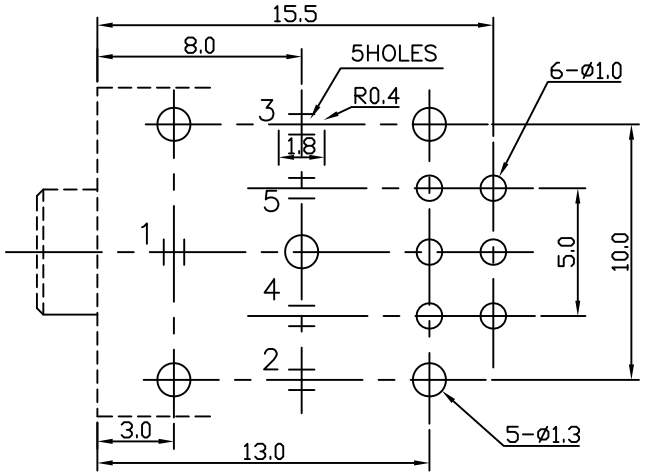

T:1.6 Dimensions of PC board holes

Tolerance : ±0.1(Printed-top view)

SCHEMATIC					
PJ-R35SW-05C	PJ-R35SW-04C	PJ-R35SW-04	PJ-R35SW-03	PJ-R35SW-03B	PJ-R35SW-02
					

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

LTR	PART NAME	QTY	MATERIAL		REMARK
10	8# CONTACT FOOT	6	C2680		MB:Cu Ag PLATED
9	SWITCH COVER	1	PA66		
8	SWITCH	1	PBT 4815		
7	HOUSING	1	PA66		
6	AXIS SUPPORT	1	C2680		MB:Cu Ni PLATED
5	5# SHUNT TERMINAL	1	C2680	t=0.40	MB:Cu Sn PLATED
4	4# SHUNT TERMINAL	1	C2680	t=0.40	MB:Cu Sn PLATED
3	3# RING SPRING	1	C5191	t=0.25	MB:Cu Sn PLATED
2	2# TIP SPRING	1	SUS301	t=0.25	MB:Cu Ag PLATED
1	1# EARTH TERMINAL	1	C2680	t=0.50	MB:Cu Sn PLATED

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

PJ-R35SW-xxx-LF

- SERIES
- DIP 90°
- 3.0+5.0mm
- SWITCH
- SCHEMATIC
- LEADFREE

DESCRIPTION: MINIATURE JACK