

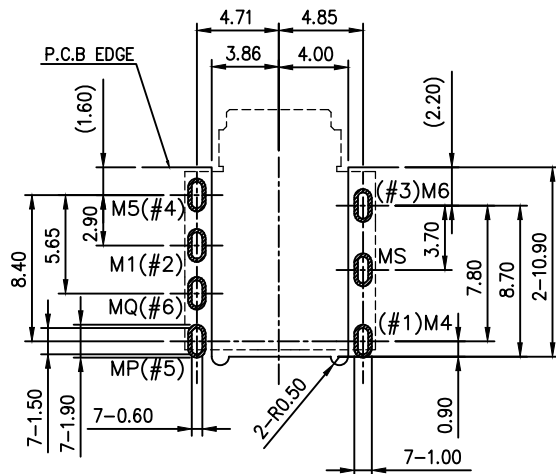


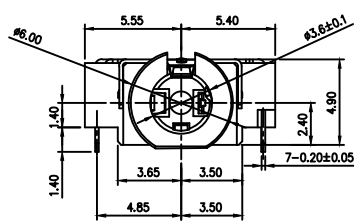
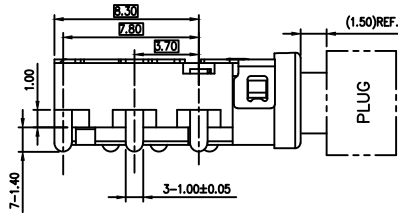


DATE CODE
JC: 公司 MARK
YY: YEAR
WW: WEEK



RECOMMENDED PADS LAYOUT
<TOP VIEW>

NOTE : TOLERANCE FOR PCB LAYOUT IS ± 0.05

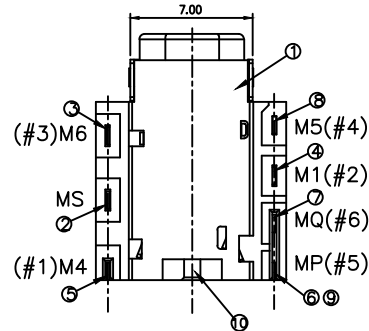

⑩	DUMMY PIN	STAINLESS STEEL	—	1	0.15t
⑨	SEPARATOR	HIGH TEMP PLASTIC	UL94V-0	1	BLACK
⑧	M5_CONTACT	COPPER ALLOY	MB:Ni Au PLATED	1	0.2t
⑦	MQ_SHUNT	COPPER ALLOY	MB:Ni Au PLATED	1	0.2t
⑥	MP_CONTACT	COPPER ALLOY	MB:Ni Au PLATED	1	0.2t
⑤	M4_CONTACT	COPPER ALLOY	MB:Ni Au PLATED	1	0.2t
④	M1_CONTACT	COPPER ALLOY	MB:Ni Au PLATED	1	0.2t
③	M6_CONTACT	COPPER ALLOY	MB:Ni Au PLATED	1	0.2t
②	MS_SHELL	COPPER ALLOY	Ni 50u"MIN	1	0.2t
①	P1_HOUSING	HIGH TEMP PLASTIC	UL94V-0	1	BLACK
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PJ-RF12239-06D-LF

SERIES
LEADFREE
6P4C
HIGH 3.9mm
1.6+2.9+2.75mm
OFFSET
DIP 90°

DESCRIPTION: 3.5 ϕ mm EARPHONE JACK