

10.95


10.25

15.55^{+0.1}

YYWW




DATE CODE
YY:YEAR
WW:WEEK

DATE CODE
YY:YEAR
WW:WEEK





SCHMATIC

M6(#3)G/M
M4(#1)L/R
MP(#5)
MQ(#6)
M1(#2)R/L
M5(#4)M/O

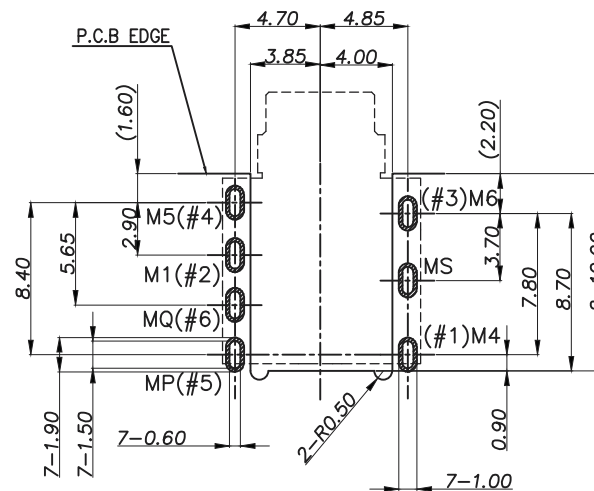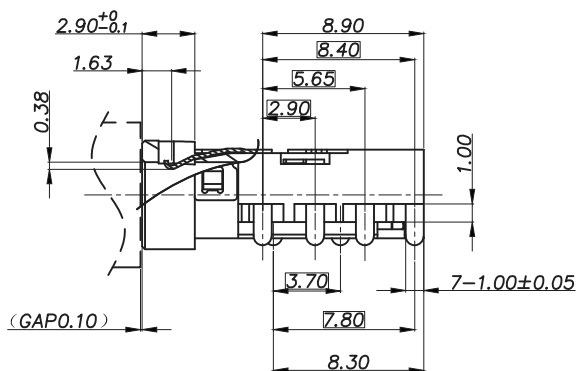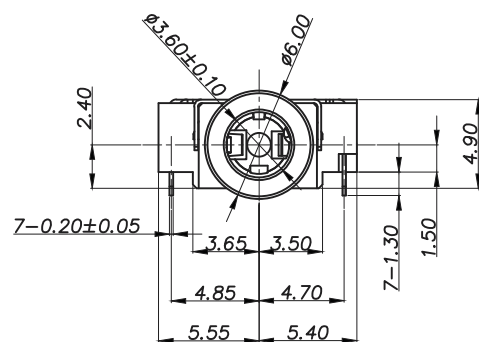

RECOMMENDED PADS LAYOUT
<TOP VIEW>

NOTE : TOLERANCE FOR PCB LAYOUT IS ± 0.05

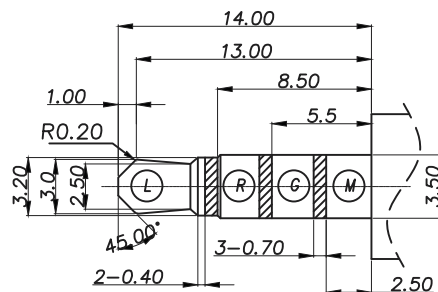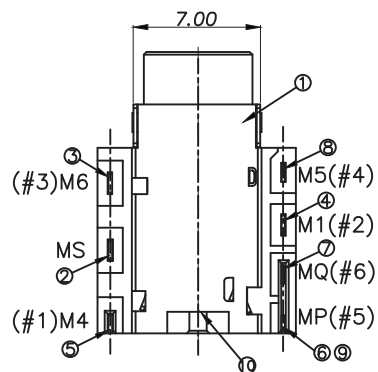

10	DUMMY PIN	SUS304	—	1	0.15t
9	SEPARATOR	PA9T	UL94V-0	1	BLACK
8	M5_CONTACT	C5210R-EH	Overall nickel plating 50u' MIN , CONTACT AREA GOLD FLASH.	1	0.2t
7	MQ_SHUNT	C5210R-EH		1	0.2t
6	MP_CONTACT	C5210R-EH		1	0.2t
5	M4_CONTACT	C5210R-EH		1	0.2t
4	M1_CONTACT	C5210R-EH		1	0.2t
3	M6_CONTACT	C5210R-EH		1	0.2t
2	MS_SHELL	C5210R-EH	Ni 50u"MIN	1	0.2t
1	P1_HOUSING	PA9T	UL94V-0	1	BLACK
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

 $X_{\pm}$

CHECKED BY GENIUS

$$\frac{X_{\pm}}{Y_{\pm}}$$

UNIT / mm

$$.XXX \pm$$

DATE _____

ANG ±

SIZE A4

PJECTION 

照片框

ORDER INFORMATION

PJ-RF12240-06D-LF

SERIES
LEADFREE
6P4C
HIGH 4.0mm
1.6+2.9+2.75mm
OFFSET
DIP 90°

DESCRIPTION: 3.5mm EARPHONE JACK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com