
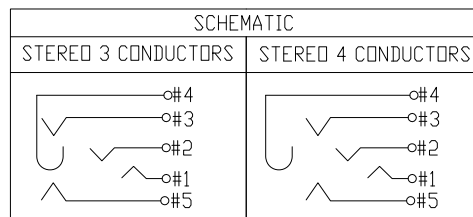




Plastic Model Number

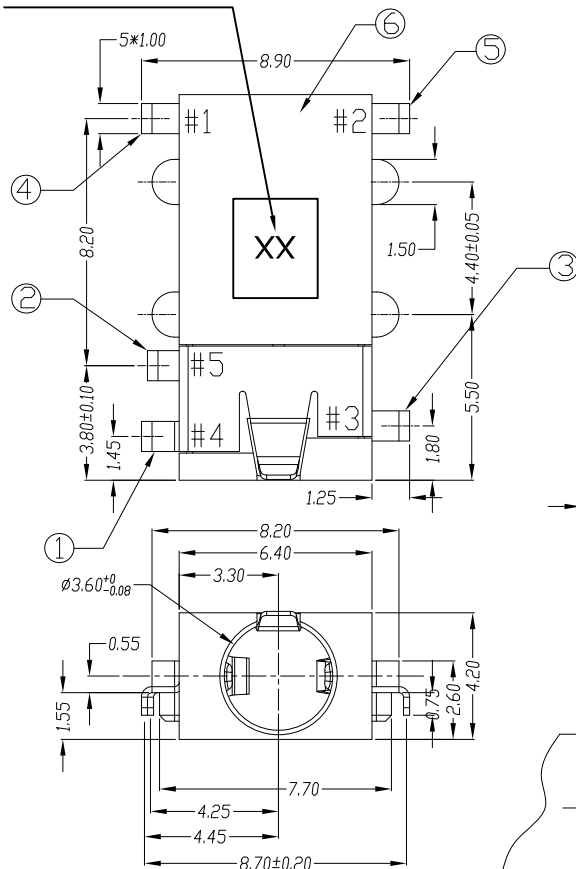

Specification:

Contact Resistance: 30m Ohm. Max.
Insulation Resistance: 100M Ohm Min. At 500V DC.
Rated Voltage And Current: DC 12V,1A Max ; AC 100V,1A Max.
Dielectric Withstanding Voltage: 500V AC For 1 Minute.
Durability (Life Test Front): 5000 cyces at 500 cycles per hour;
Insertion Force: 0.3~3.0 Kg.
Extraction Force: 0.3~3.0Kg.

NO	NAME	MATERIAL	FINISH	Q'TY
1	PIN1	PHOS.BRONZE(EH) 0.20mm	SILVER PLATED	1
2	PIN2	PHOS.BRONZE(EH) 0.20mm	SILVER PLATED	1
3	PIN3	PHOS.BRONZE(EH) 0.20mm	SILVER PLATED	1
4	PIN4	PHOS.BRONZE(H) 0.20mm	SILVER PLATED	1
5	PIN5	PHOS.BRONZE(H) 0.20mm	SILVER PLATED	1
6	HOUSING	PA9T G.F.	SEE COLOR	1

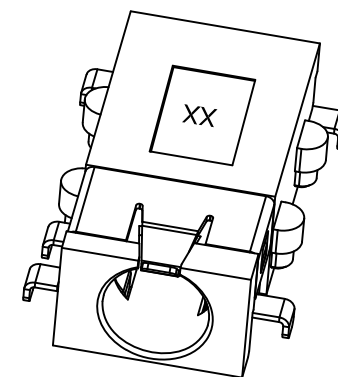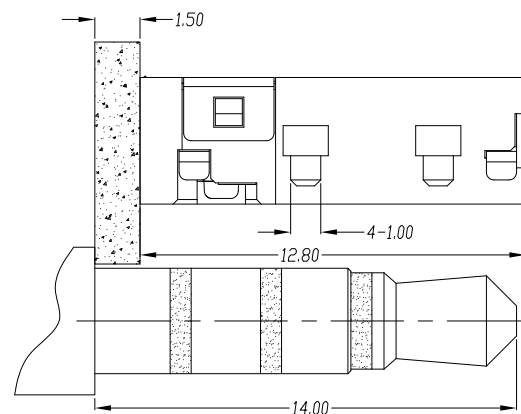

MODEL NO.	PJ-RH26B0-05D (PC99 COLOR)					
	A	B	C	D	E	F
HOUSING	PINK	BLACK	LIME	YELLOW	ORANGE	LIGHT BLUE
PANTONE	701C		577C	123C	157C	284C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

P PROJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

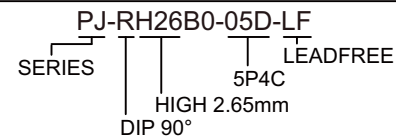

DESCRIPTION: ∅3.5 EARPHONE JACK FLAT 5 PIN DIP

煜倫股份有限公司

www.morethanall.com