
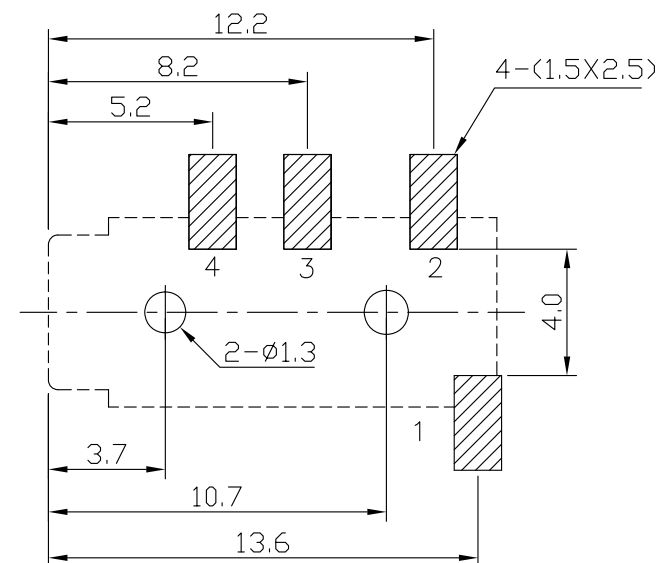
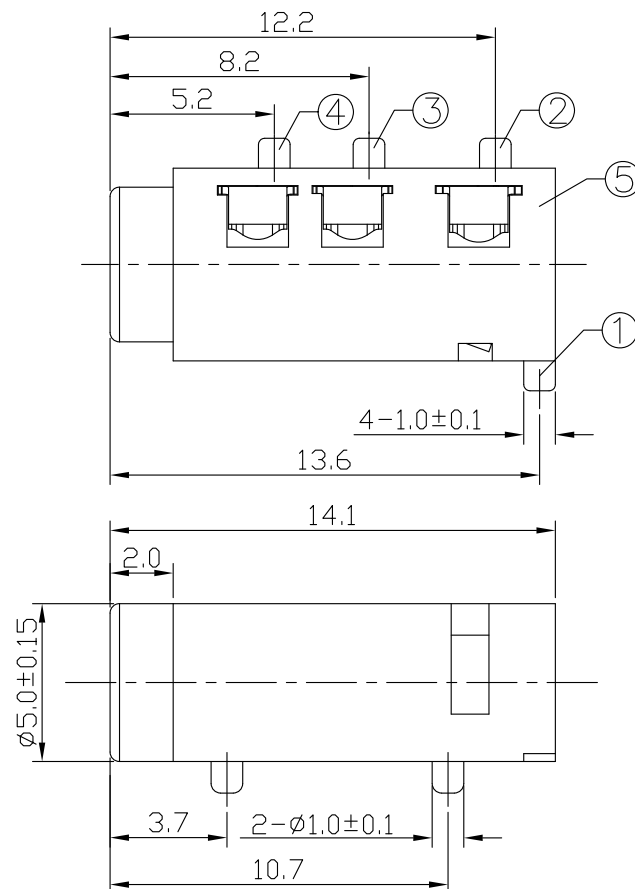


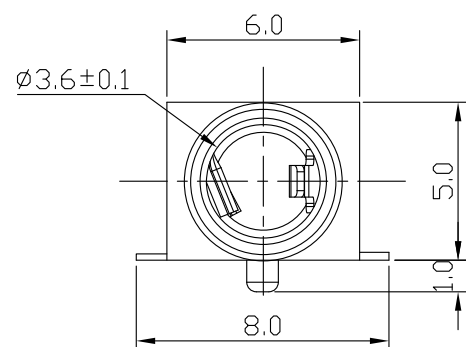

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

SCHEMATIC
PJ-W17B20R-04

5	HOUSING	1	PA9T	UL-94V0(BLACK)		
4	4# CONTACT FOOT	1	C5191	t=0.25	MB:Ni	Ag PLATED
3	3# CONTACT FOOT	1	C5191	t=0.25	MB:Ni	Ag PLATED
2	2# CONTACT FOOT	1	C5191	t=0.25	MB:Ni	Ag PLATED
1	1# CONTACT FOOT	1	C5191	t=0.25	MB:Ni	Ag PLATED
LTR	PART NAME	QTY	MATERIAL		REMARK	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

1 Space=1 pcs

1 Film packing box=1×900pcs
=900pcs

1 Big Carton=13×900pcs=11700pcs

1 Film packing box Dimension
=L×W×H
=11400×24×6.9

The thickness of the film=0.35mm


1 Embossed Carrier Reel Dimension
=D×H
=330×29.1

1 Cover tape Dimension
=L×W×H
=11400×21.3×0.06

1 Plastic Bag Dimension
=L×W×D
=1000×1100×0.06

1 Big Carto Dimension
=L×W×H
=400×350×340

Unit:mm

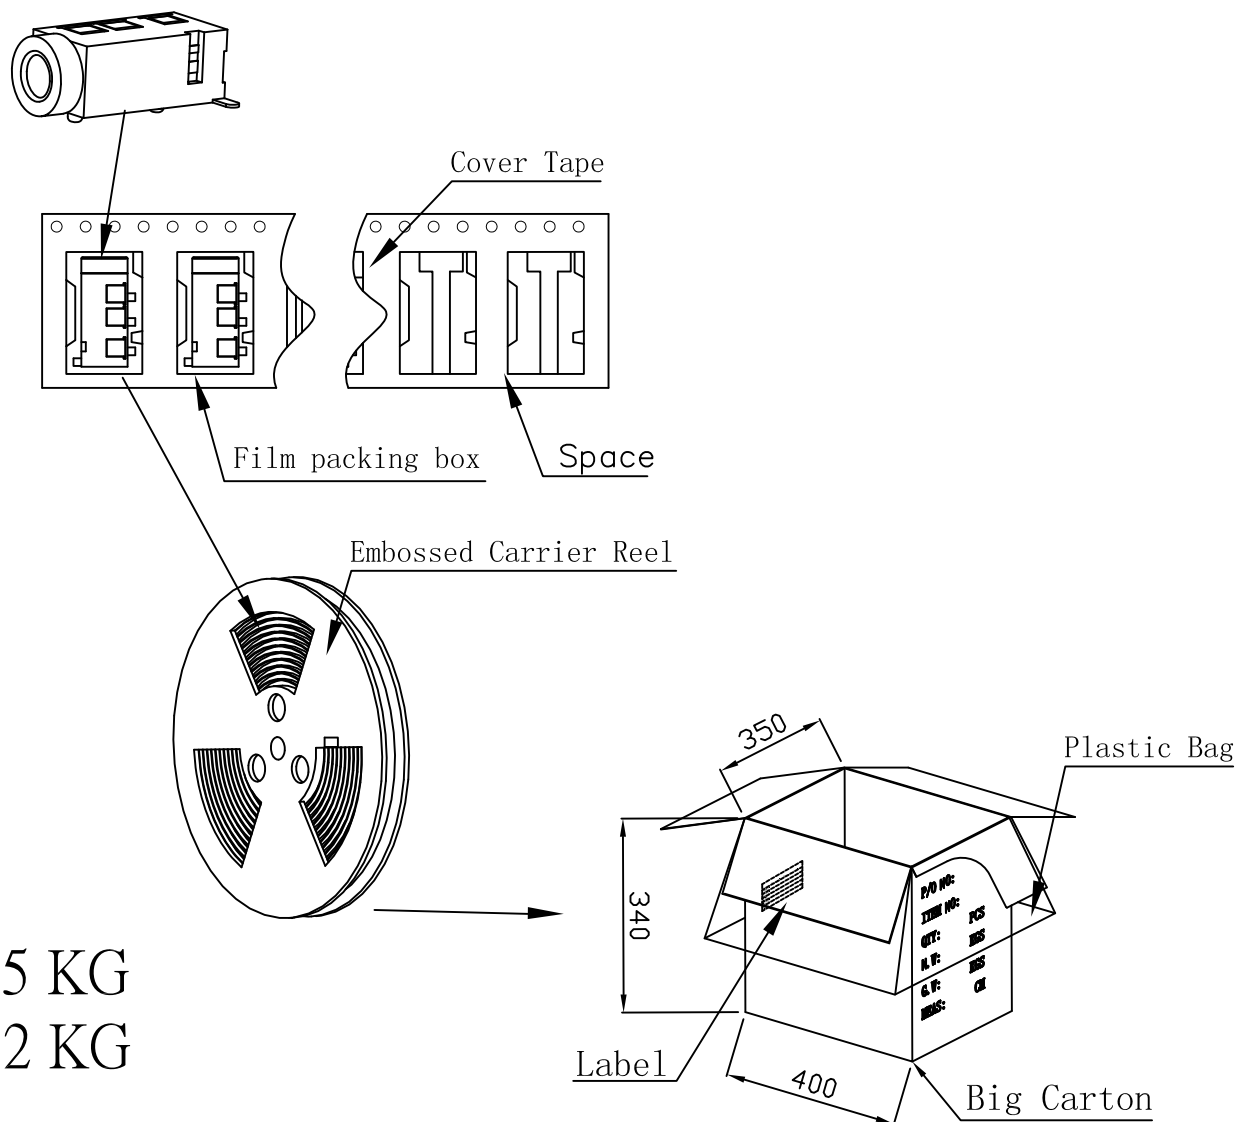

淨重: 6.5 KG
毛重: 12 KG

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

PJ-W17B20R-04-LF
SERIES | REEL | LEADFREE
90°SMT | BUSHING 2.0mm | 04 WAY
POST 1.7+7.0mm

DESCRIPTION: MINIATURE JACK