

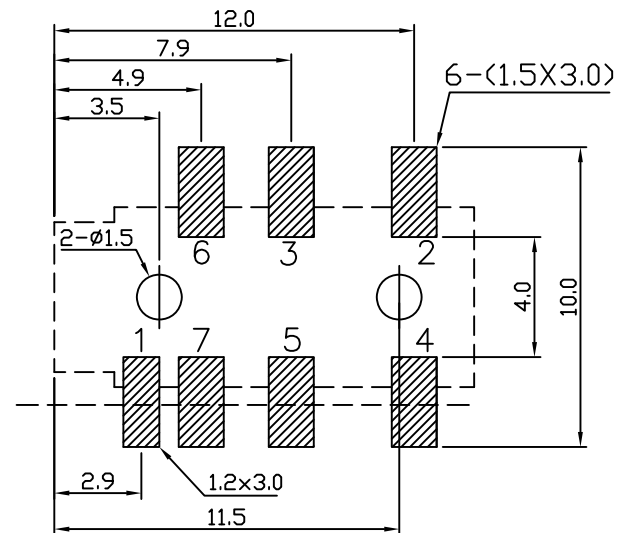
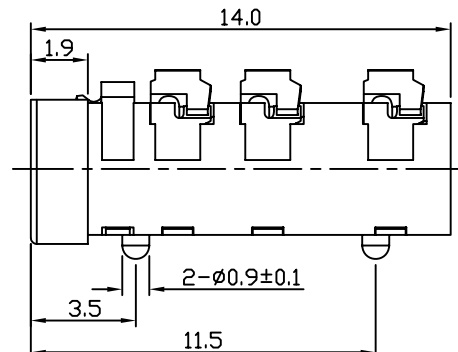
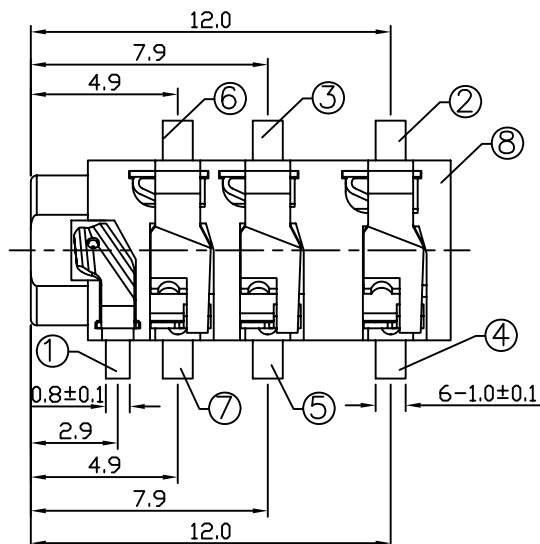
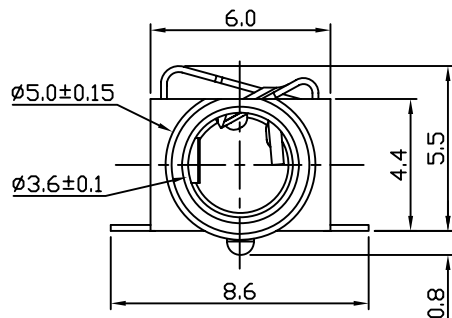


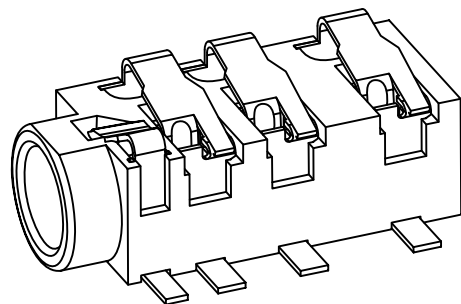

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)



UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

8	HOUSING	1	PA9T		UL-94V0(BLACK)
7	CURVE PIECE	1	C2680	t=0.20	Ag PLATED
6	SPRING FOOT	1	C5191	t=0.20	Ag PLATED
5	CURVE PIECE	1	C2680	t=0.20	Ag PLATED
4	CURVE PIECE	1	C2680	t=0.20	Ag PLATED
3	SPRING FOOT	1	C5191	t=0.20	Ag PLATED
2	SPRING FOOT	1	C5191	t=0.20	Ag PLATED
1	CONTACT FOOT	1	C5191	t=0.20	Ag PLATED
LTR	PART NAME	QTY	MATERIAL		REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-W18-07D-LF
SERIES | POST 1.6+8.0mm
LEADFREE
7P4C
90°SMT

DESCRIPTION: MINIATURE JACK