

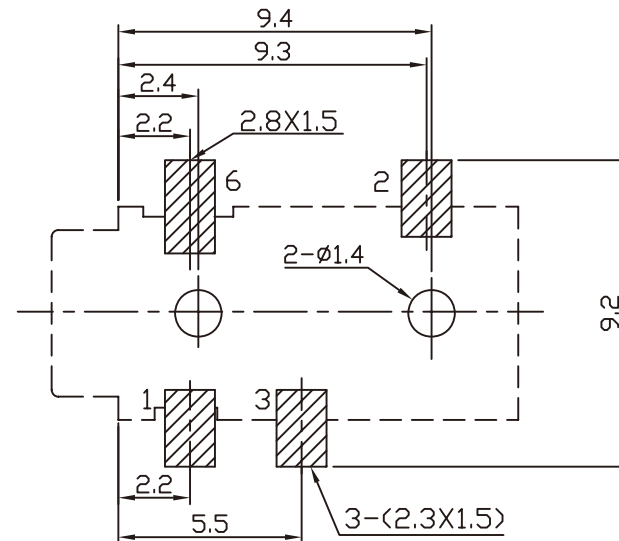
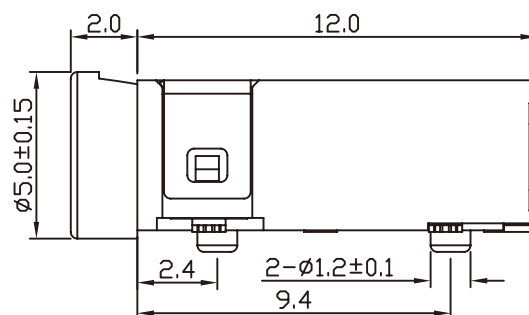
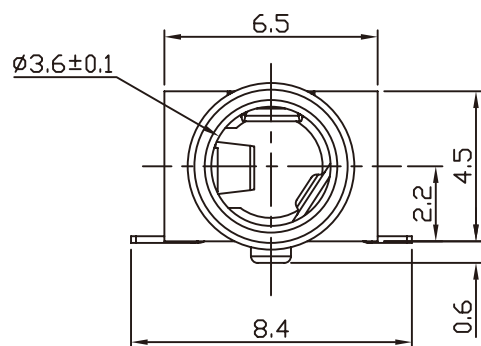
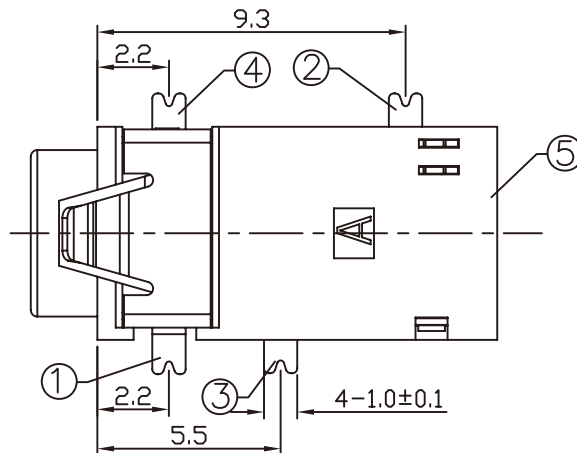


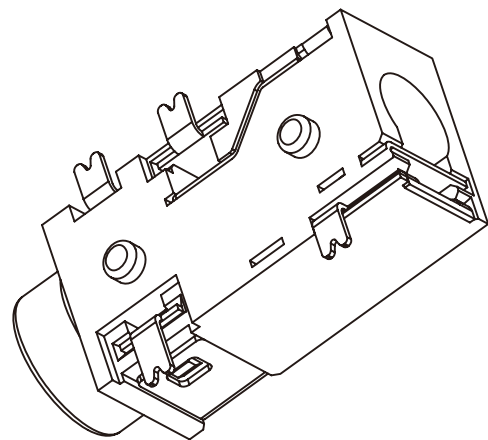

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)



5	HOUSING	1	PA9T		UL-94V0(BLACK)
4	CONTACT FOOT	1	C2680	t=0.20	MB:Ni Ag PLATED
3	SPRING FOOT	1	C5191	t=0.20	MB:Ni Ag PLATED
2	SPRING FOOT	1	C5191	t=0.20	MB:Ni Ag PLATED
1	CONTACT FOOT	1	C5191	t=0.20	MB:Ni Ag PLATED
LTR	PART NAME	QTY	MATERIAL		REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-W27B2-04-LF

SERIES | LEADFREE
4 WAY
BUSHING 2.0mm
POST 2.4+7mm
90°SMT

DESCRIPTION: MINIATURE JACK