

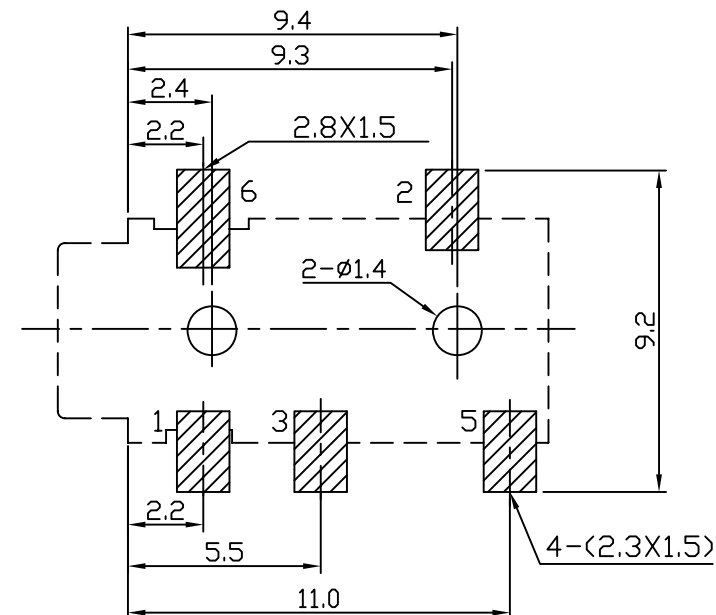
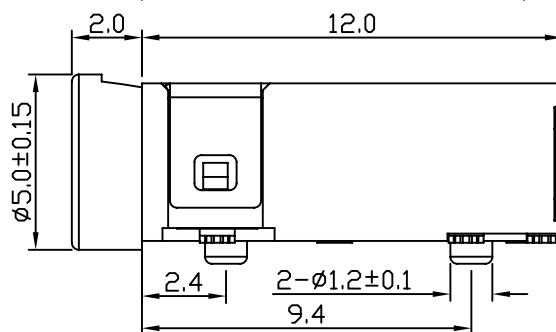
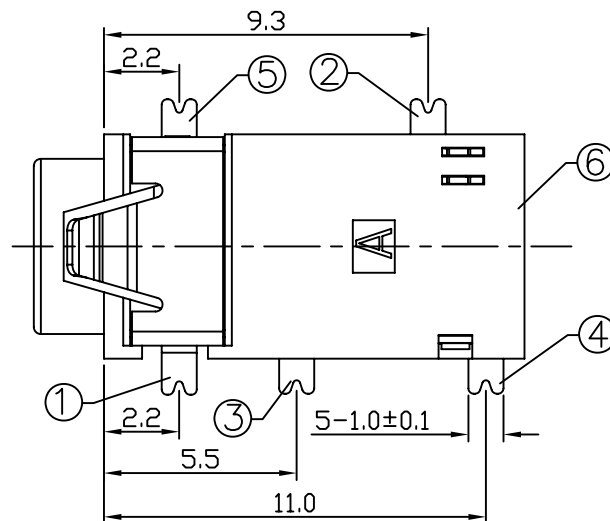
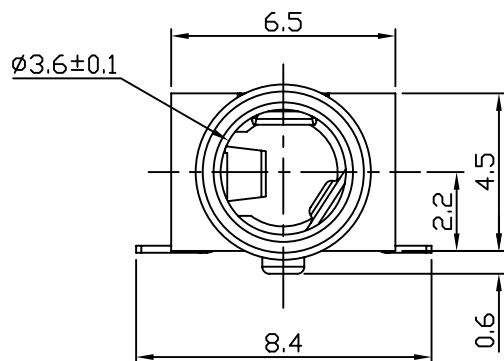


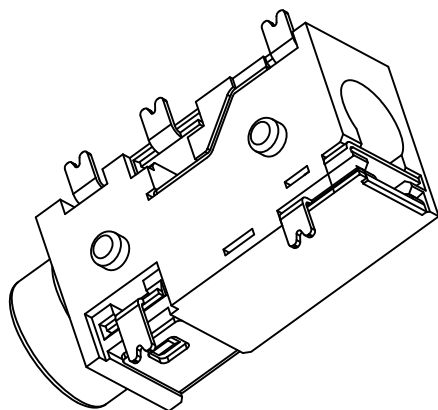

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

SCHEMATIC

PJ-W27B2-05D3



UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

6	HOUSING	1	LCP	UL-94V0(BLACK)
5	CONTACT FOOT	1	C2680 t=0.20	MB:Ni Au PLATED
4	CURVE PIECE	1	C5191 t=0.20	MB:Ni Au PLATED
3	SPRING FOOT	1	C5191 t=0.20	MB:Ni Au PLATED
2	SPRING FOOT	1	C5191 t=0.20	MB:Ni Au PLATED
1	CONTACT FOOT	1	C5191 t=0.20	MB:Ni Au PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-W27B2-05D3-LF

SERIES LEADFREE
5P3C
BUSHING 2.0mm
POST 2.4+7mm
90°SMT

DESCRIPTION: MINIATURE JACK