


Pin Hole Layout
(Jack Bottom View)

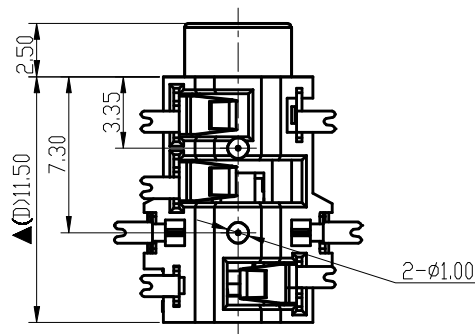

SPECIFICATIONS:
 Contact Resistance : 30m Ω max
 Insertion Resistance : 100M Ω min. at DC 500V
 Electric Withstanding Voltage: AC 500V for one minute
 Mark: ▲: The Most Important Dimension

5.	Make Contact	0.25T Brass	1	Gold Plated
4.	Contact	0.25T Phosphor Bronze	3	Gold Plated
3.	Transfer Contact	0.25T Phosphor Bronze	1	Gold Plated
2.	Earth Contact	0.25T Phosphor Bronze	1	Gold Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. \pm

CHECKED BY GENIUS

.X \pm

UNIT / mm

SCALE 1 : 1

.XX \pm

DATE

.XXX \pm

ANG \pm

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

PJ-W34-06D-LF
 SERIES | LEADFREE
 6P4C
 POST 3.35+3.95mm
 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 3.5 ϕ PHONE JACK