
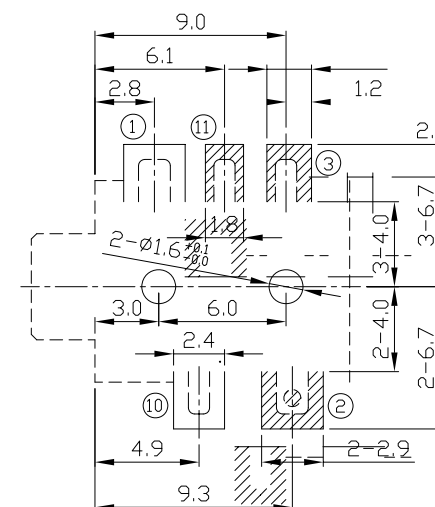


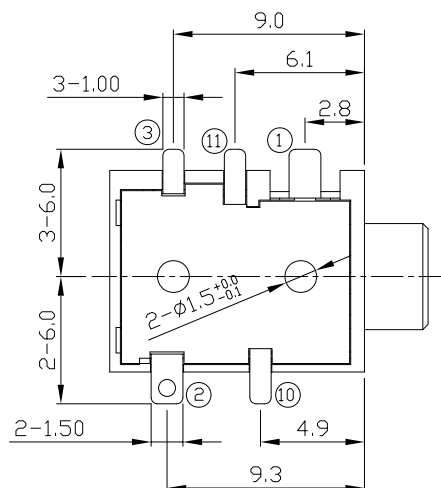

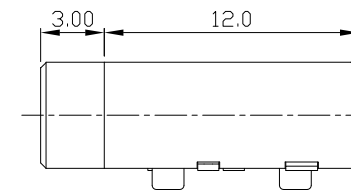
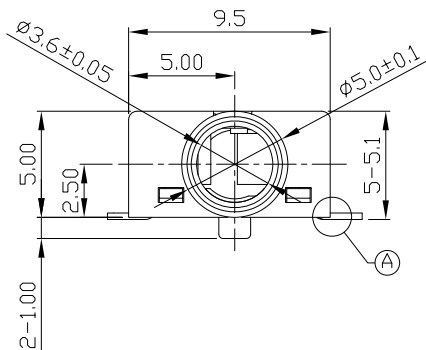


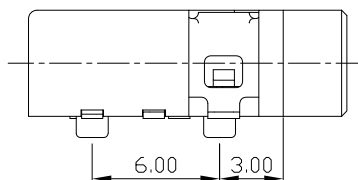

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)

7	COVER	1	PA10T		BLACK
6	HOUSING	1	PA10T		BLACK
5	TERMINAL 11	1	COPPER ALLOY	Gold	
4	TERMINAL 10	1	COPPER ALLOY	Gold	
3	TERMINAL 3	1	BRASS	Gold	
2	TERMINAL 2	1	BRASS	Gold	
1	TERMINAL 1	1	BRASS	Gold	
NO	PART NAME	Q'TY	MATERIAL	PLATED	REMARK

MODEL NO.	PJ-W36GR-05C	PJ-W36GR-04C2	PJ-W36GR-04C3	PJ-W36GR-03	PJ-W36GR-03B
SCHEMATIC					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.15

.XXX ±

ANG ±


PPOJECTION

照片框

ORDER INFORMATION

PJ-W36GR-xxx-LF
SERIES REEL LEADFREE SCHEMATIC
GOLD 3.0±6.0mm 90°SMT

DESCRIPTION: EARPHONE JACK (SMT)

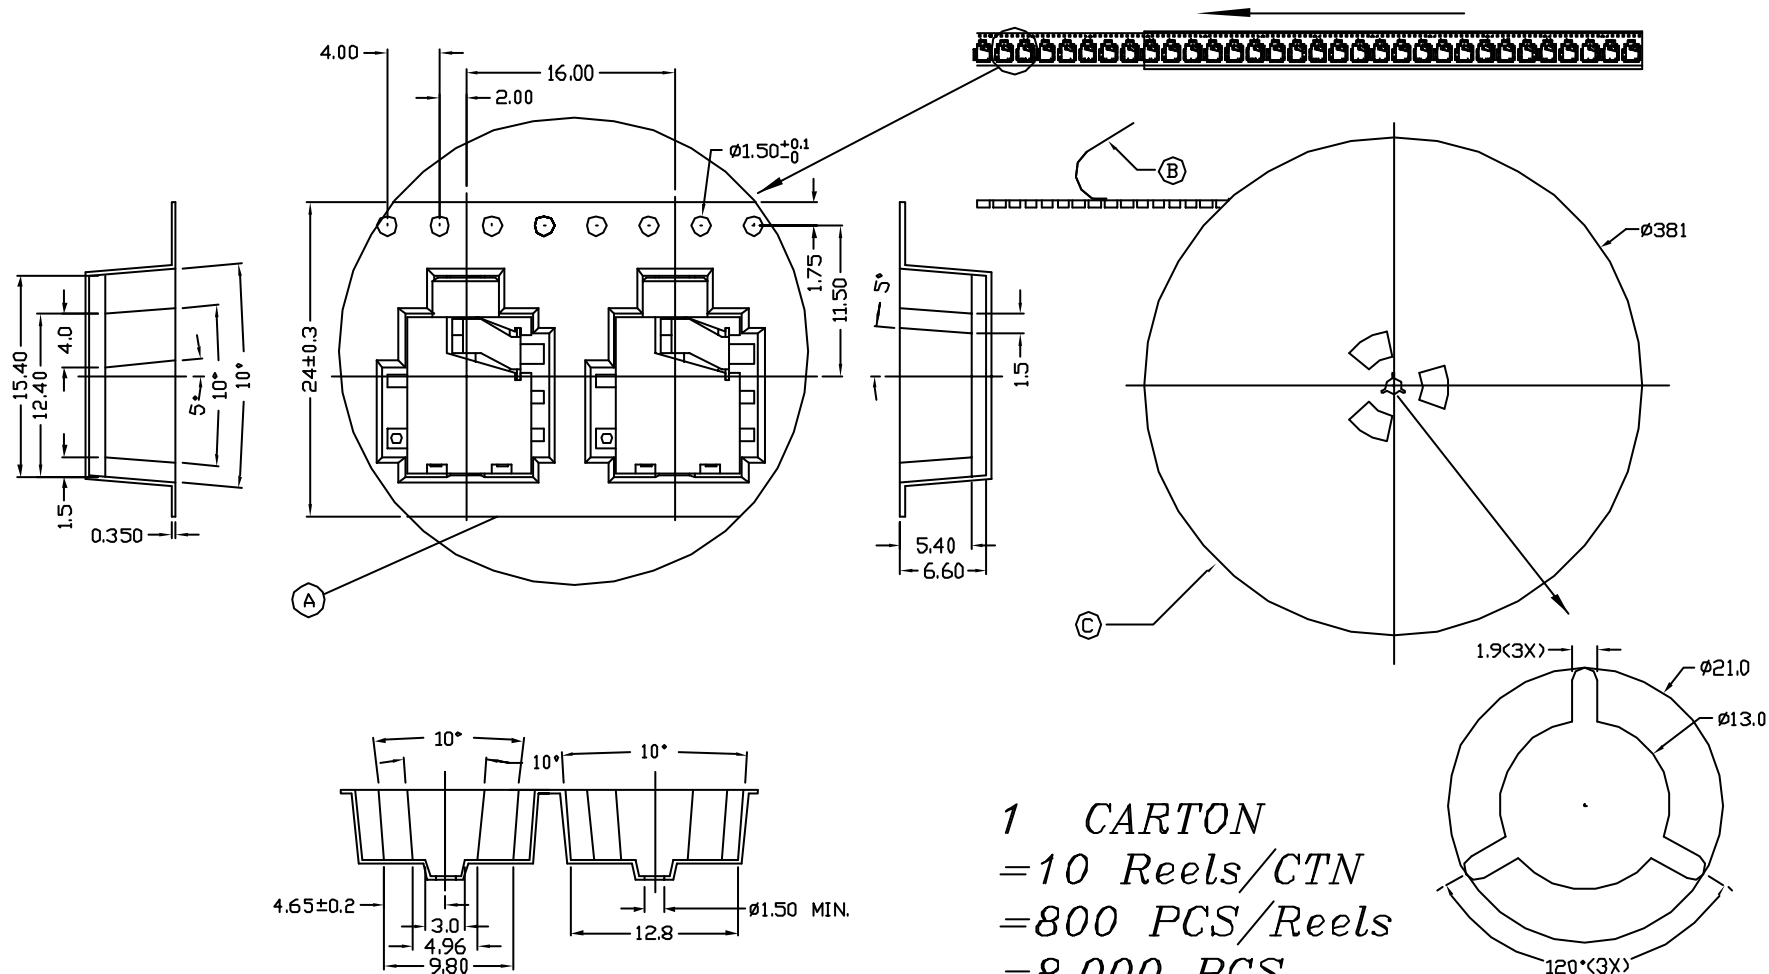

POLYPROPYLENE

1 CARTON
= 10 Reels/CTN
= 800 PCS/Reels
= 8,000 PCS

C	REEL	PLASTIC
B	COVER TAPE	POLYETHYLENE TEREPHTHALATE(21.3mmx200m)
A	CARRYING TAPE	POLYPROPYLENE
NO	PART NAME	MATERIAL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PJ-W36GR-xxx-LF
SERIES REEL LEADFREE SCHEMATIC
GOLD
3.0+6.0mm
90°SMT

DESCRIPTION: EARPHONE JACK (SMT)