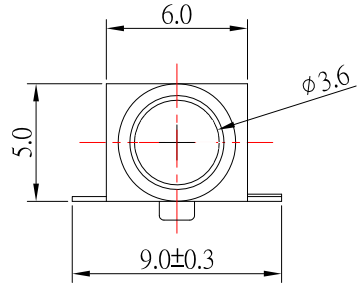

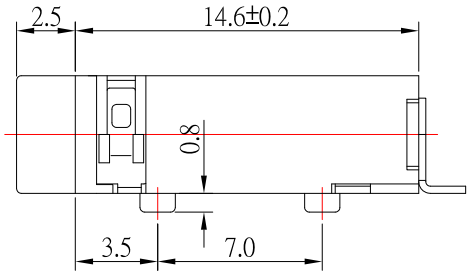

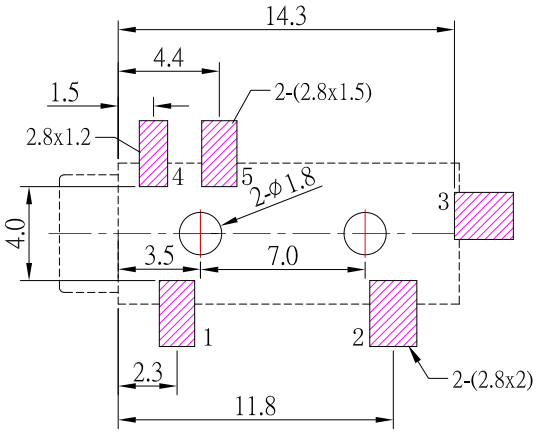

P.C.B LAYOUT
TOP VIEW

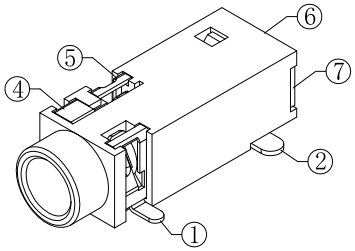

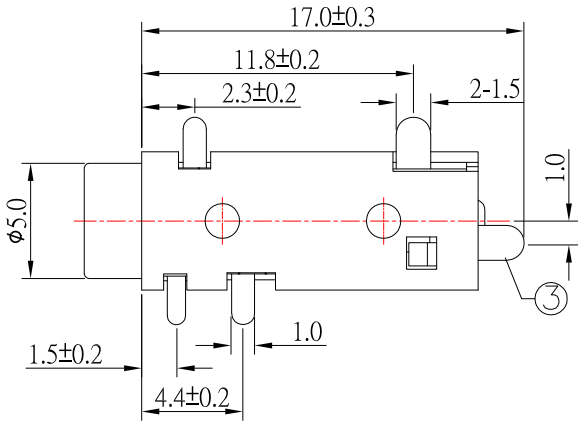

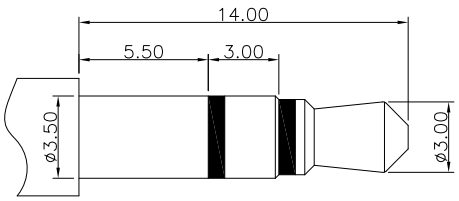

ø3.50mm 3 POLE PLUG

SCHEMATIC

PJ-W37-05C	PJ-W37-04C2	PJ-W37-04C3	PJ-W37-03
			

SPECIFICATIONS:

1.Rating : DC 30V , 1.0A ;

2.Contact Resistance : ≤30mΩ Max;

3.Insulation Resistance : ≥100MΩ Min ;

4.Withstand voltage : 500VAC

5.Insertion and extraction force : 3-20N

6.Life test : 5,000 cycles

NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING
7	COVING	1	PA9T	
6	HOUSING	1	PA9T	
5	#5 CONTACT FOOT	1	SUS	Ag-Plating
4	#4 CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	#3 CONTACT FOOT	1	BRASS	Ag-Plating
2	#2 CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	#1 CONTACT FOOT	1	SUS	Ag-Plating

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm | SCALE 1 : 1
DATE
SIZE A4 PPOJECTION

TOLERANCES ARE

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

照片框

ORDER INFORMATION

PJ-W37-xx-LF
SERIES
90°SMT
POST 3.5+7.0mm
SCHEMATIC
LEADFREE

DESCRIPTION: 3.5mm PHONE JACK