


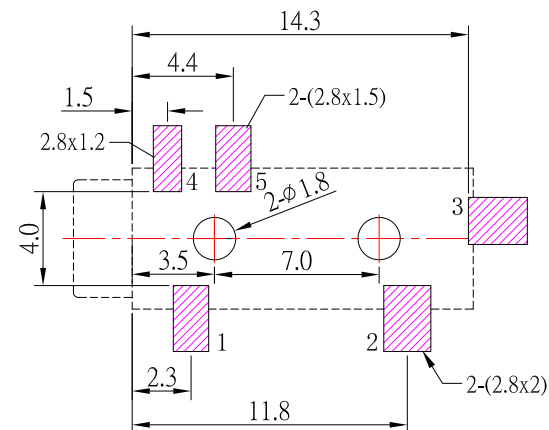
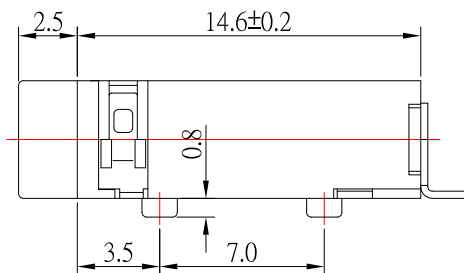
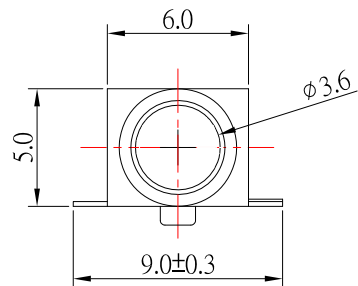


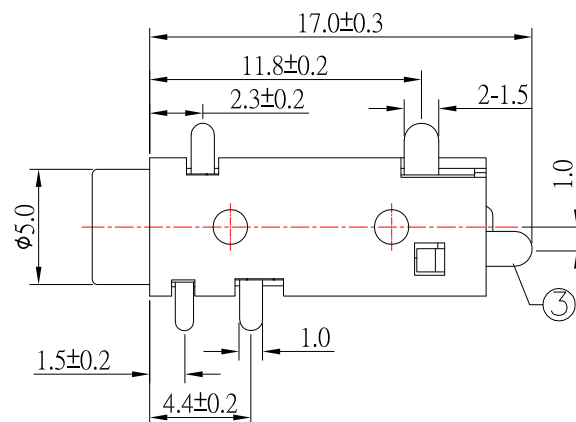

P.C.B LAYOUT
TOP VIEW

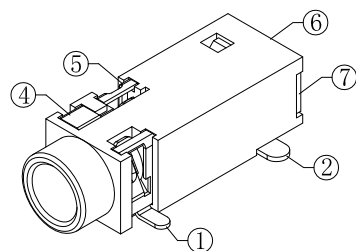

SCHEMATIC

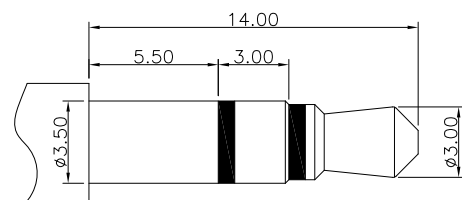

ø3.50mm 3 POLE PLUG

SPECIFICATIONS:

1. Rating : DC 30V , 1.0A ;
2. Contact Resistance : $\leq 30\text{m}\Omega$ Max;
3. Insulation Resistance : $\geq 100\text{M}\Omega$ Min ;
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. Life test : 5,000 cycles

PJ-W37-05C	PJ-W37-04C2	PJ-W37-04C3	PJ-W37-03

7	COVING	1	PA9T	
6	HOUSING	1	PA9T	
5	#5 CONTACT FOOT	1	SUS	Ag-Plating
4	#4 CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	#3 CONTACT FOOT	1	BRASS	Ag-Plating
2	#2 CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	#1 CONTACT FOOT	1	SUS	Ag-Plating
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING

RoHS Compliant

TOLERANCES ARE

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

照片框

ORDER INFORMATION

PJ-W37R-xx-LF
SERIES | LEADFREE
SCHEMATIC
REEL
POST 3.5+7.0mm
90°SMT

DESCRIPTION: 3.5mm PHONE JACK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS



UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

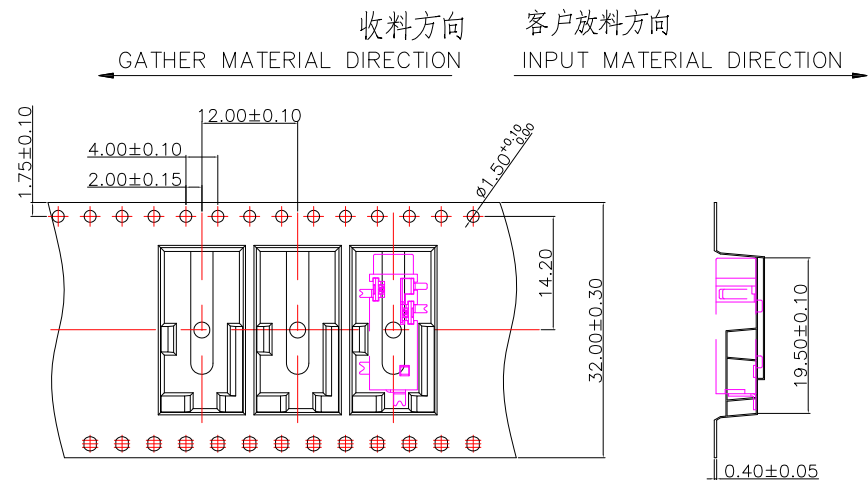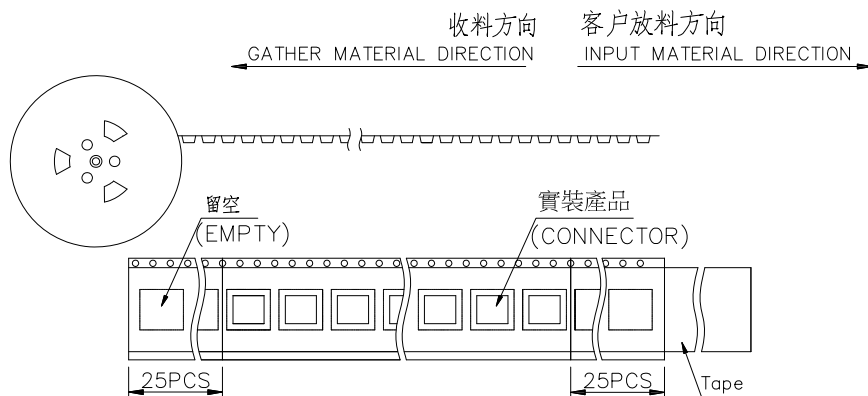

料帶(1000pcs/盤)

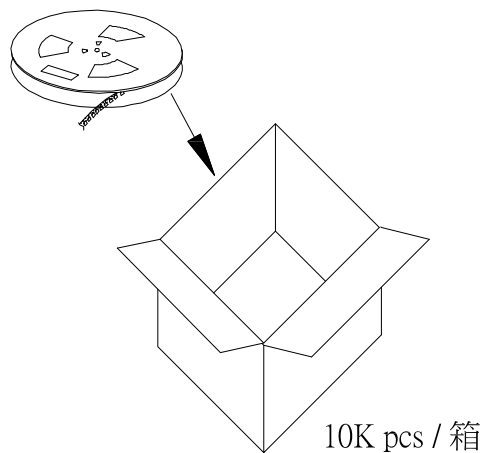

1.料帶使用13" 32m/m膠盤,包裝數量:1000PCS.

2.外箱規格:35*35*36.2cm.

PACKAGE. INFORMATION

PART NUMBER	Q"TY PER REEL	REEL PER BOX	Q"TY PER BOX
PJ-W37R-xx	1000PCS	10R	10000 PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

照片框

ORDER INFORMATION

PJ-W37R-xx-LF
SERIES
LEADFREE
SCHEMATIC
REEL
POST 3.5+7.0mm
90°SMT

DESCRIPTION: 3.5mm PHONE JACK