

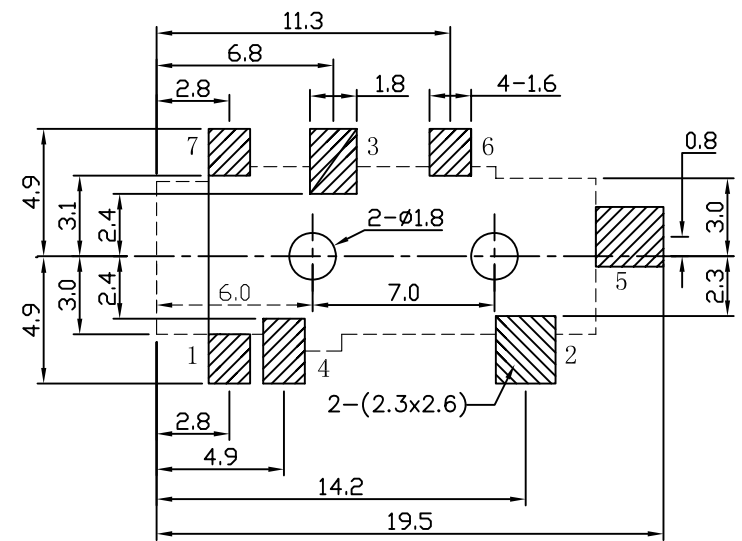
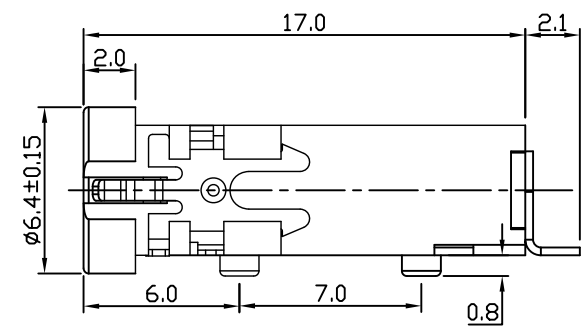
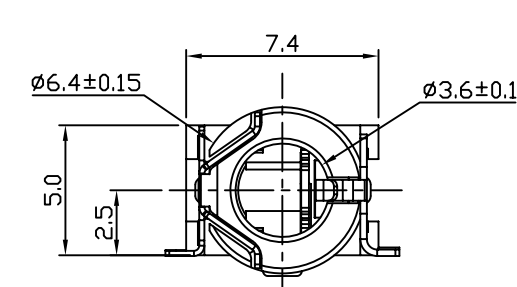



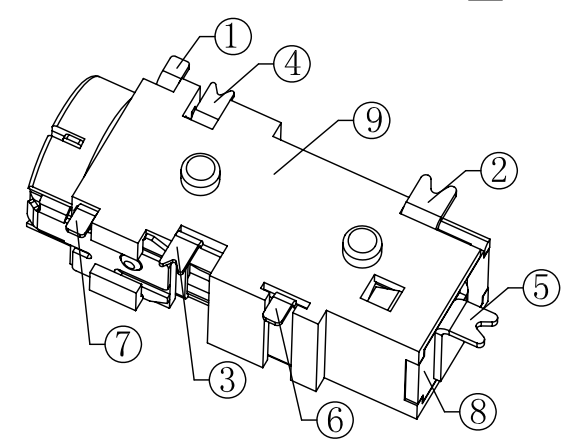

T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

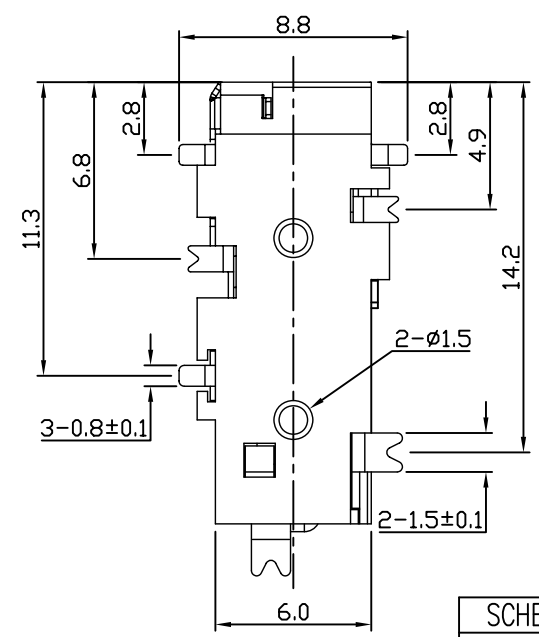

9	HOUSING	1	PA9T	UL-94V0(BLACK)
8	COVER	1	PA46	UL-94V0(BLACK)
7	EARTH TERMINAL	1	C5191 t=0.20	Aq PLATED
6	SHUNT TERMINAL	1	C2680 t=0.20	Aq PLATED
5	SHUNT TERMINAL	1	C2680 t=0.30	Aq PLATED
4	RING SPRING	1	SUS301 t=0.20	Aq PLATED
3	RING SPRING	1	SUS301 t=0.20	Aq PLATED
2	TIP SPRING	1	C5191 t=0.30	Aq PLATED
1	EARTH SPRING	1	C5191 t=0.25	Aq PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PJ-W47SB2-07E-LF

SERIES
LEADFREE
7P5C
BUSHING 2.0mm
SPRING
POST 4.0+7.0mm
90°SMT

DESCRIPTION: MINIATURE JACK