

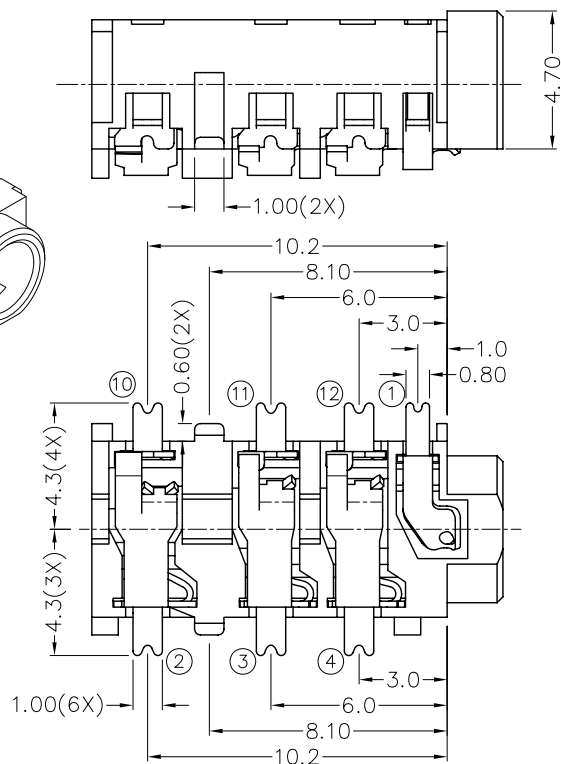



* MATERIAL

TERMINAL 1 : COPPER ALLOY
 TERMINAL 2 : COPPER ALLOY
 TERMINAL 3 : COPPER ALLOY
 TERMINAL 4 : COPPER ALLOY
 TERMINAL 10 : COPPER ALLOY
 TERMINAL 11 : COPPER ALLOY
 TERMINAL 12 : COPPER ALLOY
 HOUSING : PA6T

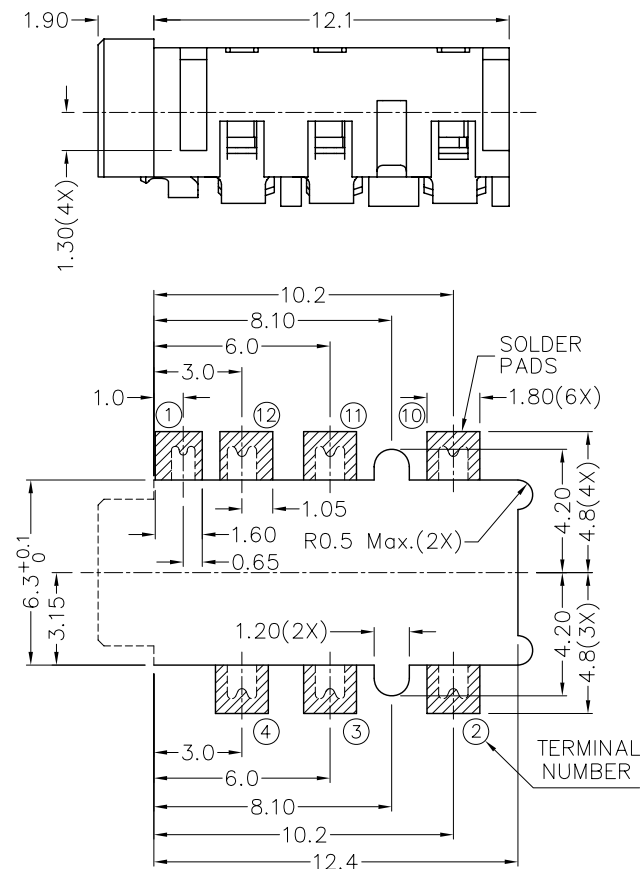

RECOMMENDED
 SOLDER PAD LAYOUT
 (TOP VIEW)



MODEL NO.	PJ-WF36R-07D	PJ-WF36R-06D	PJ-WF36R-05DR	PJ-WF36R-05DL	PJ-WF36R-04
SCHEMATIC					

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

PJ-WF36R-xxx-LF
 SERIES REEL LEADFREE SCHEMATIC
 3.0+6.0mm
 OFFSET
 90°SMT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1



DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$ 0.20
 .XX $\pm$ 0.10
 .XXX $\pm$ 0.05
 ANG $\pm$


DESCRIPTION:

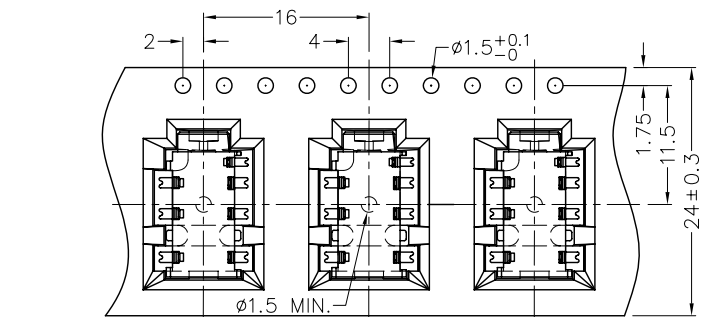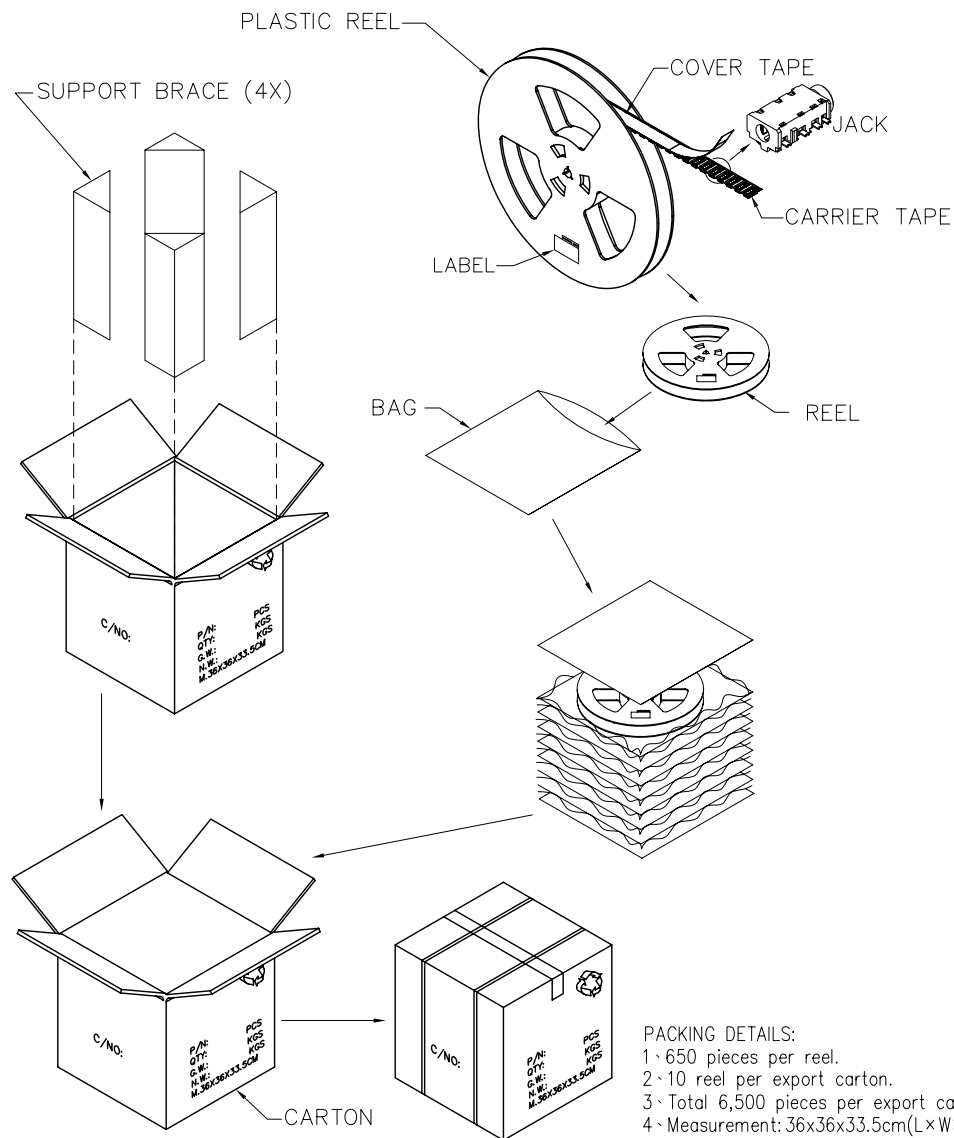

CARRIER TAPE

GATHER MATERIAL
DIRECTION

INPUT MATERIAL
DIRECTION

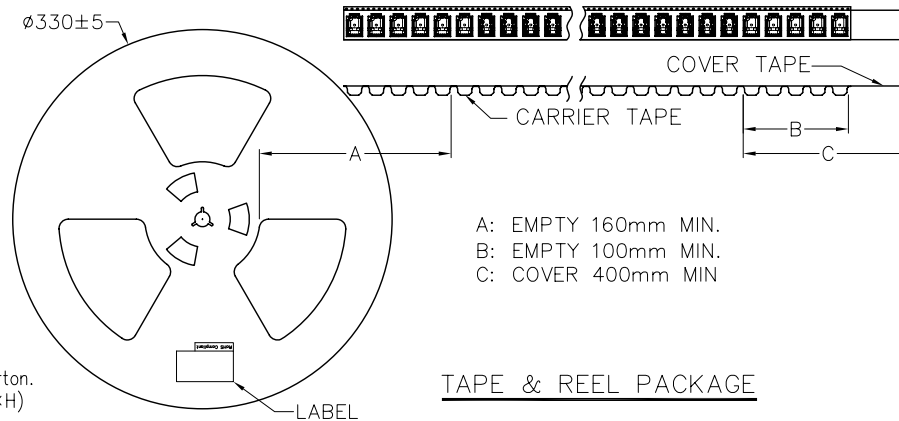

A: EMPTY 160mm MIN.
B: EMPTY 100mm MIN.
C: COVER 400mm MIN

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

PJ-WF36R-xxx-LF

SERIES REEL LEADFREE SCHEMATIC

3.0 ± 0.1mm

OFFSET

90°SMT

DESCRIPTION:

MORETHANALL

PCB CONNECTORS

Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION