

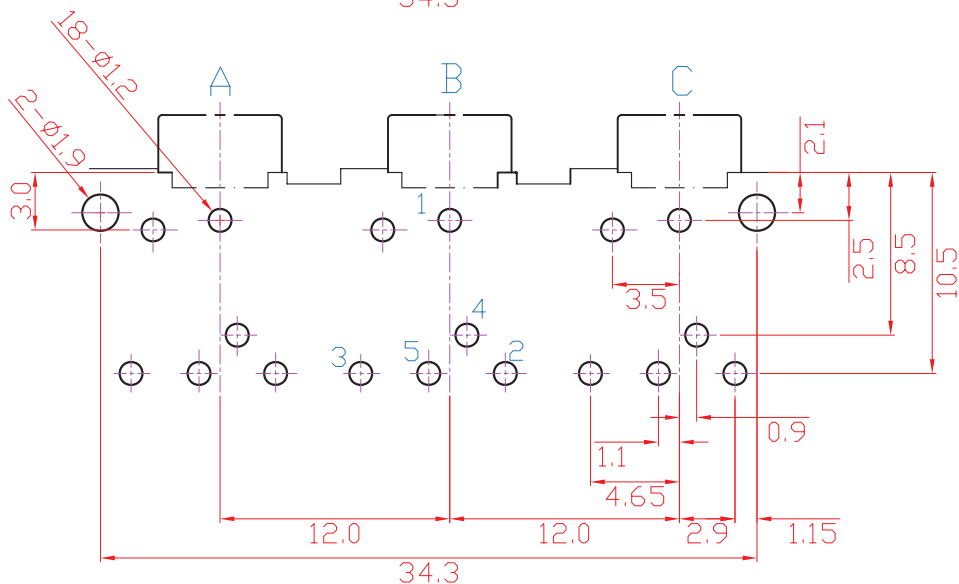


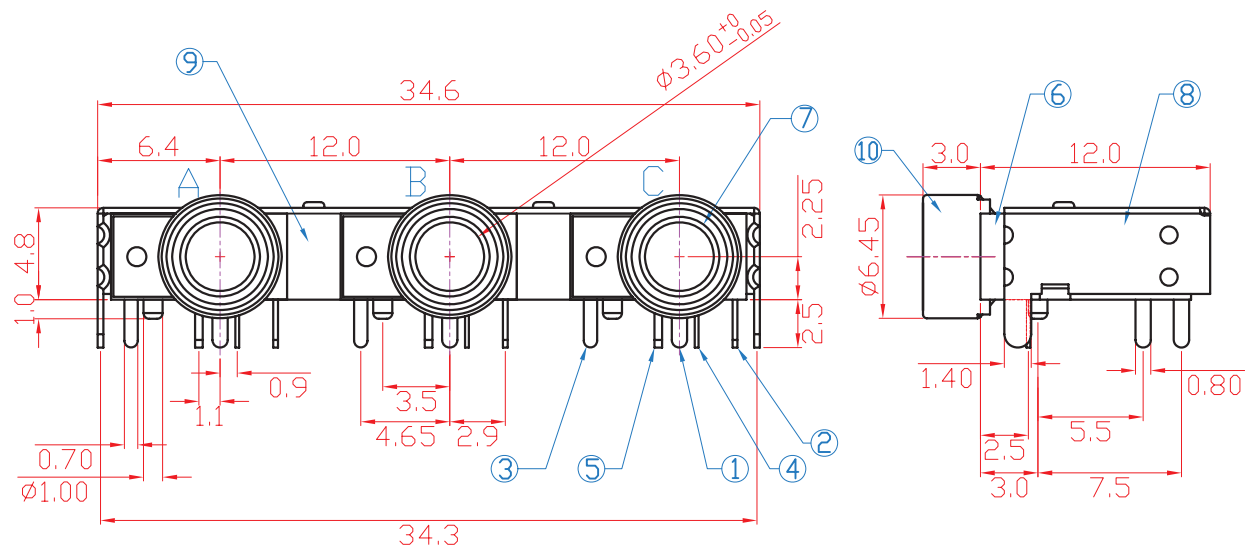

PCB LAYOUT
(BOTTOM VIEW)

NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND TERM.	BRASS 0.20	TIN PLATED	3
2	TIP SPRING	PBS 0.25	TIN PLATED	3
3	RING SPRING	PBS 0.50	TIN PLATED	3
4	TIP BREAK	BRASS 0.20	TIN PLATED	3
5	RING BREAK	BRASS 0.40	TIN PLATED	3
6	HOUSING	NYLON PA9T G.F	PINK/LIGHT BLUE/TIME	3
7	BUSHING	BRASS	NICKEL PLATED	3
8	SHELL	SPCC 0.30	NICKEL PLATED	1
9	HOLDER	PBT G.F	BLACK	1
10	GROUND RING	BRASS 0.20	NICKEL PLATED	1

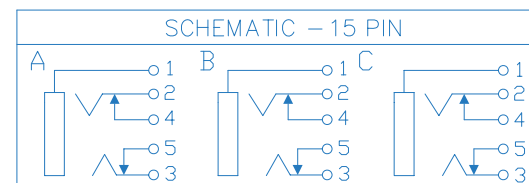

MODEL NO.	(PC99 Color)		
HOUSING COLOR	RED	BLUE	GREEN
PANTONE	A	B	C

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max.1KHz.
Insulation Resistance: 100M Ohm Min. At 500V DC.
Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.
Dielectric Withstanding Voltage: 500V AC For 1 Minute.
Durability (Life Test): For PBS 2000 Cycles Minimum.
Insertion Force: 0.3~3.0 Kg.
Extraction Force: 0.3~3.0Kg.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4


TOLERANCES ARE

X. ± 0.38
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

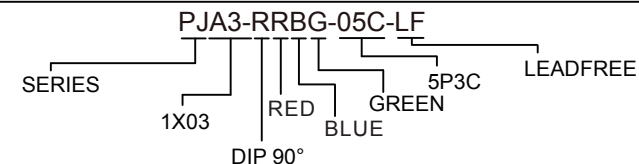

DESCRIPTION: Ø3.5EARPHONE JACK