
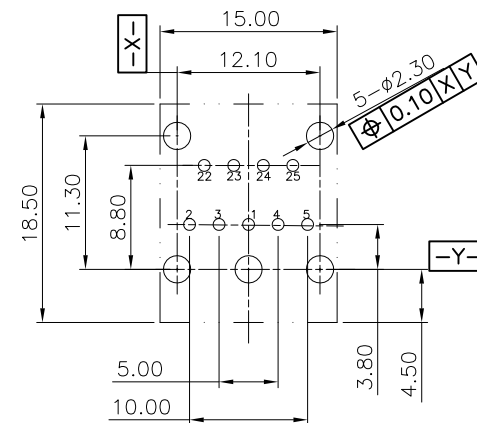


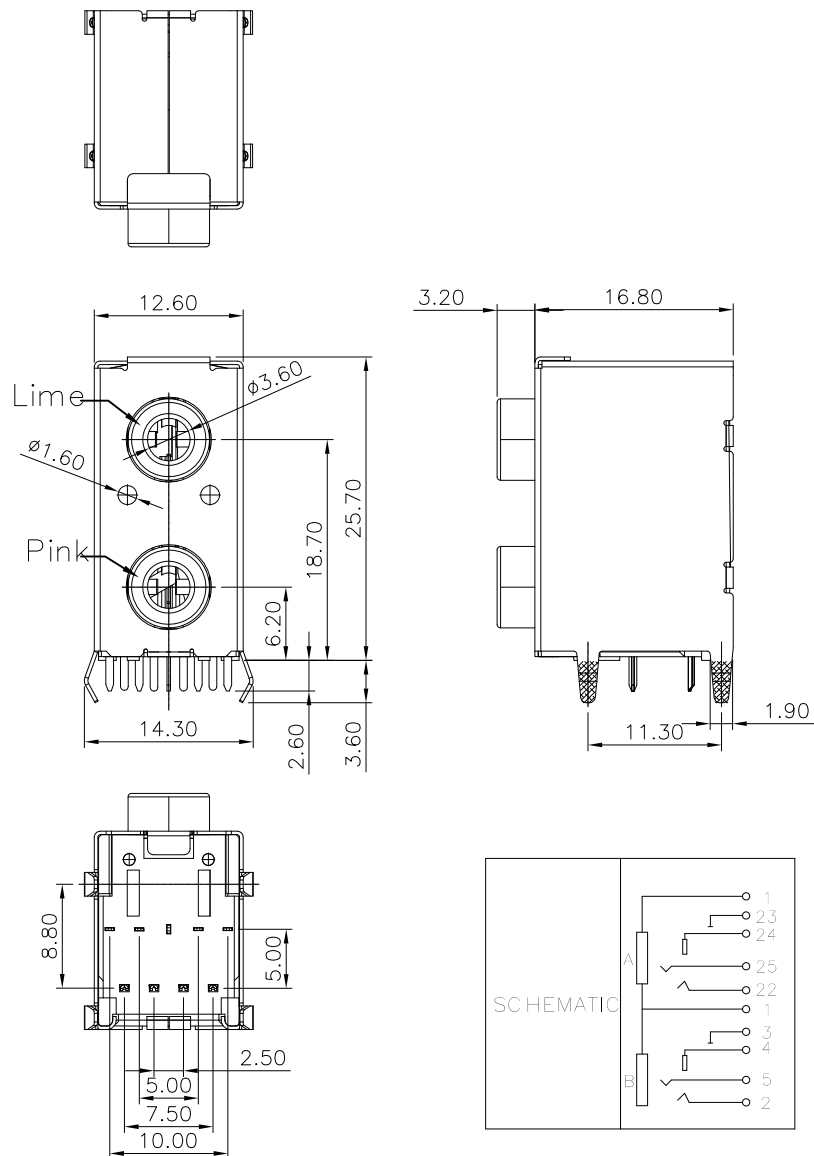

RECOMMENDED PCB LAYOUT
COMPONENT SIDE
TOLERANCE: ± 0.05

13	Plastic Bushing	PA66+15%G.F, UL94V-0		1
12	Housing	PBT+30%G.F, UL94V-0	Black	1
11	Cover	LCP+30%G.F, UL94V-0	Black	1
10	Shield	SPCC	Bright 100u"Tin Plated Cover 50u"Nickel Plated	1
9	2-Tip Terminal	Copper Alloy	Au G/F & Tin Plated & Nickel Plated	1
8	2-TS Terminal	Copper Alloy	Au G/F & Tin Plated & Nickel Plated	1
7	2-RS Terminal	Copper Alloy	Au G/F & Tin Plated & Nickel Plated	1
6	2-Ring Terminal	Copper Alloy	Au G/F & Tin Plated & Nickel Plated	1
5	Tip Terminal	Copper Alloy	Au G/F & Tin Plated & Nickel Plated	1
4	TS Terminal	Copper Alloy	Au G/F & Tin Plated & Nickel Plated	1
3	RS Terminal	Copper Alloy	Au G/F & Tin Plated & Nickel Plated	1
2	Ring Terminal	Copper Alloy	Au G/F & Tin Plated & Nickel Plated	1
1	Sleeve Terminal	Copper Alloy	Au G/F & Tin Plated & Nickel Plated	1
ITEM	NAME	MATERIAL	FINISH	SUM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.25
.XXX $\pm$ 0.10
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

PJB1-RFGP-09-LF

SERIES LEADFREE
09 WAY
PINK
GREEN
FULL METAL
DIP 90°

DESCRIPTION: TWO LAYER DIA. 3.6mm PHONE JACK, PCB MOUNT, RIGHT ANGLE WITH POST, METAL SHIELD