



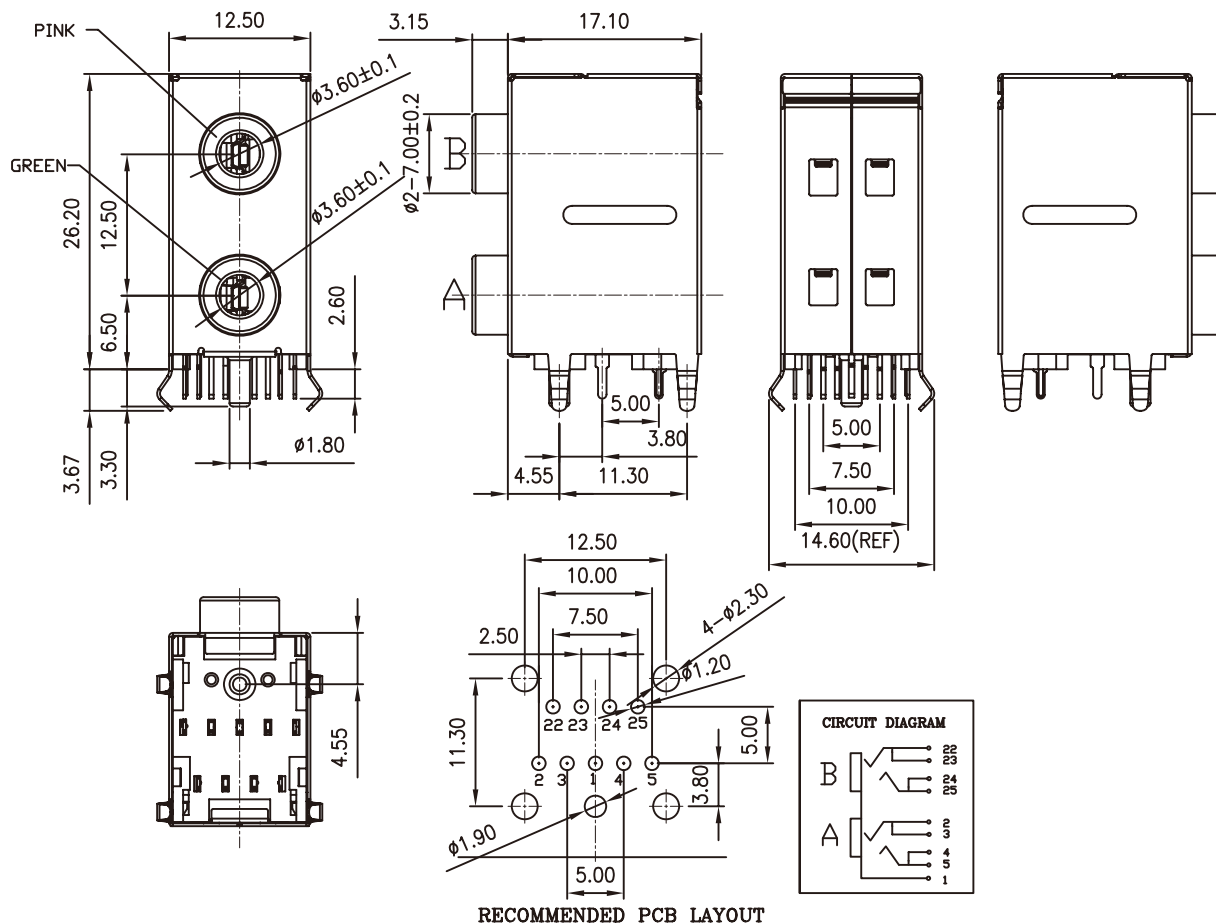

3.OPERATING TEMPERATURE: -25 TO +85 °C.

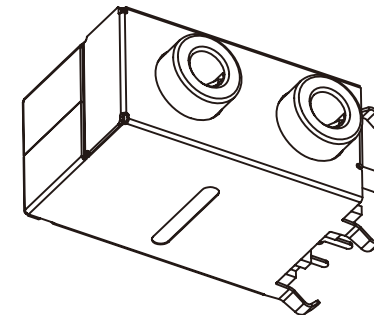

16	BACK SHELL	SPCC T=0. 2mm	1	NI
15	SHELL	SPCC T=0. 25mm	1	NI
14	BACK COVER	PBT (BLACK)	1	————
13	TER' -24	BRASS T=0. 40mm	1	Sn
12	TER' -23	BRASS T=0. 40mm	1	Sn
11	TER' -4	BRASS T=0. 40mm	1	Sn
10	TER' -3	BRASS T=0. 40mm	1	Sn
9	TER' -25	PHOSPHOR BRONZE T=0. 25mm	1	Sn
8	TER' -22	PHOSPHOR BRONZE T=0. 25mm	1	Sn
7	TER' -5	PHOSPHOR BRONZE T=0. 25mm	1	Sn
6	TER' -2	PHOSPHOR BRONZE T=0. 25mm	1	Sn
5	TER' -1	BRASS T=0. 5mm	1	GOLDIU' Sn100u'
4	BASE-B	PBT (PINK)	1	————
3	BASE-A	PBT (GREEN)	1	————
2	COVER	PA46 (BLACK)	1	————
1	Housing	PBT (BLACK)	1	————
NO.	PART NAME	MATERIAL	Q' TY	PLATING

照片框

SERIES

LEADFREE

09 WAY

GREEN

PINK

FULL METAL

DIP 90°

DESCRIPTION: MINIATURE JACK