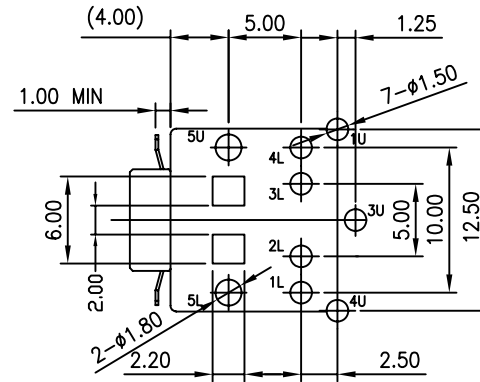


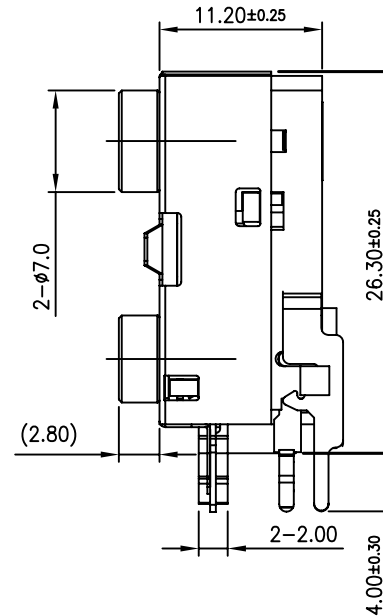
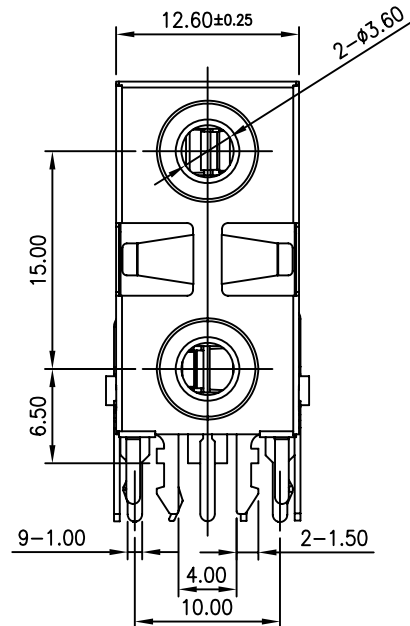
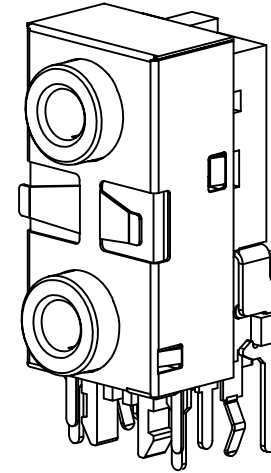
NOTE:






- 1>PLASTIC BUSHING
2>COLOR INSULATOR RING
IS AVAILBALE MEET PC99



RECOMMENDED PCB LAYOUT
[BOTTOM VIEW]

TOLERANCE:±0.20 FOR ALL OTHERs



SCHEMATIC			
	PART NO.	PJB1-RS-09	PJB1-RS-08L
SCHEMATIC			
	PART NO.	PJB1-RS-06	PJB1-RS-06M

ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE
(3)	FRONT SHIELD	COPPER ALLOY	NI/TIN	1	20T
(2)	GND CONTACT	COPPER ALLOY	TIN	1	40T
(1)	TIP LEAD	COPPER ALLOY	TIN	1	40T
(10)	TIP CONTACT	COPPER ALLOY	TIN	1	25T
(9)	RING LEAD	COPPER ALLOY	TIN	1	40T
(8)	RING CONTACT	COPPER ALLOY	TIN	1	25T
(7)	GND CONTACT	COPPER ALLOY	TIN	1	40T
(6)	TIP CONTACT	COPPER ALLOY	TIN	1	25T
(5)	TIP SHUNT	COPPER ALLOY	TIN	1	40T
(4)	RING SHUNT	COPPER ALLOY	TIN	1	40T
(3)	RING CONTACT	COPPER ALLOY	TIN	1	25T
(2)	COVER	HIGH-TEMP PLASTIC	UL94V-0	1	
(1)	HOUSING-1	HIGH-TEMP PLASTIC	UL94V-0	1	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PJB1-RS-xx-LF

SERIES T LEADFREE
06:06 WAY
09:09 WAY
ALL PLASTIC
DIP 90°

DESCRIPTION: 3.5φ STACKED STERED JACK PLASTIC BUSHING/FRONT SHIELD