
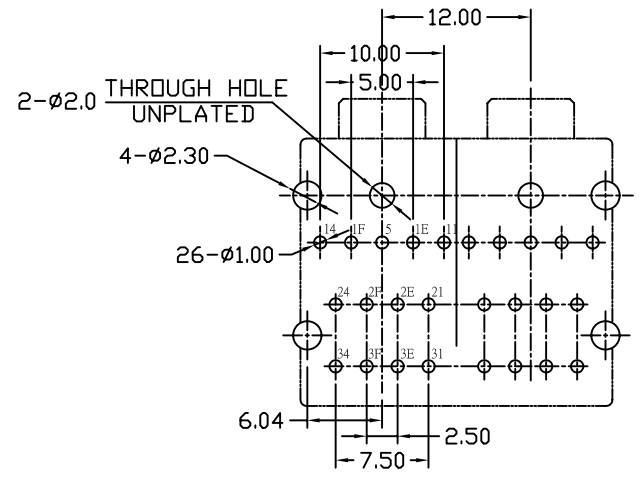
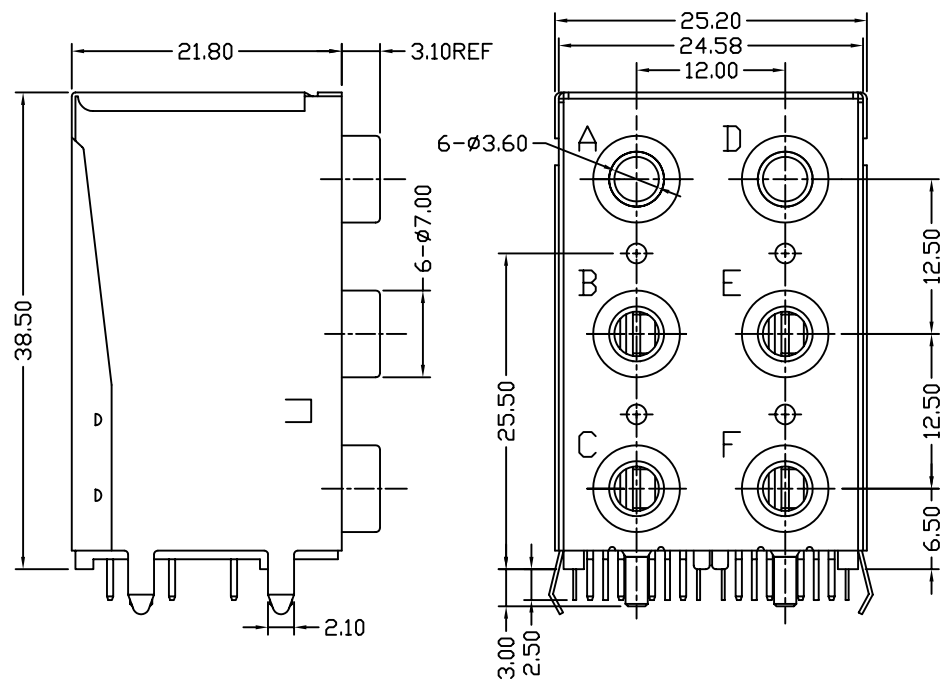


SCHEMATIC

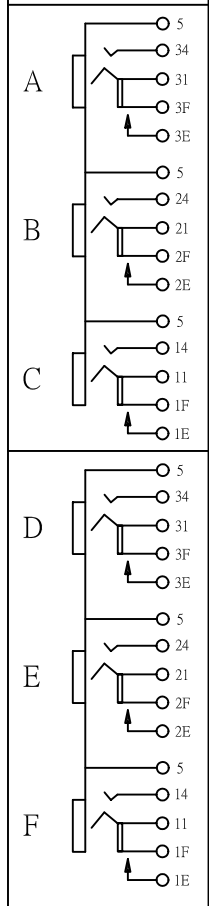

RECOMMENDED P.C.B HOLE LAYOUT
TOLERANCE: ±0.05

PARTNUMBER	No.	A	B	C	D	E	F
PJC2-RF38KK-05D	COLOUR	BLUE	GREEN	RED	BLACK	BLACK	BLACK
PJC2-RF38KO-05D	COLOUR	BLUE	GREEN	RED	BLACK	ORANGE	GREY

- MATERIALS**
- HOUSING : THERMOPLASTIC, UL 94V-0(E107536)
 - TERMINAL : COPPER ALLOY, SELESTIVE
1u" MIN. GOLD PLATING AT INTERFACE SIDE,
120u" MIN. TIN PLATING AT SOLDER SIDE,
50u" MIN. NICKEL UNDERPLATINF OVERALL.
 - FRONT SHIELD : BRASS 100u" MIN. TIN PLATING OVERALL
 - BACK SHIELD : BRASS 100u" MIN. NICKEL PLATING OVERALL

- SPECIFICATION**
- CURRENT RATING : 0.3 AMP. MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR PER MINUTE.
 - INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC.
 - CONTACT RESISTANCE : 50m OHMS MAX.
 - OPERATING TEMPERATURE : -25°C ~ +85°C.
 - DURABILITY : 5000 CYCLES.
 - MATING FORCE : 5kgs MAX.
 - UNMATING FORCE : 0.4~3.0kgs
 - MAX PROCESSING TEMPERATURE :
230°C FOR 30-60 SECONDS. (HI.-TEMP. PLASTIC)



煜倫有限公司

PART NO.	PJC2-RF38xx-05D	CHECKED BY	CY	TOLERANCES ARE .X ± 0.3 .XX ± 0.15 .XXX ± AWG	DESCRIP TION: SMART AUDIO JACK 六合一 PITCH 12.5mm		
DWG NO.	PJC2-RF38xx-05D						
FILE NO.		DRAWING BY					
UNIT / mm	SCALE 1:1	PROJECTION		AREA	REVISIONS	HK	DATE