


Water Proof:IP68
UV Resist

Pin Select	Electrial Specification
02~05P	10A/250V
04~06P	5A/250V
02+05P	7A+3A/250V
08~18P	2A/100V

7	Rope	Rubber EPDM	BLACK(0
6	Dust Cover	Rubber EPDM	BLACK(0
5	Sealing Nut	PA66-UL94V-1	BLACK(0
4	Rubber Seal	Rubber EPDM	BLACK(0
3	Body Housig	PA66-UL94V-1	BLACK(0
2	O-Ring	NBR Rubber	BLACK(0
1	Connector	PA66-UL94V-0/Barss Gold Plated	BLACK(0
NO	PART NAME	PART NO	COLOR

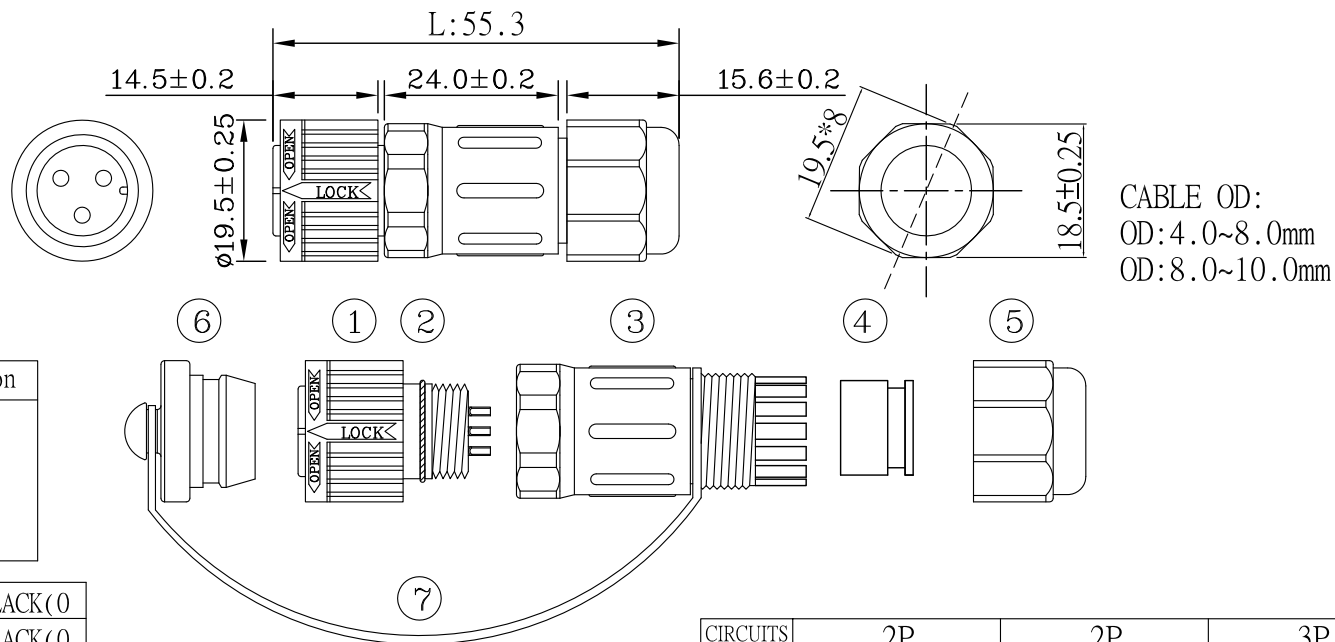

CIRCUITS	2P	2P	3P
ARRANGEMENT OF CONTACT			
SERIES	PLK16-SA-02B10	PLK16-SA-02A10	PLK16-SA-03A10

4P	4P	5P	5P	6P	2+5P	10P	12P	14P	18P
PLK16-SA-04A10	PLK16-SA-04A05	PLK16-SA-05A10	PLK16-SA-05A05	PLK16-SA-06A05	PLK16-SA-07A0307	PLK16-SA-10A02	PLK16-SA-12A02	PLK16-SA-14A02	PLK16-SA-18A02

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

PLK16-SA-xyzz-LF

SERIES
LEADFREE
AMP
KEY
02~18 WAY
ASSEMBLY
FEMALE

DESCRIPTION: