


NOTE:

1. MATERIAL AND FINISH
- 1.1. SHELL ASSEMBLY: COPPER ALLOY, OUTER SHELL AND COLLET
NUT Cr PLATING, OTHER METALLIC COMPONENTS Ni PLATING
- 1.2. INSULATOR: PEEK
- 1.3. CONTACT: COPPER ALLOY, GOLD PLATING
2. RoHS COMPLIANCE

No. OF CONTACTS	ØA	L
02,03,04,05,06,07,	0.7	3.0
08,10,12,14,16,18,19,	0.7	3.0
26,32,	0.5	3.0

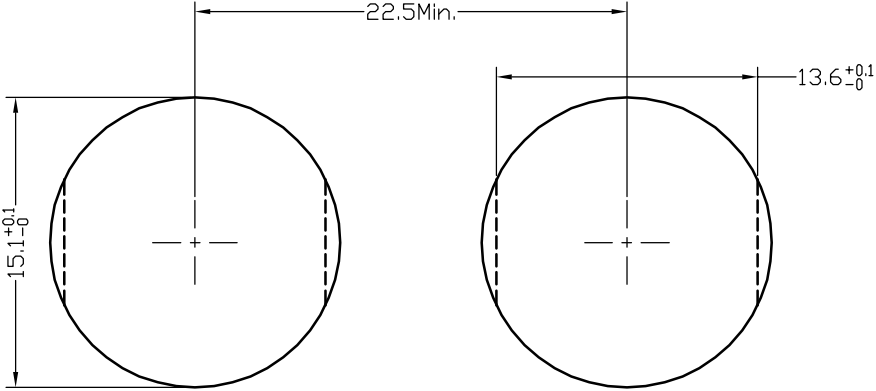

PANEL CUT-OUT

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.10
ANG ± 2°



照片框

ORDER INFORMATION

PM16-SDPANW-xy-LF
SERIES
FEMALE
PANEL FRONT
DIP 180°
LEADFREE
0~Z KEY
02~32 WAY
NUT+WASHER

DESCRIPTION:

2B FIXED SOCKET PRINT CONTACT TYPE VIEW

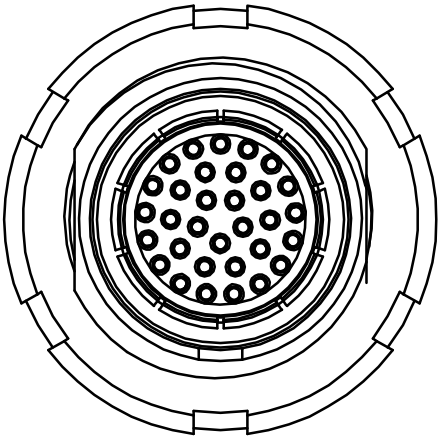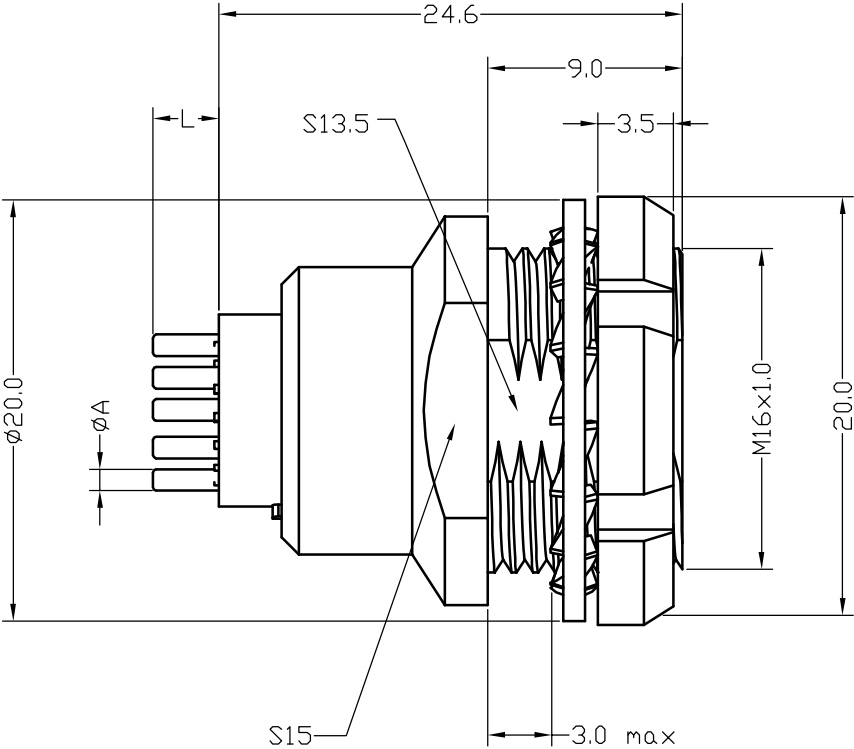

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

PM16-SDPANW-xy-LF

SERIES

FEMALE

PANEL FRONT

LEADFREE

0~Z KEY

02~32 WAY


NUT+WASHER

DIP 180°

DESCRIPTION:

view from termination side pin part


2 PDS.




3 PDS.




4 PDS.




5 PDS.




6 PDS.




7 PDS.




8 PDS.




10 PDS.



12 PDS.




14 PDS.




16 PDS.




18 PDS.




19 PDS.



26 PDS.



32 PDS.



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

PM16-SDPANW-xy-LF

SERIES

FEMALE

PANEL FRONT

0~Z KEY

02~32 WAY


NUT+WASHER

DIP 180°

LEADFREE

DESCRIPTION:

KEY ANGLES (RECEPTACLE FRONT VIEW):

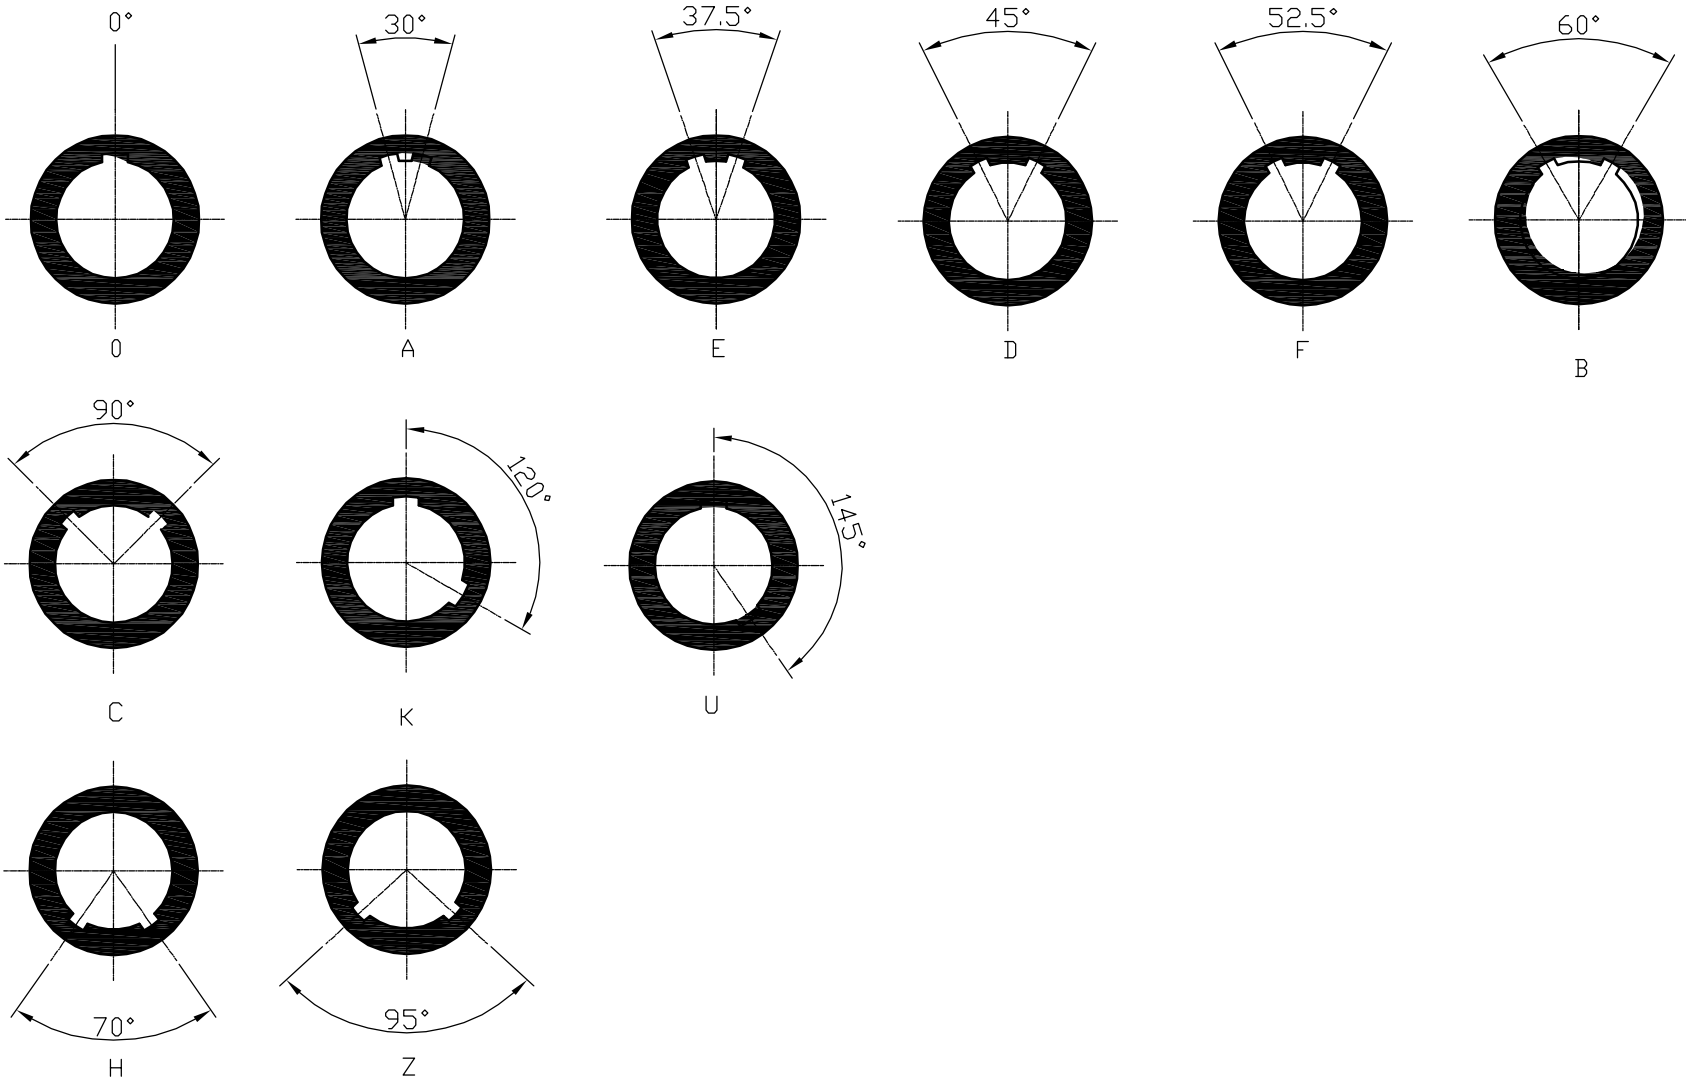

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.10
ANG ± 2°

PPOJECTION


照片框

ORDER INFORMATION

PM16-SDPANW-xyy-LF
SERIES | | | | |
FEMALE | | | | |
PANEL FRONT | | | | |
DIP 180° | | | | |
LEADFREE
0~Z KEY
02~32 WAY
NUT+WASHER

DESCRIPTION:

PCB Drilling Pattern

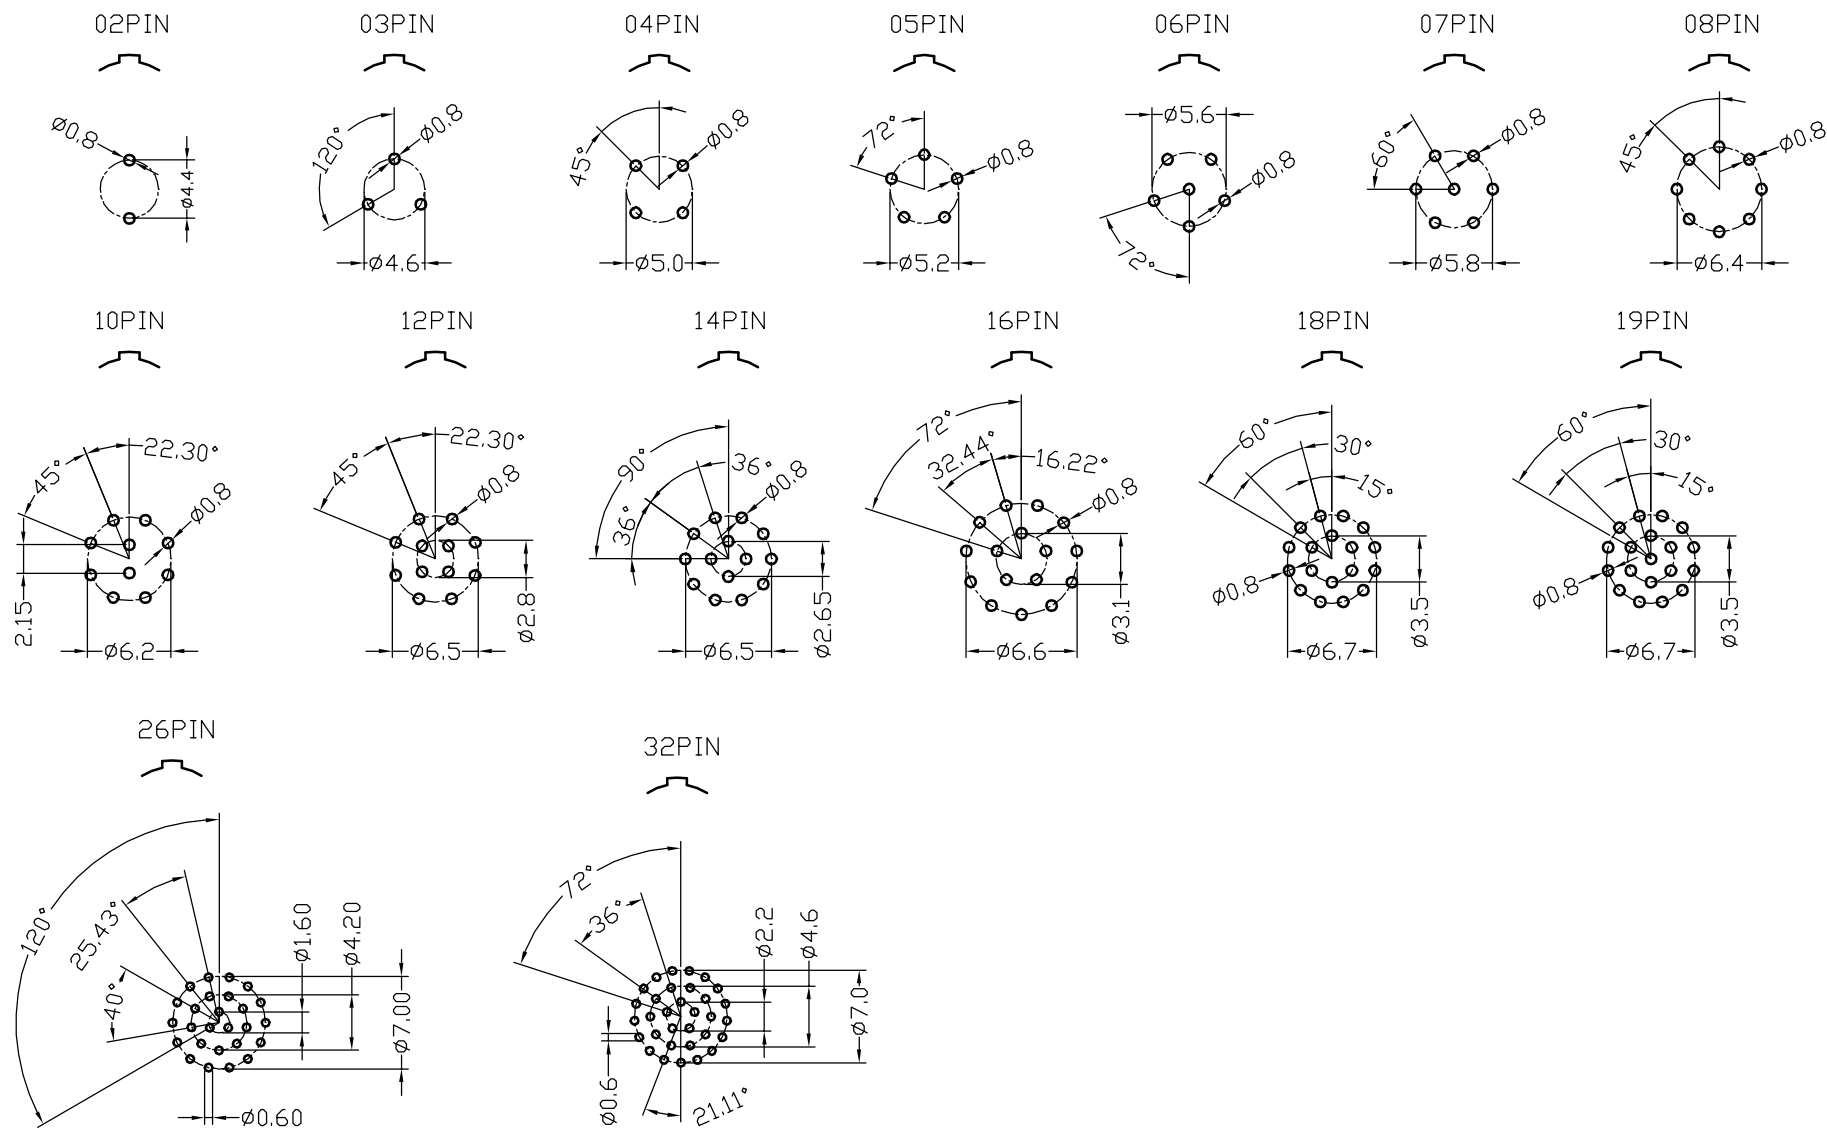

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ± 0.50

.XX ± 0.30

.XXX ± 0.10

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

PM16-SDPANW-xyy-LF

SERIES

FEMALE

PANEL FRONT

DIP 180°

LEADFREE
0~Z KEY
02~32 WAY
NUT+WASHER

DESCRIPTION: