
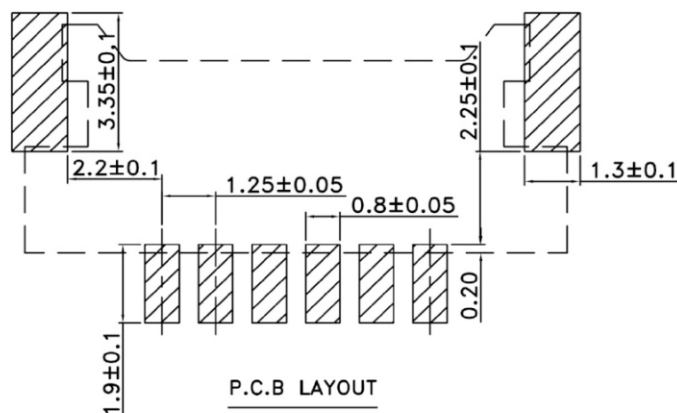
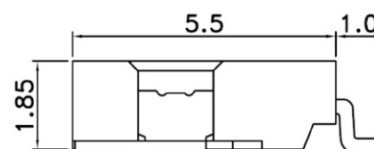
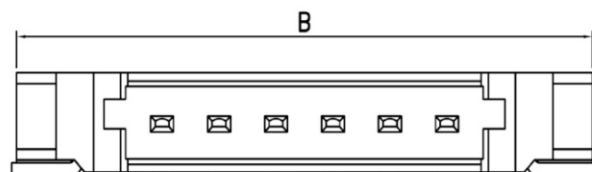
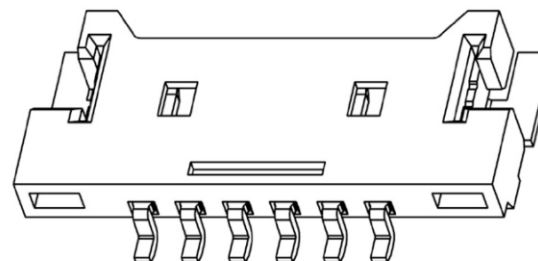


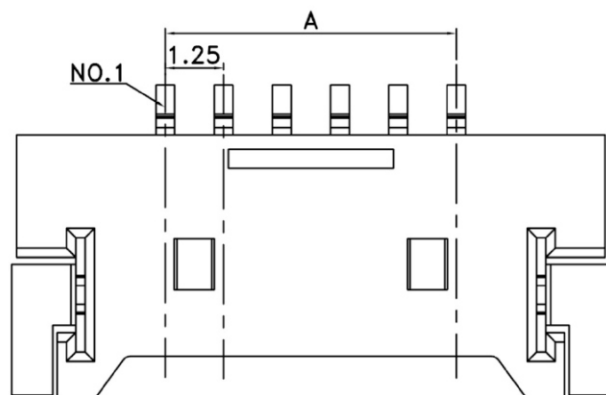

P.C.B LAYOUT

Specifications:

Electrical:

Rated Voltage: 125V AC,DC

Rated Current: 1.0A AC,DC

Withstand Voltage: 250V AC/minute

Contact Resistance: 20mΩ (MAX.)

Insulation Resistance: 100MΩ (MIN.)

Temperature Range: -25°C~+85°C


Circuits: 02~20,30

Color: Natural

Material: High Temperature plastic UL 94V-0

Dimensional

Circuits	Dimension mm		Reel/ Pcs
	A	B	
02	1.25	7.65	2,000
03	2.50	8.90	2,000
04	3.75	10.15	2,000
05	5.00	11.40	2,000
06	6.25	12.65	2,000
07	7.50	13.90	2,000
08	8.75	15.15	2,000
09	10.00	16.40	2,000
10	11.25	17.65	2,000
11	12.50	18.90	2,000
12	13.75	20.15	2,000
13	15.00	21.40	2,000
14	16.25	22.65	2,000
15	17.50	23.90	2,000
16	18.75	25.15	2,000
17	20.00	26.40	2,000
18	21.25	27.65	2,000
19	22.50	28.90	2,000
20	23.75	30.15	2,000
30	36.25	42.65	2,000



ORDER INFORMATION

PNM-WXG-xx-LF
 SERIES | | | LEADFREE
 | | | 02~30WAY
 | | | G:GOLD/PLATE
 | | | NON POST
 | | | 90°SMT

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION