


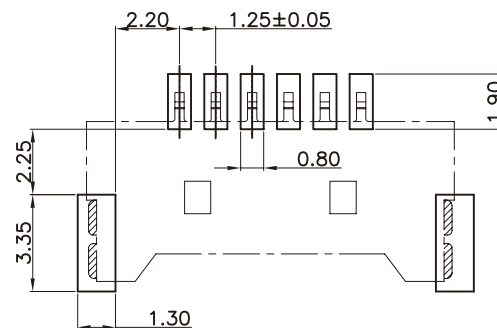
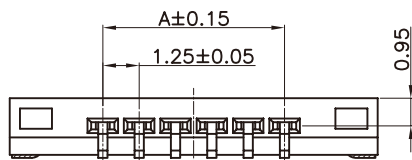



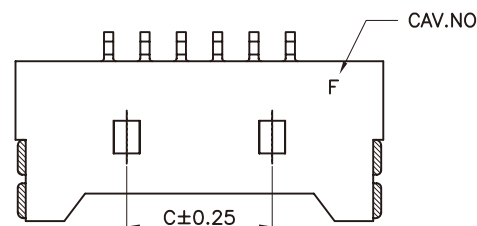

P.C.B. LAYOUT



Mating Condition (REF.)

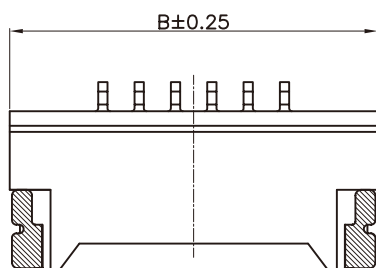

Circuit 1

NOTES:

1. MATERIAL:
INSULATION: LCP UL 94V-0 (CREAM)
CONTACT: PHOSPHOR BRONZE
SOLDER TAB: PHOSPHOR BRONZE / 60u" MATTE TIN PLATED OVER NICKEL
2. CONTACT FINISH: --60u" MATTE-TIN PLATED OVER NICKEL
--GOLD FLASH OVER NICKEL
--*u" GOLD PLATED OVER NICKEL
3. PACKING: 2000 PCS/TAPE REEL

Pin	DIM. (mm)			Pin	DIM. (mm)		
	A	B	C		A	B	C
2	1.25	7.65		13	15.00	21.40	13.75
3	2.50	8.90		14	16.25	22.65	15.00
4	3.75	10.15	2.50	15	17.50	23.90	16.25
5	5.00	11.40	3.75	16	18.75	25.15	17.50
6	6.25	12.65	5.00	18	21.25	27.65	20.00
7	7.50	13.90	6.25	20	23.75	30.15	22.50
8	8.75	15.15	7.50	22	26.25	32.65	22.50
9	10.00	16.40	8.75	24	28.75	35.15	22.50
10	11.25	17.65	10.00	26	31.25	37.65	22.50
11	12.50	18.90	11.25	28	33.75	40.15	22.50
12	13.75	20.15	12.50	30	36.25	42.65	22.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±


PPOJECTION

照片框

ORDER INFORMATION

PNM-WXR-xx-LF
SERIES T T LEADFREE
02~30WAY
REEL
NON POST
90°SMT

DESCRIPTION: WIRE TO BOARD, RECEPTACLE, PITCH 1.25mm, RIGHT ANGLE SMT TYPE, ASSEMBLY

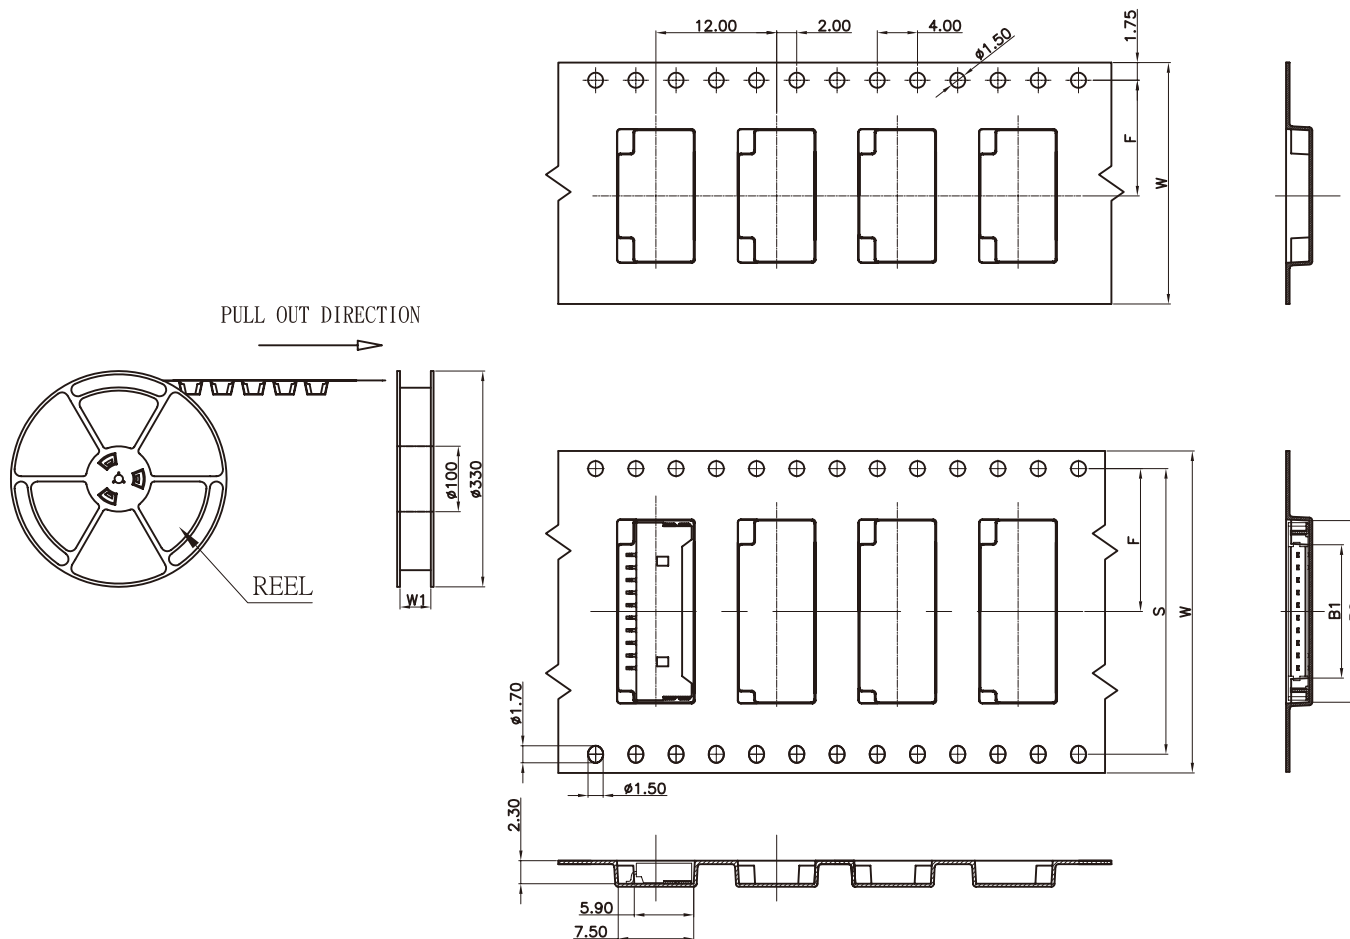

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20 .
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm.
3. MATERIAL : BLACK CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
4. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
5. THICKNESS : 0.35 ± 0.05 mm.
6. COMPONENT LOAD PER 13" REEL : 2000 PCS.

PIN	DIM. (mm)					
	B0	B1	F	W	W1	S
6	13.05	8.25	11.50	24.00	24.50	-
7	14.30	9.50	11.50	24.00	24.50	-
8	15.55	10.75	11.50	24.00	24.50	-
9	16.80	12.00	11.50	24.00	24.50	-
10	18.05	13.25	15.50	32.00	32.50	28.40
11	19.30	14.50	15.50	32.00	32.50	28.40
12	20.55	15.75	15.50	32.00	32.50	28.40
13	21.80	17.00	15.50	32.00	32.50	28.40
14	23.05	18.25	21.50	44.00	44.50	40.40
15	24.30	19.50	21.50	44.00	44.50	40.40
16	25.55	20.75	21.50	44.00	44.50	40.40
17	26.80	22.00	21.50	44.00	44.50	40.40
18	28.05	23.25	21.50	44.00	44.50	40.40
19	29.30	24.50	21.50	44.00	44.50	40.40
20	30.55	25.75	21.50	44.00	44.50	40.40
21	31.80	27.00	21.50	44.00	44.50	40.40
22	33.05	28.25	21.50	44.00	44.50	40.40
23	34.30	29.50	21.50	44.00	44.50	40.40
24	35.55	30.75	27.50	56.00	56.50	52.40
25	36.80	32.00	27.50	56.00	56.50	52.40
26	38.05	33.25	27.50	56.00	56.50	52.40
27	39.30	34.50	27.50	56.00	56.50	52.40
28	40.55	35.75	27.50	56.00	56.50	52.40
29	41.80	37.00	27.50	56.00	56.50	52.40
30	43.05	38.25	27.50	56.00	56.50	52.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.30
X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG $\pm$


PPOJECTION

照片框


ORDER INFORMATION

PNM-WXR-xx-LF
SERIES T T LEADFREE
02-30WAY
REEL
NON POST
90°SMT


DESCRIPTION: WIRE TO BOARD, RECEPTACLE, PITCH 1.25mm, RIGHT ANGLE SMT TYPE, ASSEMBLY

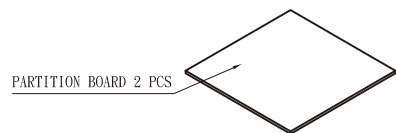

PARTITION BOARD 2 PCS




PROTECT TAPE

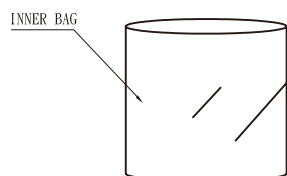

INNER BAG




TRIANGLE BOARD 4 PCS

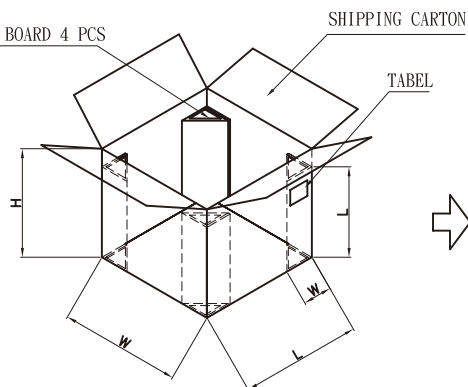

SHIPPING CARTON

TABEL



PACKING MATERIAL	
PART NAME	DIM. (mm)
REEL	Ø330*(W+0.5)
CARTON	350*350*340

PACKING CAPACITY			
PART NO.	PCS/RE	RE/BC	PCS/BC
PNM-WXR-06	2000PCS/RE	10RE/BC	20,000PCS/BC
PNM-WXR-07	2000PCS/RE	10RE/BC	20,000PCS/BC
PNM-WXR-08	2000PCS/RE	10RE/BC	20,000PCS/BC
PNM-WXR-09	2000PCS/RE	10RE/BC	20,000PCS/BC
PNM-WXR-10	2000PCS/RE	8RE/BC	16,000PCS/BC
PNM-WXR-11	2000PCS/RE	8RE/BC	16,000PCS/BC
PNM-WXR-12	2000PCS/RE	8RE/BC	16,000PCS/BC
PNM-WXR-13	2000PCS/RE	8RE/BC	16,000PCS/BC
PNM-WXR-14	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-15	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-16	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-17	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-18	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-19	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-20	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-21	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-22	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-23	2000PCS/RE	6RE/BC	12,000PCS/BC
PNM-WXR-24	2000PCS/RE	5RE/BC	10,000PCS/BC
PNM-WXR-25	2000PCS/RE	5RE/BC	10,000PCS/BC
PNM-WXR-26	2000PCS/RE	5RE/BC	10,000PCS/BC
PNM-WXR-27	2000PCS/RE	5RE/BC	10,000PCS/BC
PNM-WXR-28	2000PCS/RE	5RE/BC	10,000PCS/BC
PNM-WXR-29	2000PCS/RE	5RE/BC	10,000PCS/BC
PNM-WXR-30	2000PCS/RE	5RE/BC	10,000PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

PNM-WXR-xx-LF
SERIES | | LEADFREE
| | 02~30WAY
| REEL
| NON POST
90°SMT

DESCRIPTION: WIRE TO BOARD, RECEPTACLE, PITCH 1.25mm, RIGHT ANGLE SMT TYPE, ASSEMBLY