


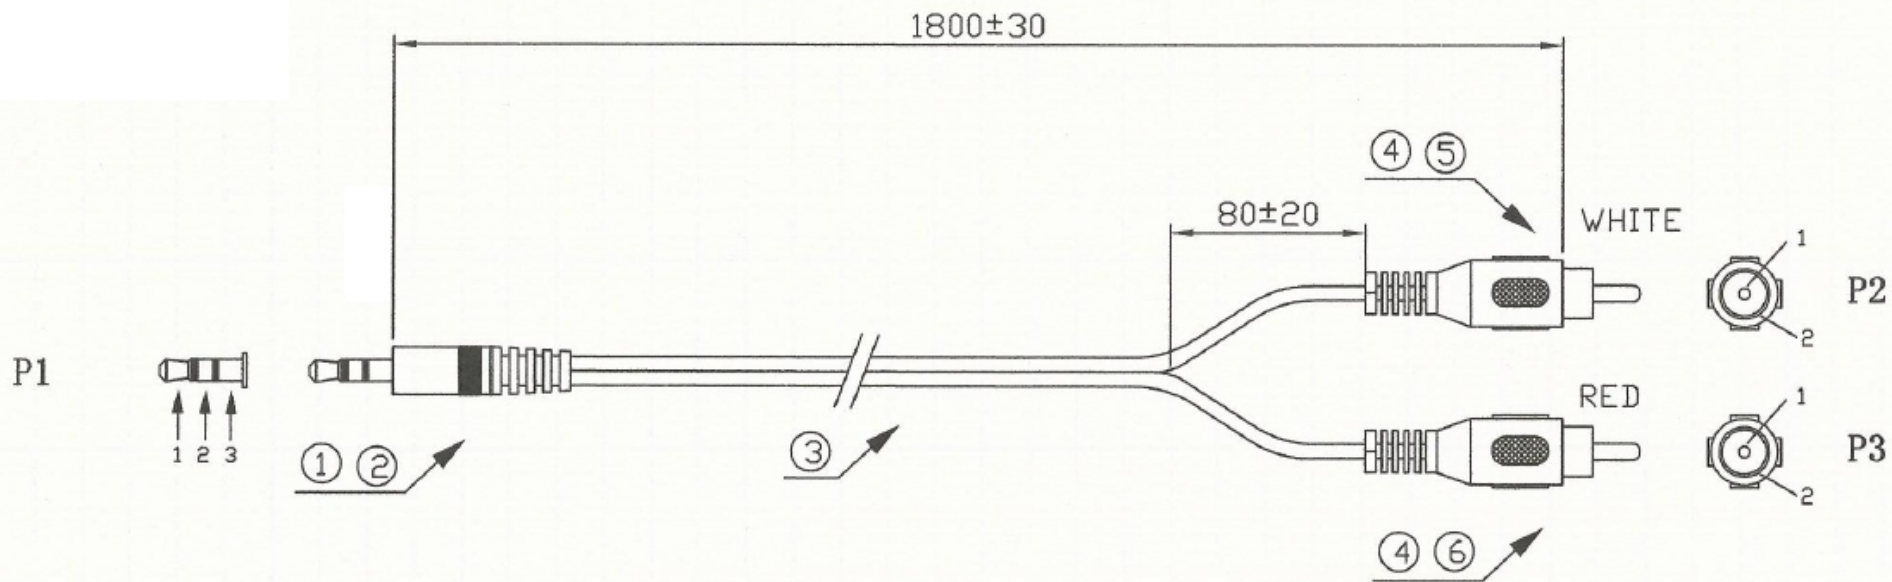

WIRING DIAGRAM

P1	P2	P3	WIRE COLOR
1	1		WHITE
2		1	RED
3	2	2	S

ELECTRICAL SPECIFICATION:

- 1.100% OPEN SHORT&MISS WIRE TEST
- 2.VOLTAGE:DC 300V
- 3.INSULATOR RESISTANCE:2M OHM MIN
- 4.CONDUCTIVE RESISTANCE:5 OHM MAX

No.	NAME	DESCRIPTION	Q' TY
①	CONNECTOR	3.5 STEREO PLUG;THREE PARTS;GOLD PLATED	1PC
②	PVC	45P PVC; BLACK ;RoHS	20G
③	CABLE	NO-UL {(7*0.10BC)*1C+S(26*0.09BC)}*2F OD:2.5*5.0MM BLACK L=1800MM	1PC
④	CONNECTOR	RCA MALE;ENCLOSED;GOLD PALTED;WHITE INSULATION	2PCS
⑤	PVC	45P PVC; WHITE ;RoHS	25G
⑥	PVC	45P PVC; RED ;RoHS	25G

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
X.±
.XX±
.XXX±
ANG±

ORDER INFORMATION

PNRCX12-030228-M1M8-LF

SERIES

LEADFREE

1800mm

MALE TO MALE

28WAY

03WAY TO RCAX2

DESCRIPTION: