


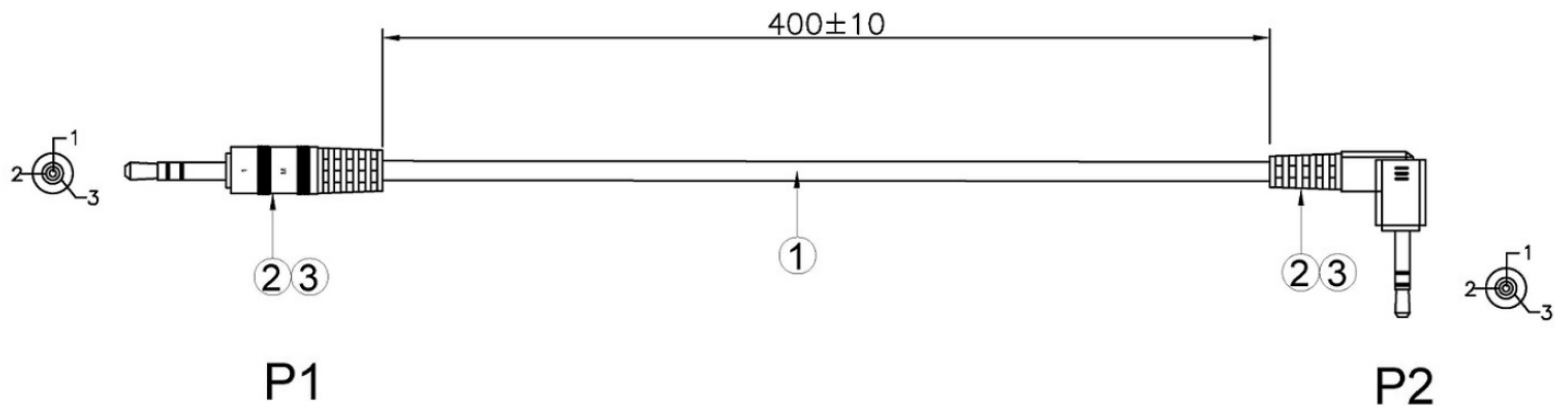

P1	P2
1	1
2	2
3	3

NOTE:

- 1.导通阻抗 Conductor resistance.: 5 Ohms Max.
- 2.绝缘阻抗 Insulation resistance.: 10M Ohms Min.
- 3.高压 HI-POT Test.: DC 300V/0.01sec.
- 4.成品須100%导通、短断路、错位测试.
100% Test Open、Short & Miswire.
- 5.100%成品外观检验与尺寸量测.
100% Product inspection and dimensional measurement.

4	PACKING	10PCS/PE BAG	1
3	PVC	45P BLACK PVC	20g
2	CONN.	DC3.5 STEREO MALE	2
1	CABLE	UL2547 28AWG*2C+S OD:3.0 black L:450mm	1
ITEM	NAME	DESCRIPTION	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PNX2-03R0328-M40C-LF

SERIES
LEADFREE
400mm
MALE TO MALE
28 AWG
03P 90° TO 03P

DESCRIPTION: